Panasonic ideas for life







Broadcast-Grade Performance Plus Focus Assist and a Viewfinder Terminal Ideal for On-camera and Field Applications, including Mobile Vehicles

The BT-LH80W is a small, lightweight HD/SD LCD monitor designed for field acquisition or live relay use. Inheriting circuitry from the popular BT-LH1700W, this versatile monitor delivers a full broadcast-grade display performance. It also introduces new

Focus-in-Red and Pixel-to-Pixel functions that make critical HD camera focusing quick and easy. Connecting directly to the viewfinder terminal of a Panasonic HD camera-recorder, the BT-LH80W provides powerful support as a wide 7.9-inch color viewfinder.

Its high performance and versatile functions also make it ideal for use in mobile vehicles.



fron



rear

Outstanding Display Performance with circuitry inherited from the BT-LH1700W

I/P Conversion Circuit for Motion Response

A new I/P conversion algorithm reduces the delay time between the input signal and the monitor to a length of less than one field.

Diagonal Line Compensation

Jagged noise on diagonal lines in moving images is a common problem. The BT-LH80W solves this by detecting correlations in the diagonal direction, resulting in smooth, precision reproduction of moving images.

High-Speed Response

The BT-LH80W incorporates an overdrive circuit that improves response in intermediate gradations, allowing it to display vivid images with no blurring, especially during scenes with motion.

HD/SD Multi-Format Compatibility

Compatible with most HD and SD formats, the BT-LH80W is ideal for a wide range of applications in locations around the world.

Focus Assist Functions for HD Shooting

Focus-in-Red

This function emphasizes the sharply focused area of the image by showing it in an easily visible red, making it easier to focus the camera.





ON Image

OFF Image

Pixel-to-Pixel

This function lets you see the input signal in a pixel to pixel relationship without resizing, making it easier to make focus adjustments. With 1080/60i input signals, you can check the focus with a screen width equivalent to 19 inches.

Useful Functions

Waveform Monitoring

The input signal is displayed as a waveform for monitoring. Display of the waveform can be displayed in the lower right portion of the screen.

Cross Hatch

Simple Cross Hatch overlay display (at 50 dots interval, fixed) to check the tilt of camera. You can allocate the cross hatch function to any of the three "Function" keys.





Other Useful Functions

- Tally lamps (front: red/green, back: red)
- · Marker and blue-only functions
- Compatible with 16:9 and 4:3 aspect ratios
- RS-232C and GPI remote control terminals

Interfaces and Design Suited to the Field

Thin, Small and Lightweight

Making full use of the LCD panel's thinness and light weight, the BT-LH80W is only 2-5/8" (65 mm) deep and weighs just 3.3 lbs (1.5kg).

DC Operation and Low Power Consumption

DC operation (Anton Bauer/DC IN) makes the BT-LH80W ideal for use outdoors. Power consumption is very low, despite its HD/SD compatibility.

Connection as a Viewfinder

BNC cable connection also makes it possible to use SDI (optional) or component input not only from Panasonic camera-recorders but also from other brand cameras.


Equipped with a 15-pin viewfinder terminal, the BT-LH80W can also be used as a viewfinder for compatible Panasonic camera-recorders — AJ-HDX900, AJ-HDC27H,

AJ-HPX2000/2100 and AG-HPX500/502. You can also run the BT-LH80W on DC power supplied by these camera-recorders. Connection is easy, requiring only a viewfinder cable and DC power cable.

Supported Video Format

| Input Signal | VIDEO | VF-VIDEO | VF-YPBPR | YPBPR | SDI (option) |
|---------------|-------|----------|----------|-------|-----------------|
| NTSC | yes | yes | | | |
| PAL | yes | yes | | | |
| 480/59.94i | | | yes | yes | yes |
| 480/59.94P | | | yes | yes | |
| 576/50i | | | yes | yes | yes |
| 576/50P | | | yes | yes | |
| 720/50P | | | yes | yes | yes |
| 720/59.94P | | | yes | yes | yes |
| 720/60P | | | yes | yes | yes |
| 1035/59.94i* | | | yes | yes | yes |
| 1035/60i* | | | yes | yes | yes |
| 1080/23.98Psf | | | yes | yes | yes |
| 1080/24Psf | | | yes | yes | yes |
| 1080/50i | | | yes | yes | yes |
| 1080/59.94i | | | yes | yes | yes |
| 1080/60i | | | yes | yes | yes |

^{*}Indicates display with 1080/59.94i or 1080/60i, instead of 1035/59.94i or 1035/60i

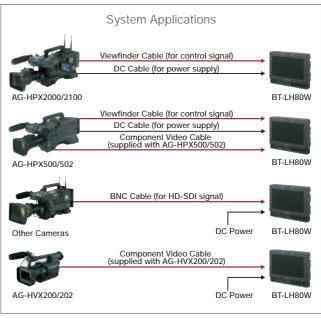

^{*}Mounting bracket is required to mount on a Camera-Recorder.

Optional Accesories




BT-YA80G SDI INPUT UNIT



BT-CS80G VF Cable (Viewfinder Cable, DC Cable)

Specifications

Power Requirements: DC12V (11 to 17V) DC Input (XLR 4-pin) or Anton Bauer Battery Power Consumption: DC12V, 1.5A Weight: 3.3 lbs (1.5kg) 8-3/4" x 6-11/16" x 2-5/8" Dimensions: $(W \times H \times D)$ (218 x 166 x 65 mm) LCD Panel: 7.9", 16:9 aspect ratio Display colors: 16,770,000 colors Resolution: 800 x 450 pixels Viewing Angle: 110° Vertical, 120° Horizontal VIDEO, Y/Pb/Pr (BNC), 1 ch Video Input: Viewfinder terminal (15-pin) Remote: GPI (D-sub 9-pin), RS-232C (D-sub 9-pin) SDI INPUT UNIT. Option:

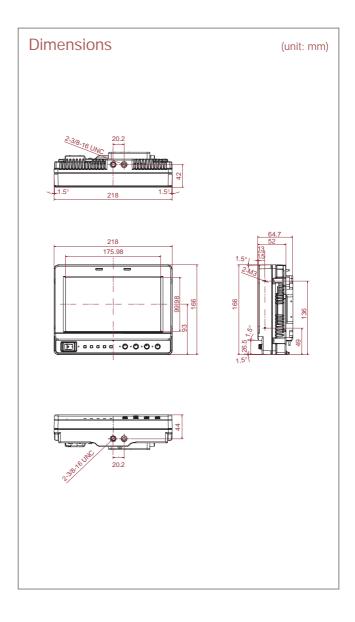

Panasonic

Matsushita Electric Industrial Co., Ltd. Systems Business Group

2-15 Matsuba-cho, Kadoma, Osaka 571-8503

Japan

Phone +81 6 6905 4650 Fax +81 6 6908 5969 https://eww.pavc.panasonic.co.jp/pro-av/

[Countries and Regions]

VF cable (Viewfinder Cable, DC Cable)

+54 1 308 1610 +61 2 9986 7400 Argentina Australia +43 (0)1 610 80 773 +973 252292 Austria Bahrain +32 (0)2 481 04 57 Belgium +359 2 946 0786 +55 11 3889 4035 Bulgaria Brazil Canada China +1 905 624 5010 +86 10 6515 8828 (Hong Kong Czech Republic +852 2313 0888) +420 236 032 552/511 +45 43 20 08 57 +20 2 3938151 Denmark

France Germany Greece Hungary Indonesia Iran Italy Jordan

Egypt +20 2 3938151 Finland, Latvia, Lithuania, Estonia +358 (9)521 52 53 +33 (0)1 55 93 66 67 +49 (0)611 235 401 +30 210 96 92 300 +36 (1)382 60 60 +62 21 385 9449 +98 21 2271463 +39 02 67 88 449 +961 6 586 1914 Kazakhstan +7 3272 504 777 +82 2 2106 6641

+965 481 2123 +961 1 216827 Lebanon +60 3 5549 5422 (PSE) +60 3 5546 7000 (PM) Malaysia Mexico +52 55 5488 1000 Montenegro, Se

+41 (0)26 466 25 20 Netherlands New Zealand +31 73 64 02 577 +64 9 272 0100 Norway Pakistan +47 67 91 78 00 +92 5370320 21

+51 1 614 0000 Philippines +63 2 633 6162 +48 (22)338 1100 +351 21 425 77 04 +1 787 750 4300 +40 21 211 4855 Poland Portugal Puerto Rico Romania Russia & CIS +7 095 258 42 06 Saudi Arabia Singapore

Panama

+966 1 465 0709 +65 6270 0110 Slovak Republic +421 (0)2 52 92 14 23 Slovenia, Croatia, Bosnia, Macedonia +44 (0)20 76 63 36 57 +27 11 313 1400

+507 229 2955

Spain Sweden Switzerland Taiwan Thailand Turkey U.A.E.

U.K U.S.A.



+380 44 4903437 +380 44 4903438

[ext. 112] +44 (0) 1344 70 69 20 +1 201 348 5300









South Africa

^{*}The specifications shown above are subject to change without notice

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com