

**Ordering Information**

Catalog No.	Finish	Mounting	Lamps
22OR2WH	Matte White	All Lytespan Track Systems.	PAR20 Maximum 50W
22OR2BK	Matte Black	Does not mount on ProSpec Track.	
22OR2AL	Metallic Aluminum		

**Features**

- Track Attachment Fitting:** Locking lever for mechanical/electrical connection
- Brass Contact:** Extends for connection to second circuit (Advent Lytespan track only)
- Horizontal Pivot:** Wireless stem profile with 365° horizontal rotation
- Vertical Pivot:** 0-90° vertical adjustment
- Socket:** Porcelain socket, medium base, nickel-plated screw shell
- Housing:** Die cast aluminum
- Accessory cartridge:** Included; rotate clockwise to attach; retaining ring included

**Finish**

All Painted finishes are baked enamel.

**Dimming**

Fixture may be used on a track with a dimmer. Consult dimmer manufacturer for correct dimmer selection.

**Accessories**

- Accessory Holder:** Integral
- Accessories:** Accepts two total (1 lens + 1 louver or 2 lenses)
- Lens:** AF25, ADF25. Not compatible with AF25IR
- Louver:** AL25HC

**Labels**

UL, cUL

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2005 Genlyte Group LLC • B0205

**LIGHTOLIER®**




**AIMING ANGLE:**

- L Beam length
- W Beam Width
- C Distance to center beam
- D Distance
- A Aiming Angle
- FC Footcandles

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance. CBCP= Center Beam Candle Power.

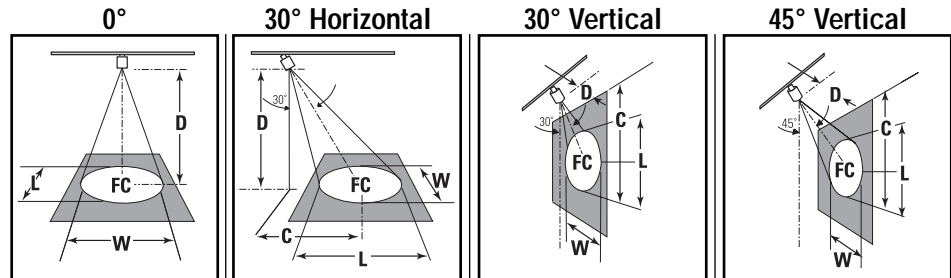

**LAMP**

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (hrs.)	D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	
50W PAR20 SP	10°	4,600	2,500	6' 8'	128	1.0'	1.0'	8' 12'	4.6'	47	1.9'	1.6'	2' 3'	3.5'	144	1.4'	0.7'	4' 5'	4.0'	102	1.4'	1.0'	1.0'
50W PAR20 NFL	25°	1,500	2,500	4' 6'	116	1.9'	1.9'	3' 5'	2.9'	134	2.0'	1.7'	1' 1.7'	1.7'	231	2.3'	1.0'	3' 3.0'	3.0'	73	3.1'	2.0'	2.0'
50W PAR30 FL	35°	1,400	3,000	6' 7'	39	3.8'	3.8'	6' 2.9'	4.0'	25	4.6'	3.9'	2' 3.5'	5.2'	44	7.2'	2.5'	3' 2.9'	5.5'	41	4.1'	2.7'	2.7'
60W PAR16 NSP	10°	5,000	2,000	6' 8'	139	1.0'	1.0'	7' 4.0'	6.6'	16	1.6'	1.4'	3' 3.5'	6.9'	156	1.4'	0.7'	5' 3.0'	3.0'	196	1.1'	0.7'	0.7'
60W PAR16 NFL	30°	1,300	2,000	3' 5'	144	1.6'	1.6'	5' 2.9'	3.4'	37	3.1'	3.1'	2' 3.5'	4.1'	163	2.7'	1.1'	3' 3.0'	3.0'	51	3.5'	2.3'	2.3'
75W PAR30 NSP	10°	13,000	3,000	8' 12'	219	1.3'	1.3'	10' 5.8'	9.1'	15	1.5'	1.8'	3' 5.2'	10.9'	194	1.9'	0.9'	5' 5.0'	5.0'	196	1.6'	1.1'	1.1'
75W PAR30 NFL	25°	3,800	3,000	6' 8'	106	2.7'	2.7'	8' 4.6'	3.9'	69	3.6'	3.1'	2' 3.5'	5.3'	119	4.2'	1.8'	4' 4.0'	4.0'	84	3.7'	2.5'	2.5'
90W PAR38 NSP	9°	19,500	2,500	10' 15'	195	1.6'	1.6'	12' 6.9'	8.8'	17	1.5'	1.5'	4' 6.9'	15.2'	152	2.6'	1.3'	6' 6.0'	6.0'	192	1.9'	1.3'	1.3'
90W PAR38 SP	12°	14,500	2,500	8' 12'	227	1.7'	1.7'	7' 4.0'	5.8'	117	3.4'	2.9'	3' 5.2'	11.3'	201	2.6'	1.3'	5' 5.0'	5.0'	205	2.1'	1.5'	1.5'
90W PAR38 NFL	28°	4,500	2,500	6' 8'	125	3.0'	3.0'	7' 4.0'	6.0'	117	3.4'	2.9'	3' 5.2'	6.3'	141	4.9'	2.0'	4' 5.0'	5.0'	177	3.2'	2.1'	2.1'
90W PAR38 WFL	55°	2,250	2,500	6' 7'	63	6.2'	6.2'	8' 4.6'	3.0'	41	9.2'	7.2'	2' 3.5'	7.0'	70	44.5'	4.2'	3' 3.0'	3.0'	199	5.7'	2.9'	2.9'
120W PAR38 NSP	10°	25,000	3,000	10' 15'	250	1.7'	1.7'	12' 6.9'	11.3'	28	2.4'	2.4'	4' 6.9'	18	195	2.9'	1.4'	6' 6.0'	6.0'	246	2.1'	1.5'	1.5'
120W PAR38 FL	30°	4,600	3,000	6' 8'	139	3.2'	3.2'	7' 4.0'	6.6'	130	3.7'	3.1'	3' 5.2'	9.9'	156	5.5'	2.1'	5' 3.0'	3.0'	196	3.5'	2.3'	2.3'
120W PAR38 WFL	55°	2,000	3,000	4' 6'	125	3.7'	3.7'	5' 2.9'	5.2'	144	4.0'	3.2'	1' 1.7'	6.9'	250	10.7'	1.9'	4' 4.0'	4.0'	79	7.2'	4.0'	4.0'
250W PAR38 SP	10°	46,500	4,500	12' 20'	323	2.1'	2.1'	16' 9.2'	11.8'	210	2.8'	2.4'	10' 17.3'	58	161	4.3'	2.1'	12' 12.0'	12.0'	457	2.1'	1.5'	1.5'
250W PAR38 FL	30°	9,000	4,500	8' 10'	141	4.3'	4.3'	8' 4.6'	5.8'	91	5.9'	5.0'	3' 5.2'	12.5'	125	8.2'	3.2'	4' 4.0'	4.0'	199	4.6'	3.0'	3.0'

Job Information  Type:

Lightolier a Genlyte company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2005 Genlyte Group LLC • B0205

LIGHTOLIER®

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>