

() Denotes dimensions in mm

Ordering Information

Catalog No.	Finishes	Track Mounting	Lamp
DR2PS16WH DR2PS16BK DR2PS16SL	White Black Silver	Compatible with all ProSpec Track Systems	MR16, 50W Max. with cover glass

Description

Remote controlled spotlight that can be mounted anywhere along the track and remotely aimed through the use of a hand-held controller.

Features

1. Full remote control of pan and tilt movement to aim at any object below the luminaire.
2. Lamp brightness can be adjusted in 1% steps.
3. Compatible with external dimming systems.
4. Positions and dim setting can be recorded for future use.
5. Continuous movement and sequencing option.
6. Die-cast aluminum housing.
7. Electronic low voltage transformer.

Labels

cULus Classified

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • C1108

Lighting Data

Aiming Angle

- L Beam Length
- W Beam Width
- C Distance to center beam
- D Distance
- A Aiming Angle
- FC Footcandles

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam.

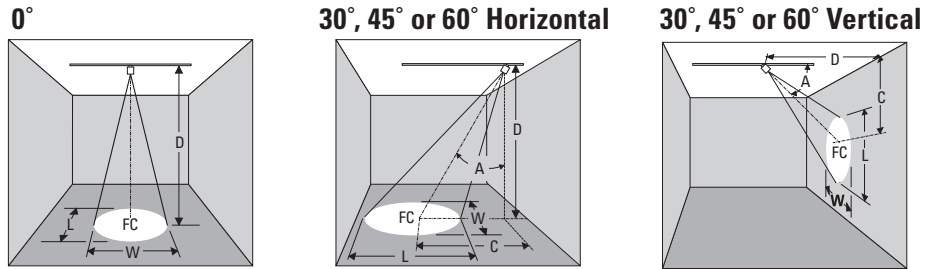

LAMP

LAMP	Beam Spread 50% Max CP	Beam Center C.P. Candules	Rated Life-Hrs	0° AIMING ANGLE					A=30° AIMING ANGLE					A=45° AIMING ANGLE					A=60° AIMING ANGLE				
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	
35W AR111 SSP (T-H)	3°	45000	20C3	15'	200	0.8'	0.8'	10'	5.8'	292	0.7'	0.6'	8'	8.0'	249	0.8'	0.6'	5'	8.7'	225	1.0'	0.5'	
				20'	113	1.0'	1.0'	15'	8.7'	130	1.0'	0.9'	12'	12.0'	110	1.3'	0.9'	8'	13.9'	88	1.7'	0.8'	
				25'	72	1.3'	1.3'	20'	11.5'	73	1.4'	1.2'	16'	16.0'	62	1.7'	1.2'	11'	19.1'	46	2.3'	1.2'	
				30'	50	1.6'	1.6'	25'	14.4'	47	1.7'	1.5'	20'	20.0'	40	2.1'	1.5'	14'	24.2'	29	2.9'	1.5'	
35W AR111 SP (T-H)	10°	15000	20C3	8'	234	1.4'	1.4'	7'	4.0'	199	1.6'	1.4'	5'	5.0'	212	1.8'	1.2'	3'	5.2'	208	2.1	1.0'	
				12'	104	2.1'	2.1'	10'	5.8'	97	2.3'	2.0'	7'	7.0'	108	2.5'	1.7'	4'	6.9'	117	2.9	1.4'	
				16'	59	2.8'	2.8'	13'	7.5'	58	3.0'	2.6'	9'	9.0'	65	3.2'	2.2'	5'	8.7'	75	3.6'	1.7'	
				20'	38	3.5'	3.5'	16'	9.2'	38	3.7'	3.2'	11'	11.0'	44	3.9'	2.7'	6'	10.4'	52	4.3'	2.1'	
35W AR111 FL (T-H)	30°	20C3	20C3	4'	125	2.1'	2.1'	3'	1.7'	144	2.2'	1.9'	3'	3.0'	79	3.5'	2.3'	1'	1.7'	250	2.7	1.1'	
				5'	56	3.2'	3.2'	5'	2.9'	52	3.7'	3.1'	4'	4.0'	44	4.6'	3.0'	2'	3.5'	63	5.5'	2.1'	
				8'	31	4.3'	4.3'	7'	4.0'	27	5.1'	4.3'	5'	5.0'	28	5.8'	3.8'	3'	5.2'	28	8.2'	3.2'	
				10'	20	5.4'	5.4'	9'	5.2'	16	6.6'	5.8'	6'	6.0'	20	6.9'	4.5'	4'	6.9'	16	10.9'	4.3'	
50W AR111 NSP (T-H)	5°	50000	20C3	15'	222	1.3'	1.3'	10'	5.8'	325	1.2'	1.0'	8'	8.0'	276	1.4'	1.0'	5'	8.7'	250	1.8	0.9'	
				20'	125	1.7'	1.7'	15'	8.7'	144	1.7'	1.5'	12'	12.0'	123	2.1'	1.5'	8'	13.9'	98	2.8'	1.4'	
				25'	80	2.2'	2.2'	20'	11.5'	81	2.3'	2.0'	16'	16.0'	69	2.8'	2.0'	11'	19.1'	52	3.9'	1.9'	
				30'	56	2.5'	2.6'	25'	14.4'	57	2.9'	2.5'	20'	20.0'	44	3.5'	2.5'	14'	24.2'	37	4.9'	2.4'	
50W AR111 SP (T-H)	10°	20000	20C3	10'	200	1.7'	1.7'	8'	4.6'	203	1.9'	1.6'	6'	6.0'	196	2.1'	1.5'	4'	6.9'	156	2.9	1.4'	
				15'	89	2.6'	2.6'	12'	6.9'	90	2.8'	2.4'	9'	9.0'	87	3.2'	2.2'	6'	10.4'	69	4.3'	2.1'	
				20'	50	3.5'	3.5'	16'	9.2'	51	3.7'	3.2'	12'	13.0'	49	4.2'	3.0'	8'	13.9'	39	5.7'	2.8'	
				25'	32	4.4'	4.4'	20'	11.5'	32	4.7'	4.0'	15'	15.0'	31	5.3'	3.7'	10'	17.3'	25	7.2'	3.5'	
50W AR111 FL (T-H)	30°	30C3	20C3	5'	83	3.2'	3.2'	5'	2.9'	78	3.7'	3.1'	3'	3.0'	118	3.5'	2.3'	2'	3.5'	94	5.5'	2.1'	
				8'	47	4.3'	4.3'	7'	4.0'	40	5.1'	4.3'	4'	4.0'	42	5.8'	3.8'	3'	5.2'	42	8.2'	3.2'	
				10'	30	5.4'	5.4'	9'	5.2'	24	6.6'	5.6'	5'	5.0'	22	8.1'	5.3'	4'	6.9'	23	10.9'	4.3'	
				12'	21	6.4'	6.4'	11'	6.4'	16	8.1'	6.8'	6'	6.0'	13	10.4'	6.8'	5'	8.7'	15	13.7'	5.4'	
75W AR111 SP (T-H)	10°	25000	20C3	10'	250	1.7'	1.7'	8'	4.6'	254	1.9'	1.6'	6'	6.0'	246	2.1'	1.5'	4'	6.9'	195	2.9	1.4'	
				15'	111	2.6'	2.6'	12'	6.9'	113	2.8'	2.4'	9'	9.0'	109	3.2'	2.2'	6'	10.4'	87	4.3'	2.1'	
				20'	63	3.5'	3.5'	16'	9.2'	63	3.7'	3.2'	12'	13.0'	61	4.2'	3.0'	8'	13.9'	49	5.7'	2.8'	
				25'	40	4.4'	4.4'	20'	11.5'	41	4.7'	4.0'	15'	15.0'	39	5.3'	3.7'	10'	17.3'	31	7.2'	3.5'	
75W AR111 FL (T-H)	30°	4500	20C3	5'	125	3.7'	3.7'	5'	2.9'	117	3.7'	3.1'	3'	3.0'	177	3.5'	2.3'	2'	3.5'	141	5.5'	2.1'	
				8'	70	4.3'	4.3'	7'	4.0'	60	5.1'	4.3'	4'	4.0'	64	5.8'	3.8'	3'	5.2'	63	8.2'	3.2'	
				10'	45	5.4'	5.4'	9'	5.2'	36	6.6'	5.8'	5'	5.0'	32	8.1'	5.3'	4'	6.9'	35	10.9'	4.3'	
				12'	31	6.4'	6.4'	11'	6.4'	24	8.1'	6.8'	6'	6.0'	20	10.4'	6.8'	5'	8.7'	23	13.7'	5.4'	
75W AR111 WFL (T-H)	60°	1300	20C3	3'	144	3.5'	3.5'	3'	1.7'	94	5.2'	4.0'	2'	2.0'	115	6.9'	3.3'	1'	1.7'	163	†	2.3'	
				5'	52	5.8'	5.8'	5'	2.9'	34	8.7'	6.7'	3'	3.0'	51	10.4'	4.9'	2'	3.5'	41	†	4.6'	
				7'	27	8.1'	8.1'	7'	4.0'	17	12.1'	9.3'	4'	4.0'	29	13.9'	6.5'	3'	5.2'	18	†	6.9'	
				9'	16	10.4'	10.4'	9'	5.2'	10	15.6'	12.0'	5'	5.0'	18	17.3'	8.2'	4'	6.9'	10	†	9.2'	

(† Exceeds usable limits.)

Job Information Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • C1108

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>