


6 volt emergency lighting units designed for recessed wall or ceiling installations. Units feature rugged steel construction and high output halogen lighting heads.

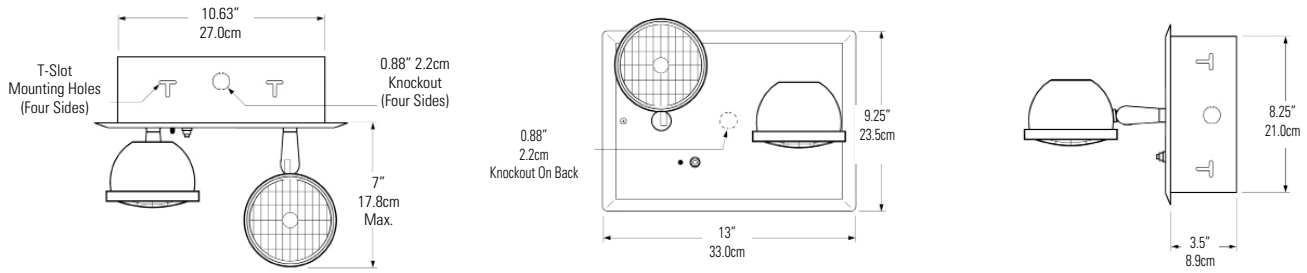

How to Specify:

MJ4	1	24L	H12	W
SERIES	VOLTAGE	BATTERY WATTAGE	LAMP TYPE	HOUSING COLOR
MJ4 = Chicago Steel Unit	1 = 6V	24L = 24 Watt, Lead Calcium	H12 = Halogen 12W	W = White

Unit Battery Capacity

Unit	DC Voltage	Lamp Wattage	Watts to 87½ of Rated Voltage*			
			1½ hrs.	2 hrs.	4 hrs.	8 hrs.
MJ4	6	26	26	20	15	12

* Per NEC Specifications

Features

- 1. Illumination:** High output incandescent sealed beam lamps provide glare-free light distribution. 6 volt, 12 watt bi-pin halogen has an expected life of 100 hours.
- 2. Housing:** Heavy duty steel cabinet is finished in white baked-on powder paint providing scratch and corrosion resistance. Optional black (-B) and special color paint (-SP) finishes are available, see Options on front for ordering details. All metal lamp housing and swivel assemblies in white color to match unit housing. Lighting heads are fully adjustable and feature lockable swivels.
- 3. Installation:** Units are designed for recessed installation in wall and ceiling applications by means T-slot holes provided on all four sides of the unit housing. Mounting bars (supplied by others) allow XC-R-C unit installation in T-grid type suspended ceilings.
- 4. Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Fully automatic, temperature compensating, variable rate float charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.
- 5. Battery:** Maintenance-free, sealed, lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 65°F (19°C) to 85°F (30°C). Pure lead and nickel cadmium batteries are optional.
- 6. Input Power Requirements:** 120 VAC/277 VAC
- 7. Warranty:** Three years (excludes lamp on unit.) Battery: 3 year full, 7 years pro-rata.

Code Compliance

All models are UL924 Listed and meet NFPA 101 Life Safety Code, NEC, OSHA and City of Chicago codes

Options

- V** = Voltmeter (1)
 - A** = Ammeter (1)
 - B** = Black Finish - Housing and Lighting Heads
 - SP** = Special Paint Finish - Specify Color
 - SX** = Self-Diagnostic Circuit
 - XCP** = Pure Lead Battery
 - XCN** = Nickel Cadmium Battery
- (1) Unit has provisions for one meter option only.

Accessories

MJPG1 = Wire Guard

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • A0508

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>