

7" LCD Video Surveillance System

with 2 Indoor/Outdoor Day/Night Cameras

The SHS-2S7LD Series surveillance system offers a complete solution for home or business security. The slim 7" LCD monitor is designed to sit easily on any desk or counter and can be wall mounted. Installation is a snap and an A/V cable is included for easily connecting a TV or Monitor to the system for viewing, or a VCR for recording of video images. The weather resistant cameras offer viewing in low light with an illumination range of 13ft. (4m).



**Compact Video Surveillance
for your Home or Business**



Cameras



Monitor

FEATURES

MONITOR:

- 7" TFT LCD Monitor
- 2 channels with auto scanning function that switches between cameras
- Easy connection to TV, VCR or Monitor with the included A/V cable
- OSD (On-screen Display)
- Small footprint - fits on a desk like a picture frame
- Wall mountable or Desk stand

CAMERAS:

- Two color indoor/outdoor cameras with audio included
- Plug and Play Cameras: All-in-one camera cable (with Video, Audio & Power) plugs directly to the monitor and eliminates the need for a separate power adaptor
- 11 Hi Intensity IR LEDs provides effective night vision range of 13 ft (4 m)*
- Day / Night mode: Picture automatically switches camera to B&W delivering better clarity in low light conditions
- Built in microphone provides listen-in function from the camera to monitor
- Weather resistant IP 44 certified camera in zinc alloy housing for indoor/ outdoor use**



AUTO SEQUENTIAL VIEWING

LOREX

www.lorexcctv.com

* IR illumination range up to 13ft (4M) under ideal conditions. Objects at or beyond this range may be partially or completely obscured, depending on the camera application.

** Not for use in direct exposure to water, rain or snow

Quad Surveillance System

with 4 CCD Indoor/Outdoor Night Vision cameras*

SPECIFICATIONS

MONITOR:


LCD	7"
Resolution	480 x 234
Monitor display	Response time: Ton: 10ms Toff: 20mS
Video inputs	1Vp-p, 75 ohm
Audio inputs	1Vp-p, 600 ohm
Audio	1-way Audio
Supply voltage	12VDC, 1A, 50/60Hz
Power consumption	Approx. 800mA (IR/ON)
Operating Temp. Range	14°~122° F / -10° ~ °+50°C
Unit Weight	0.605 kg
Unit Dimensions	183mm X 54mm X 128mm (L X W X H)

CAMERA:


Image Sensor	1/3" Color CMOS
Video Format	NTSC / PAL
Effective Pixels	510°—492[NTSC] 628°—582[PAL]
Resolution	330 TV Lines
Scan System	NTSC: 525 Lines 2:1 interlace / PAL: 625 Lines 2:1 interlace
Sync System	Internal
S/N Ratio	More than 48dB
Iris	AES
AES Shutter Speed	NTSC: 1/60 ~ 1/100,000 Sec. / PAL: 1/50 ~ 1/100,000 Sec.
Minimum Illumination	3 LUX without IR LED, 0 LUX with IR LED
Video Output	Composite 1Vp-p @ 75 ohm
Lens/ Lens Mount	4.5mm Fixed
FOV (Diagonal)	NTSC:H: 52° V:40° PAL:H: 67° V:48°
Termination	4 Pin DIN
IR LED/ Night Vision Range	11PCS IR LED 850nm / 1PCS CDS / 4m / 13 Ft
Power Requirement	7.5 V DC +/- 10% (powered by the monitor)
Power Consumption	200 mA (IR/ON)
Operating Temp. Range	14°~122° F / -10° ~ °+50°C
Environmental Rating	IP 44
Built-in condenser microphone	One Way audio from camera to monitor

DIMENSIONS

MONITOR:

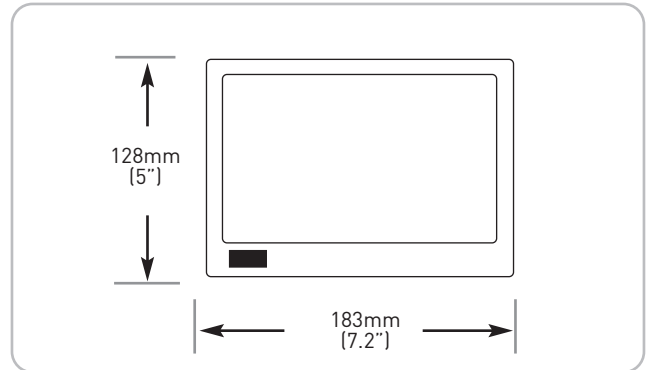

CAMERA:

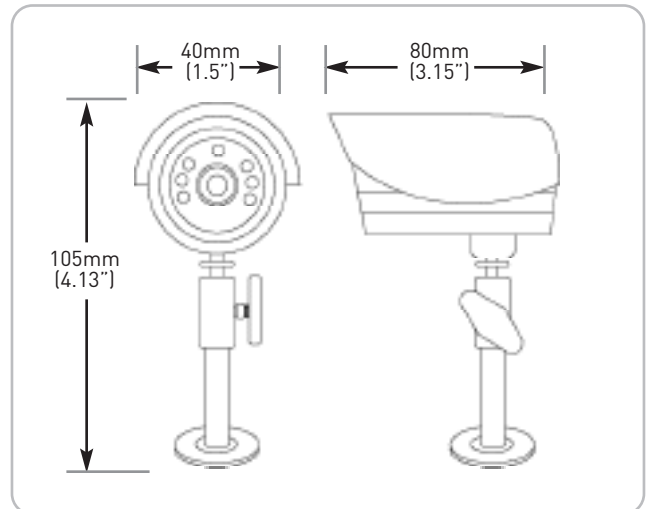

PRODUCT INFORMATION

Model #:	SHS-2S7LD Series
Description:	LCD Video Surveillance System
UPC:	SHS-2S7LD 7 78597 00027 6 SHS-2S7LDP 7 78597 00127 3
Package Dimensions:	292mm w x 305mm h x 241mm d 11.5" w x 12" h x 9.5" d
Package Weight:	4.53 kg / 10 lbs

LOREX TECHNOLOGY INC.

300 Alden Road, Markham,
Ontario L3R 4C1
Canada

3700 Koppers Street, Suite 100
Baltimore, Maryland 21227,
USA

©2007 Lorex Technology Inc.
As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>