


STEREO RADIO CASSETTE PLAYER


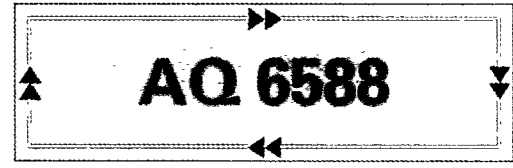


STEREO RADIO CASSETTE PLAYER

Product Main Functions

- Auto reverse
- AM/FM stereo tuner
- Dynamic Bass Boost
- Anti-rolling mechanism
- Stereo in-earphones
- High quality finishing
- Detachable belt clip
- Easy accessible volume control

AQ 6546 VS AQ 6588



Let's make things better.



PHILIPS

CASSETTE DECK

- Auto reverse
- Motor : DC, electronic control
- Full automatic stop
- Anti-rolling mechanism

TUNER

- Analog tuning
- Wavebands : AM/FM/FM stereo
- Frequency ranges : FM 87.5 - 108 MHz
AM 526.5 - 1606.5 kHz
- Wire aerial for FM via headphone cord
- Ferroceptor for AM

AMPLIFIER

- Max. output power : 2 x 5 mW RMS
- Dynamic Bass Boost (2 position)

POWER SUPPLY

- Batteries : 2 x 1.5 V, type AA/R6/UM3 cell
- External supply : 3 V DC
- LED battery indicator

CONNECTIONS

- Headphone socket : 3.5 mm
- External power supply : 3 V DC ("-" centre pin)

ACCESSORIES

- Stereo in-earphones
- Detachable belt clip

GENERAL

- Material : Polystyrene
- Weight : 190 g (excluding batteries)
- Dimensions (mm) : 118 mmW x 87 mmH x 36 mmD
- Quantity /dealer carton : 6
- Quantity /master carton : 24

3122.321.7675.2

Subject to modification without notice

**PHILIPS**

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>