


PORTABLE RADIO

▶▶
AE 1495
◀◀

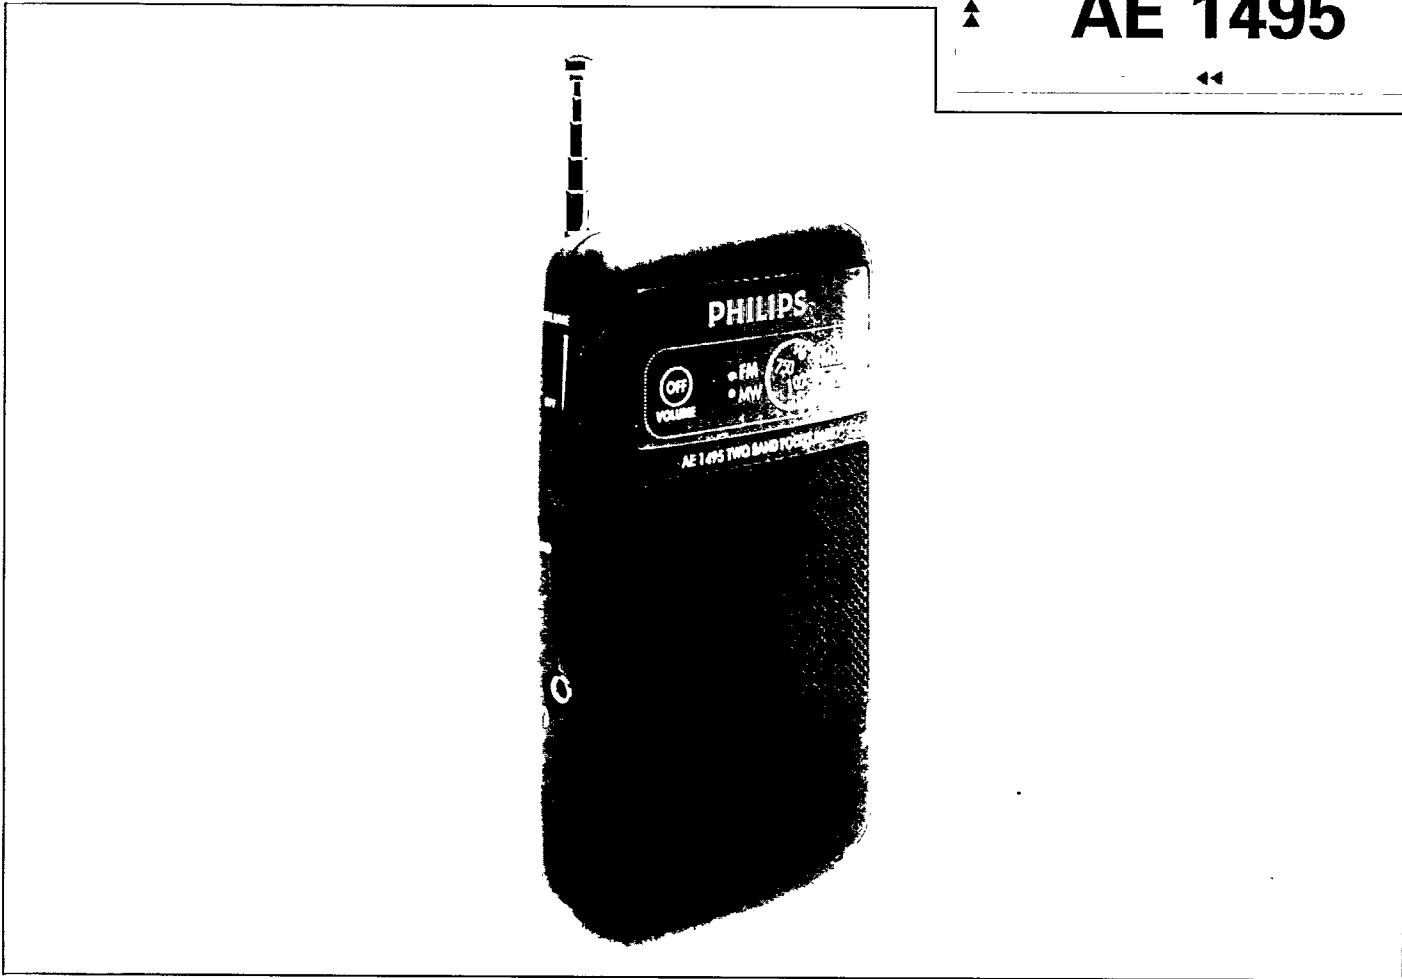

PORTABLE RECEIVER

AE 1495/00, with FM and MW
AE 1495/04, with FM and LW



RADIO

- Reception of AM and FM stations
- Telescopic and ferroceptor aerials
- Thumbwheel tuning control and slider waveband switch

AMPLIFIER

- Thumbwheel volume control with on-off switch
- Loud, good quality sound

GENERAL

- Earphone connection
- Metal speaker grille

Philips Consumer Electronics



PHILIPS

STANDARD PRODUCT INFORMATION**RADIO SECTION**

Wave ranges

AE 1495/00 :FM 87,5 - 108 MHz
:MW 526-1606.5 kHz
(571-187m)

AE 1495/04 :FM 87.5-108 MHz
LW 150-285 kHz
(2000-1053m)

Aerials :Ferroceptor for MW
(and LW)
telescopic aerial for FM

AMPLIFIER SECTION

Max. output power

(± 1 dB; D<10%) :110 mWatts

Loudspeaker :57 mm

CONNECTION

Earphone :3.5 mm socket

POWER SUPPLY

Batteries :2x 1.5V batteries, type R6,
AA-cell or UM3

CABINET

Material :polystyrene, with metal
speaker grille

Dimensions (wxhxd) :79x142x32 mm approx.

Weight :0.22 kg

Weight packed :0.29 kg

Quantity per carton :12

Subject to modification without notice

Printed in Holland

3122 321 53952

**PHILIPS**

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>