

Universal Remote Control



SBC RU 430

Instructions for Use

Mode d'emploi

Bedienungsanleitung

Gebruiksaanwijzing

Instrucciones de manejo

Manual de utilização

Istruzioni per l'uso

Οδηγίες χρήσεως

Bruksanvisning

Brugsanvisning

Bruksanvisning

Käyttöohje

Code list

PHILIPS
UNIVERSAL

Let's make things better.





PHILIPS


You just made a great choice by buying this Philips universal remote control! It takes the place of as many as three separate remote controls and can operate the most-used functions of almost any brand of TV, VCR, satellite tuner and cable decoder.

Best of all, it's quick to setup and easy to use! Here's how...

AT A GLANCE


Once you've installed the batteries, this remote is ready to work with any Philips TV, VCR or satellite tuner. Simply press the mode selector as indicated below - for the Philips device you wish to operate, and press  to test. For other brands of equipment, it needs to be set up first-see **Getting Started**.

Choose TV, VCR, SAT. The remote has 3 operating modes: TV, VCR, and satellite tuner (SAT). The green indicator LEDs show which mode you're in. To switch between modes, press  once to activate, then press it again to advance to the next mode.

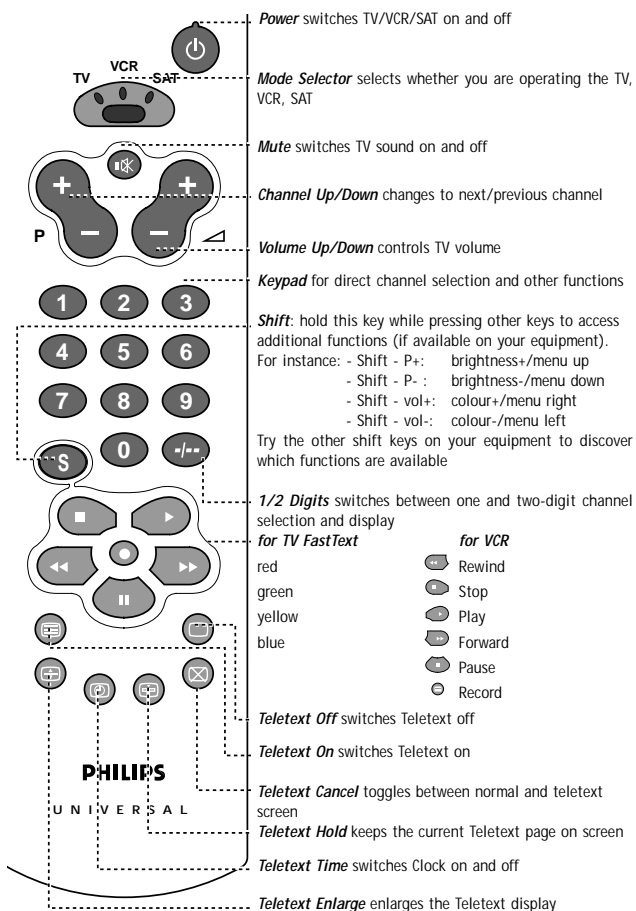

Try it out! The easiest way to find out how your new remote works, is to try pressing the keys and see what happens - don't worry, you won't damage anything! Most of the keys work just like on your original remote control. Of course, if your TV or VCR does not offer a specific function, pressing that key will have no effect.

DON'T FORGET THE BATTERIES!




You'll need two 1.5V batteries, type R03, UM4 or AAA only. Put them in like this.



Remember to replace the batteries at least once a year. Don't leave the batteries out for longer than one hour, otherwise you will need to set the remote up again.

GETTING STARTED

This remote is ready to work with any Philips TV, VCR or satellite tuner. For other brands of equipment, it needs to be set up first. That only takes a couple of seconds, thanks to Philips' Simple System Setup!

Before you start, make sure you're in the right mode for the equipment you're setting up (TV, VCR, or SAT). The green indicator LEDs show which mode is selected. To switch between modes, press  once to activate, then press it again to advance to the next mode. Also, make sure the equipment is switched on. Sit right in front of it.

If you know the brand of your equipment, look at the code list at the back of this booklet, and find the first 3-digit code for your equipment.




- ① Press and hold  and  at the same time until the green LED lights up. (Release the keys, the green LED should stay on)
- ② Enter the 3-digit code using the keypad. The green LED blinks twice.

That's it! Now, press a few keys on the remote to check that the equipment responds correctly. If it doesn't, try again using the next code in the list. In the rare instance that none of the codes work, follow the instructions in the next section.



Tip: Make a note of the code inside the battery case, and in the back of this booklet in case you ever need to setup again.


If you don't know the brand of your equipment or if you can not find it in the codelist, setup still won't take long. Philips' patented Handsfree autosearch tests all the codes one after another and finds the right one for you! The search time averages about 90 seconds. (Maximum search time is 5 minutes for TV; 2 minutes for VCR and 4 minutes for SAT.)

Make sure the TV, VCR etc. is switched on. If it's a VCR, insert a tape and start playback. You will know when the correct code has been found because the equipment will switch off or the VCR will stop playback.

- ① Press and hold  and  at the same time until the green LED lights up.
- ② Press  to start the search. Each time the green LED blinks, another code is sent. When the right code is found, the equipment switches off (the VCR will stop playing).








- ③ Immediately press  to stop the search.

If you missed the correct code because the search went too far, switch the equipment back on, then press  (down) to send the previous code again. Press  (down) repeatedly until the equipment switches off again.

- ④ Once you've found the correct code, press  to lock it in memory. The green LED blinks twice.

That's it! Now, switch the equipment manually on again, then press a few keys on the remote to check that the equipment responds correctly. In the rare instance that it doesn't, try again from step 1 to find a better code.


Note that code! To save time if you ever need to setup again, make a note of the correct code inside the battery case and in the back of this booklet. In case you have forgotten to note the code you can still 'read out' the code from the remote. Here's how:





- ① Make sure you've selected the right mode (with ). Then press and release  and  at the same time; the green LED lights up.
- ② Press . The green LED goes out.
- ③ Press  and count the number of times the green LED blinks. This is the first digit of the 3-digit code. (No blinks means the digit is zero.)
Press  and count the number of blinks for the second digit.
Press  and count the number of blinks for the third digit.

ADVANCED TIPS AND TRICKS

TO CHANGE SAT MODE TO CONTROL A SECOND TV

The SAT mode on this remote is used to control additional equipment. It is factory preset to control a satellite receiver, but you can change it to control a second TV, for example.

Before you start, press  to select SAT, and make sure the second TV is switched on.



- ① Press and hold  and  at the same time -for about 3 seconds- until the green LED lights up.
- ② On the keypad, enter 992.
- ③ Press  to select TV mode, then press any key except  once more. That's it!



Don't forget you now need to setup the remote to operate this second TV - see **Getting started**.

TO CONTROL THE SECOND TV'S VOLUME

If you have installed a second TV under SAT mode, you can also control that TV's volume when you are in VCR mode.

Before you start, press  to select VCR.

- ① Press and hold  and  at the same time until the green LED lights up (about 3 seconds).

- ② On the keypad, enter 993.
- ③ Press  to select SAT.
- ④ Press any key (except ). That's it!

Now, when you're in VCR mode,  (up/down) control the volume of the second (SAT) TV.

NEED HELP?

If you have questions about your remote or if you are missing certain functions on your remote, call our free-phone helpline!

Before you call, please read the manual carefully. Most questions will clear themselves. If you don't find an answer to your questions, make a note of your equipment in the table below - this makes it easier for the operators to help you quickly. Look for model numbers in the equipment instruction manual, or on the back of the equipment. Be in front of the equipment, this way our operators can help you verify the functionality of your remote.

In the UK. call 0800 968 118. In Ireland, call 1 800 553 136.

The model number of your Philips universal remote control is:

SBC RU430

Date of purchase:

___/___/___

Day/month/year

Equipment	Brand	Model nr.	Used code
TV			
VCR			
SAT			

As you add new components to your home entertainment system, Philips again offers a universal remote control that will fit your new needs. Look for below unique full range of universal remote controls from Philips at a retailer near you.

- RU 110* : Universal easy TV zapper
- RU 410* : 1 in 1 Universal TV Remote with digits and TXT
- RU 422* : 2 in 1 Universal Remote Control for TV and VCR
- RU 440* : 4 in 1 Universal Remote Control for TV, VCR, SAT/Cable and AUX for audio
- RU 455* : 4 in 1 Universal Remote Control for TV, VCR, SAT/Cable and AUX for second device
- RU 460* : 6 in 1 Universal Remote Control- Pre-programmed and Learnable

Another very nice product from Philips is the Philips SBC LI510 Remote Control Extender Set, the wireless extension of your infra-red (IR) remote control! This system allows you to operate every IR driven equipment (i.e. Sat-receivers, VCRs or Hi-Fi-sets) from anywhere in or around the house.

A		Cimline	036
Acura	036	Clarivox	064
Admiral	114, 190	Clatronic	397, 274
Adyson	244	Clayton	412
AGB	543	Condor	397, 347
Akai	235, 388	Contec	243, 036
Akura	245, 396	Continental Edison	223, 360, 426
Alba	064, 245, 398, 036, 262	Crosley	114
Allorga	321	Crown	064, 397, 445, 036, 606
Amplivision	244, 427	Crystal	458
Amstrad	398, 036, 381, 389, 396, 439, 460, 543	CS Electronics	243
Anitech	036	CTC	274
Arcam	243, 244	Cybertron	245
ASA	114	D	
Asuka	245	Daewoo	064, 401, 036, 526
Atlantic	233	Dainichi	245, 242
Audiosonic	064, 136	Dansai	064
Autovox	233, 114, 363	Dayton	036
B		De Graaf	235, 575
Baird	370, 584	Decca	064, 099, 543
Bang & Olufsen	114	Dixi	064, 036
Barco	407	Doric	033
Basic Line	245, 036	Dual	363, 379, 546
Baur	064, 037, 092, 376, 388, 532, 539, 562	Dual Tec	244
Beko	397, 513	Dumont	097, 114
Beon	064	E	
Binatone	244	Elbe	286
Blaupunkt	218, 222, 227, 354, 355, 562	Elin	064, 575
Blue Sky	245	Elite	245, 347
Blue Star	309	Elta	036
Bondstec	274	Emerson	114, 388
Boots	244	Erres	064, 039
BPL	309	Europhon	543
Brandt	136, 223, 360, 362	Expert	233
Brionvega	114	F	
Britannia	243	Ferguson	064, 136, 220, 265, 314, 362, 370
Bruns	114	Fidelity	243, 220, 388
BSR	321	Finlandia	235, 373, 386
BTC	245	Finlux	064, 099, 097, 114, 132, 373, 438, 543
Bush	064, 245, 401, 398, 321, 036, 309, 376, 382, 546	Firstline	243, 244, 321, 036, 348, 274
C		Fisher	397, 244, 235, 330
Cascade	036	Flint	482
Cathay	064	Forgestone	220
Centurion	064	Formenti	064, 347, 092, 114
Century	114	Frontech	291, 458, 475, 190, 274
CGE	274, 333	Fujitsu	099, 233

Funai.....321, 291, 330

G

GEC.....064, 244, 099, 543, 584

Geloso.....036

Genexxa.....245, 190

GoldStar.....064, 244, 136, 317

Goodmans.....064, 244, 401, 398,
.....099, 262, 344, 370, 526

Gorenje.....397

GPM.....245

Graetz.....190, 388, 584

Granada.....064, 244, 099, 235,
.....366, 386, 543

Grandin.....309

Grundig.....097, 218, 222, 514, 562

H

Hanseatic.....064, 347, 388

Hantarex.....543

HCM.....036, 309, 439

Hinari.....064, 245, 036

Hisawa.....309, 482, 427

Hitachi.....244, 136, 071,
.....132, 190, 223, 252,
.....333, 376, 575, 584

Huanyu.....243, 401

Hypson.....064, 309, 291

I

ICE.....244, 291, 398

Imperial.....397, 445, 274

Indiana.....064

Ingelen.....190, 584

Inno Hit.....099, 543

Interfunk.....064, 190, 274,
.....388, 539, 584

Intervision.....244, 291, 129

Isukai.....245

ITS.....398

ITT.....034, 190, 388, 575, 584

J

JVC.....398, 080, 121

K

Kaisui.....243, 244, 245, 036, 309

Kapsch.....233, 190, 584

Kathrein.....583

Kendo.....064, 262, 389

Kingsley.....243

Kneissel.....286, 462

Korpel.....064

Korting.....114

Koyoda.....036

L

Leyco.....064, 321, 099, 291

Liesenk & Tter.....064

Loewe.....114, 539

Luma.....233

Luxor.....376, 388

M

M Electronic.....064, 244, 401,
.....036, 136, 132, 190,
.....314, 373, 507

Magnadyne.....129, 114, 274, 543

Magnafon.....129, 543

Manesth.....244, 347, 291, 262

Marantz.....064

Marelli.....114

Mark.....064

Matsui.....064, 244, 398,
.....321, 036, 099, 062, 038,
.....235, 262, 381, 382, 470,
.....514, 543, 606

Mediator.....064, 039

Memorex.....036

Memphis.....364

Metz.....114, 394, 562

Minerva.....097, 514, 562

Minoka.....396, 439

Mitsubishi.....034, 114, 135,
.....177, 381, 539, 562

Mivar.....243, 317, 318, 319, 543

MTC.....376, 539

Multitech.....243, 036, 129

N

Neckermann.....064, 114, 218,
.....376, 532, 583

NEI.....064, 458, 364

Nikkai.....064, 243, 245,
.....099, 291, 062, 364

Nobliko.....129

Nokia.....388, 507, 575

Nordmende.....136, 223, 314, 370

O

Oceanic.....190, 242, 388

Onwa.....460

Orion.....064, 321, 347,
.....348, 262, 382, 543

Osaki	244, 245, 099, 291, 439262, 381, 543
Oso.....	245	Salora.....190, 376, 386, 388, 575
Osume	099, 184	Sambors.....129, 543
Otake.....	344	Samsung.....064, 397, 244, 036,
Otto Versand	064, 244, 347,291, 117, 317, 515, 583
.....	037, 218, 370, 376,	Sandra
.....	532, 539, 562, 583243
P		Sanyo.....099, 038, 184, 235, 366
Palladium	397	SBR.....064, 033, 034,
Panama.....	244, 291039, 040, 220
Panasonic	277, 153, 190,	Schaub Lorenz.....388, 584
.....	253, 394, 584	Schneider.....064, 245, 398, 040,
Pathe Cinema	243, 347, 265274, 330, 350, 363, 379, 421
Pathe Marconi.....	223, 360	SEG.....244, 291
Pausa.....	036	SEI.....321, 129, 114,
Perdio.....	347	Sei-Sinudyne.....037, 543
Philco.....	114, 274	Seleco.....233, 190, 286, 389, 438
Philips.....064, 401, 033, 034,		Sentra.....062
.....	039, 040, 114, 220,	Sharp.....120
.....	320, 350, 359, 583	Shorai.....321
Phoenix.....	114	Siarem.....129, 114, 543
Phonola.....064, 039, 040, 114, 320		Siemens.....064, 184, 218, 222,
Pioneer.....	136, 190, 314227, 354, 355, 562
Prandoni Prince.....	543	Singer.....114
Profex.....	036, 388	Sinudyne.....321, 129, 114, 262
Proline.....	348	Solavox.....190
Protech.....064, 244, 445, 036,		Sonitron.....235
.....	291, 129, 458, 274, 364	Sonoko.....064, 036
Pye.....	034, 039	Sonolor.....190, 235, 242
Q		Sontec.....064
Quelle.....064, 037, 038, 097,		Sony.....037, 038, 532
.....	227, 333, 354, 355,	Soundwave.....064, 445
.....	388, 532, 539, 562	Standard.....244, 245, 036
R		Stern.....233, 190, 286
R-Line.....	064	Sunkai.....321, 348, 382
Radiola.....064, 039, 350		Susumu.....245
Radiomarelli.....	114, 543	Sysline.....064
RBM.....	097	T
Rediffusion.....	388	Tandy.....244, 245, 099, 190
Revox.....	064	Tashiko.....244, 386
Rex.....233, 291, 190, 286		Tatung.....064, 244, 099, 543
RFT.....	114	Tec.....244, 274
Roadstar.....	245, 036, 291	Technema.....347
S		Technics.....277
Saba.....136, 114, 190, 223,		Teleavia.....360, 370
.....	314, 362, 370, 584	Telefunken.....136, 289, 333,
Saccs.....	265362, 370, 498, 525
Saisho.....036, 291, 458, 038,		Telemeister.....347

- English
- Français
- Español
- Deutsch
- Nederlands
- Italiano
- Português
- Svenska
- Suomi
- Dansk
- Ελληνικά
- Norsk

Textet243, 245
 Thomson136, 223, 314, 360,
370, 376, 426
 Thorn064, 099, 062, 220,
388, 526, 532, 539, 562, 580
 Thorn-Ferguson370
 Tomashi309
 Toshiba062, 097, 270, 580
 Triumph270, 543

U

Uher233, 347, 330
 Ultravox129
 Universum064, 397, 291, 132,
373, 448, 519, 562

V

Vestel064
 Videosat274
 Visa036, 190, 584
 Vision347
 Voxson114, 190

W

Waltham244
 Watson064, 347
 Watt Radio129
 Wega114
 White Westinghouse064, 243, 347

Y

Yoko064, 244, 291, 458

Z

Zanussi233

A

Aiwa027, 334, 375, 379
 Akai342, 133, 068, 080
 Akiba099
 Alba099, 047, 305, 236, 342, 379
 Ambassador047
 Amstrad027, 359
 Anitech099
 ASA064, 108
 Asuka064

B

Baird027, 068, 131, 134
 Basic Line099, 047, 305
 Blaupunkt061, 222, 030, 033,
181, 189, 253, 254, 430
 Brandt347, 214, 348
 Brandt Electronic068
 Bush099, 305, 236, 379

C

Catron047
 CGE027
 Cimline099
 Clatronic047
 Combitech379
 Condor047
 Crown099, 047, 305

D

Daewoo047, 305
 Dansai099
 De Graaf069, 193
 Decca027, 108
 Dual068
 Dumont027, 108, 131

E

Elcatech099
 ESC305, 26
 7

F

Ferguson347, 068, 134, 348
 Fidelity027
 Finlandia108, 131
 Finlux027, 108, 069, 131
 Firstline099, 064, 236, 072, 070
 Fisher073, 074, 081, 131
 Frontech047
 Funai027

G

GEC108
 General047
 GoldHand099
 GoldStar064, 252
 Goodmans ...099,027,047,064,305,430
 Graetz068, 131, 267
 Granada108, 073, 131
 Grandin099, 027, 064
 Grundig099, 108, 061, 374, 253,
222, 030, 033, 034, 234, 376, 430

H

Hanseatic064
 HCM099
 Hinari099, 031, 267, 379
 Hitachi027, 031, 069, 068,
193, 262, 267
 Hypson099

I

Imperial027
 Ingersol031
 Interfunk108
 ITT133, 073, 411, 068, 131, 267
 ITV064, 305

J

JVC094, 411, 035, 068, 233, 234

K

Kaisui099
 Kendo236, 133
 Kenwood068
 Korpel099

L

Lenco305
 Leyco099
 Loewe064, 031, 108, 033
 Logik031, 267
 Luxo133, 075, 073, 070, 131

M

M Electronic027
 Manesth099, 072
 Marantz108, 030, 033
 Matsui ...236, 031, 063, 115, 375, 379
 Memorex027, 064, 073, 131
 Memphis099
 Metz ...374,222,030,033,189,254,486

English
 Français
 Español
 Deutsch
 Nederlands
 Italiano
 Português
 Svenska
 Suomi
 Dansk
 Ελληνικά
 Norsk

Minerva.....	222, 033	Samsung.....	459, 267
Mitsubishi.....	108, 094, 070	Sansui.....	094, 068
Multitech.....	099, 027	Sanyo.....	073, 131
Murphy.....	027	Saville.....	379
N			
NEC.....	094, 065, 068	SBR.....	108, 173
Neckermann.....	108	Schaub Lorenz.....	027, 068, 131
Nesco.....	099	Schneider.....	099, 027, 108
Nokia.....	133, 075, 073, 068, 131, 267	SEG.....	349, 267
Nordmende.....	411, 347, 068, 324, 348	SEI.....	031, 108
O			
Oceanic.....	027, 068	Seleco.....	068
Okano.....	342, 375	Sentra.....	047
Orion.....	236, 031, 063, 115, 375, 379	Sharp.....	075
Osaki.....	099, 027, 064	Shintom.....	099, 131
Otto Versand.....	108	Shorai.....	031
P			
Palladium.....	099, 064, 033, 068	Siemens.....	064, 108, 222, 030, 033, 131, 173
Panasonic.....	253, 189, 254, 486	Silva.....	064
Pathe Cinema.....	063	Singer.....	072
Pathe Marconi.....	068	Sinudyne.....	031, 108
Pentax.....	069	Solavox.....	047
Perdio.....	027	Sontec.....	064
Philco.....	065	Sony.....	059, 060, 061, 038
Philips.....	108, 411, 173, 430, 494, 510	Sunkai.....	375
Phonola.....	108	Sunstar.....	027
Pioneer.....	108, 094, 262	Suntronic.....	027
Portland.....	047	T	
Profex.....	349	Tashiko.....	027
Profitronic.....	267	Tatung.....	027, 108, 068
Proline.....	027	Tec.....	047
Pye.....	108	Technics.....	253, 189
Q			
Quartz.....	073	Teleavia.....	068
Quelle.....	108	Telefunken.....	347, 411, 068, 214, 348
R			
Radiola.....	108	Tenosal.....	099
Rex.....	411, 068	Tensai.....	349, 027
RFT.....	430	Thomson.....	347, 411, 068
Roadstar.....	099, 064, 305, 267	Thorn.....	063, 068, 131
S			
Saba.....	347, 411, 068, 233, 234, 324, 348	Toshiba.....	108, 072, 411, 068, 070
Saisho.....	236, 031, 063, 115	Towada.....	349
Salora.....	133, 073, 070	U	
		Uher.....	267
		Universum.....	027, 064, 108, 133, 222, 033, 267
		Y	
		Yamishi.....	099
		Yokan.....	099
		Yoko.....	047, 267

A	
Akai	542
Alba	482, 448, 389, 640, 542
Aldes	315
Amstrad	
.....	107, 279, 372, 488, 536, 716
Ankaro	396, 315, 247
Anttron	448, 210
Aristona	064
Armstrong	270
AST	378
Astra	135, 566
Astro	547, 200
Axis	396
B	
Beko	216
Best	396
Blaupunkt	200
Boca	270, 540
BT	695, 542
Bush	094
C	
Cambridg.....	371, 542
Channel Master	389
Chaparral	243
CNT	547
Commlink	315
Connexions	423
Conrad	634
Crown	270
D	
DDC	389
DNT	423, 227
E	
Echostar	423
Elta	543
Emanon	448
F	
Ferguson	210, 094, 216, 363
Fidelity	279
Finlux	482, 135, 371, 424
Freecom	448, 761
Fuba	448, 396, 423, 736
G	
G-Sat	210
Galaxis	315
Gooding	598
Goodmans	216
Grundig	598, 200, 216,
.....	355, 490, 777
H	
Hinari	210
Hirschmann	529,200, 600, 424, 699
Hitachi	482
Houston	695
Huth	270, 315, 247
I	
Intervision.....	619
IRTE	636
ITT	13
J	
JVC	542
K	
Kathrein	200, 227, 119, 469,
.....	507, 531, 649, 685
Kreiselmeyer	200
Kyostar	448
L	
La Sat	547, 540, 491, 634
Lenco	448
Lennox	619
Lupus	396
Luxor	600, 135
M	
Manhattan	482, 619, 547
Marantz	227
Maspro	119, 355, 363
Matsui	371, 598
Mediamarkt	270
Micro Technology.....	566
Minerva	598
Mintec	605
Morgan's	270, 540
Multistar	491
N	
NEC	205
Neusat	719
Newhaus	247
Nikko	387, 740
Nokia	482, 600, 135, 355, 424
Nordmende	389

English

Français

Español

Deutsch

Nederlands

Italiano

Português

Svenska

Suomi

Dansk

Ελληνικά

Norsk

O
 Orbitech528
 Oxford.....371

P
 Pace482, 210, 094, 355, 363, 818
 Palladium 598
 Palsat528
 Panda482
 Philips482, 227, 319, 355, 490, 609
 Phonotrend315, 619, 815
 Promax.....482
 Prosat315

Q
 Quadral389, 655

R
 Radiola227
 Radix423
 RFT315, 247, 227, 568

S
 Saba547, 363, 736, 761
 Sabre482
 Salora135
 SAT 378, 488, 543
 Satec210, 355
 SatPartner
448, 547, 529, 719, 736, 761
 Schwaiger210, 531
 Seemann.....423, 605, 653
 SEG448, 396, 566
 Siemens200
 Skymaster315, 655
 Sony731
 Sunstar540

T
 Tantec482, 363
 TechniSat289, 528, 568, 575
 Telefunken.....448
 Teleka.....270, 640, 699
 Thomson482
 Tonna695
 Triad378

U
 Universum598, 200

V
 Ventana227
 Vortec448
 Vtech.....378

W
 Wisi482, 423, 200, 378, 665

Z
 Zehnder547

SETUP CODES FOR CABLE

B

British Telecom132

D

Decsat450

F

Filmnet470

France Telecom.....478

J

Jerrold030, 303

M

M.N.E.T470

MNet470

P

PVP Stereo Visual Matrix.....030

S

Salora409

Scientific Atlanta035, 304

T

Tele+1470

U

United Cable030

W

Westminster132

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>