


2 HEAD MONO VIDEO RECORDER

VR 171

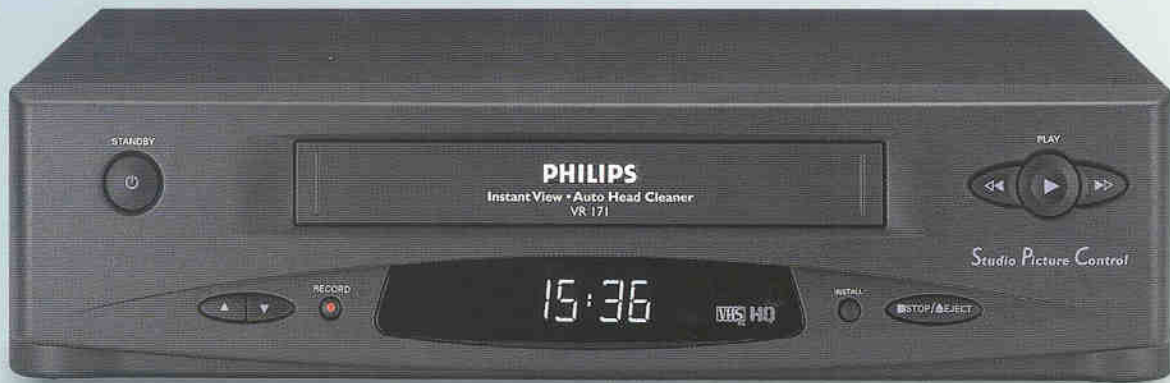

This mono video recorder combines high operating comfort with brilliant picture quality provided by Studio Picture Control and the unique laser cut video heads.

Excellent Picture Quality

- Studio Picture Control
- Studio Tracking System
- Laser Cut Video Heads
- Automatic Head Cleaner

Ease of Use

- Automatic Installation
- Instant View
- OSD (/02, /07)
- Pay-TV (/16)
- PDC (/13)



BT 172

Let's make things better.



PHILIPS

PRODUCT INFORMATION

GENERAL SPECIFICATIONS

- Mains voltage : 230 V
- Mains frequency : 50 Hz
- Power consumption oper. : 12.5 W
- Power consumption stand-by : 9.5 W
- Dim. (incl. feet) (w x d x h) : 380 x 260 x 96 mm

TV SYSTEM

- PAL-B/G, PAL/SEC BG-L (/39), PAL I (/07)
- Modulator : PAL G (PAL I - /07)
(Booster - /39)
- Software controlled modulator (not /39)

TUNING AND INSTALL

- Manual search
- Tuning system : PLL
- Autostore plus
- Number of presets : 99
- Sound system : MONO
- Channel/Frequency entry
- Backup of presets : 1 year
- Hyperband
- Cable tuner including S-Channels

TAPEDECK FUNCTIONS

- Lasered Video Heads : 2
- Eject to play : 3.7 sec.
- Stop to play : 0.4 sec.
- Full loaded Wind
- Winding time E180 : 260 sec.
- Rewinding time E180 : 170 sec.
- Head cleaner
- Cleaning mode
- Linear relative tape counter
- VISS next/previous index search
- Still
- Play : + 1
- Reverse play : - 1
- Fast : + 3, - 3
- Frame advance
- Search speed maximum : + 7, - 7

PICTURE QUALITY

- Edge Noise Canceller
- HQ+ : > 240 lines
- Studio Picture Control
- Studio Tracking
- Manual Tracking
- Assemble

PROGRAMMING

- Number of events : 6
- 'Day/Channel/Start/Stop' programming
- OTR
- Recording control system : VPS (PDC for /13)
- Backup of clock : 30 min.
- Backup of calendar : 30 min.
- Backup of timer events : 30 min.
- Automatic transmitter identification

DISPLAY

- FTD-alphanumeric display
- Number of alphanumeric characters: 4

AUDIO

- Audio : MONO

OSD for /02 and /07

- OSD
- Number of languages on OSD : 7

AUTOFUNCTIONS

- Auto rewind at tape end : after play
- Auto eject at tape end : after record

CONNECTORS

- Antenna connector
- Number of SCART connectors : 1 (2 for /16 and /39)
- SCART 1 : standard spec.
- Mains connector

REMOTE CONTROL

- IR Remote : RT 172
- Strokenumber of Remote : 101

ACCESSORIES

- Mains cable
- Batteries for remote
- Antenna cable
- Instruction manual
- Final status Language : GB
- RAM cleared

PACKAGE

- Droptest : 60 cm
- Environment-Packing



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>