




LINK ELECTRONICS, INC.

ANALOG WHITE CLIP VIDEO DA 1 X 8

DigiFlex 1151

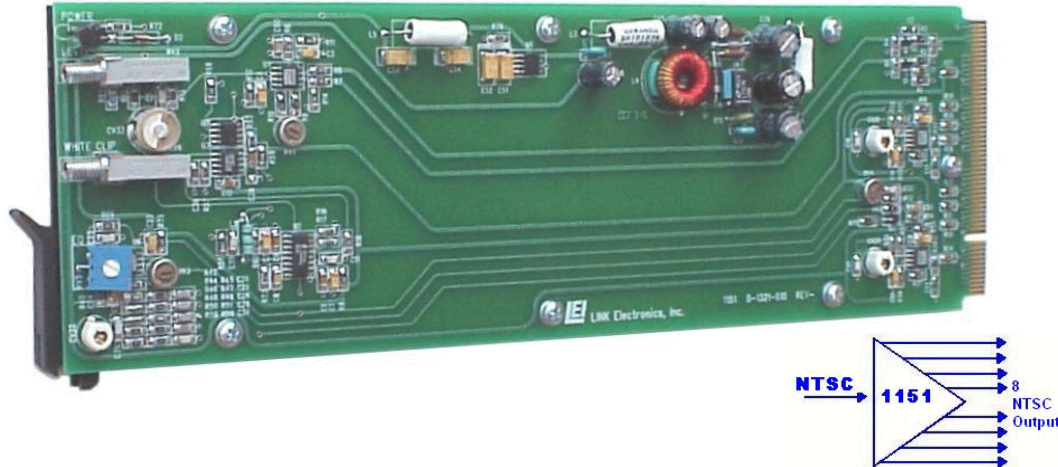

FEATURES

- ◆ White Clip
- ◆ Op Amp. Technology
- ◆ Eight Outputs, 7 Looping
- ◆ DC Coupled
- ◆ $\pm 3\text{dB}$ Gain
- ◆ 100 MHz Bandwidth
- ◆ Diff. Gain and Phase 0.1

The DigiFlex 1151 is a state-of-the-art analog video distribution amplifier with cable equalization and white clip. The 1151 provides high-performance analog video distribution in the LINK DigiFlex 1000 Frame. The advantage is obvious: both analog and digital distribution amplifiers can operate side-by-side in a single frame!

Utilizing the latest CMF Op-Amp technology, the 1151 combines wide bandwidth, low noise, and low power consumption. The video path is truly transparent, with differential phase and gain errors of $<0.1^\circ$ and $<0.1\%$, respectively. Video signal-to-noise ratio exceeds 65dB. Frequency response is exceptionally flat beyond 40MHz and features a gentle roll-off to -3dB at 100MHz—perfect for analog HDTV. Eight outputs are provided on it's companion rear cell, 1011. The 1011 has only 7 outputs if the input is specified looping.

Mounting Frame Options

- 1000 - Single Power Supply, Holds 11 Modules
- 1000/2 - Dual Power Supply, Holds 10 Modules
- 7200 - Mounting Frame, Holds 1 Module

DC-coupled differential input is a standard feature, providing high common-mode rejection. Cable equalization is adjustable from the front card edge and can compensate for loss in coax cable up to 1000 feet of Belden 8281. Clamp is referenced to back porch. White clip is adjustable from the front card edge with a range of 100 IRE units ± 30 IRE units.

The attention to detail in the design of the 1151 extends to the power supply, which features a simple switching regulator. While slightly more complex than a linear supply, this offers the highest possible efficiency. In addition, this unit is backed by a ten-year warranty including parts and labor

Two convenient mounting frames are available for the DigiFlex series products, 1000 and 7200.

LINK ELECTRONICS, INC. ◆ 2137 Rust Avenue ◆ Cape Girardeau, MO 63703-7668

Phone 573 334 4433 ◆ FAX 573 334 9255

DIGIFLEX 1151

White Clip Video Distribution Amplifier

INPUT:

Video Level: 1.0 Vp-p±3dB
 Impedance: 75 ohms , bridging
 Common Mode Range: 5Vp-p
 Maximum DC In: ±5 VDC
 CMRR: 70dB
 Return Loss, Non Looping Input: >45dB @ 5 MHz
 Return Loss, Looping Input: >35dB @ 5 MHz

OUTPUTS:

Number: Eight (8), BNC; option 7 outputs with looping
 Level: Unity Gain ±3dB

AMPLIFIER PERFORMANCE:

Frequency Response: ±0.5dB to 55 MHz
 ±1dB to 60MHz
 3.0dB to 100 MHz
 Differential Gain: <0.1%, 10% to 90% APL
 Differential Phase: <0.1°, 10% to 90% APL
 Clamping Action: 40dB for 10% to 90% APL
 6dB @60Hz
 DC Gain Stability: 0.2%
 Signal-to-Noise: >65dB
 Hum: >70dB, below 1.0V p-p
 Output Isolation: > 45dB at 3.58 MHz
 Return Loss: 50dB to 5 MHz
 Tilt: <0.4%
 Ringing: <0.4%
 High Freq. Overshoot: <0.4%
 Coupling: DC Servo, Average DC output =0
 Harmonic Distortion: SC @ 3.58Hz, 2Vp-p
 Less than 0.4% (48dB)

FRONT CONTROLS:

Gain Control: ±3dB continuous from unity
 White Clip: 100 IRE ±30 IRE Units
 Cable Equalizer: Equalizes up to 1000 Ft

ENVIRONMENTAL:

Temperature: 0° to 50° C, ambient
 Humidity: 10% to 90% non-condensing

POWER:

DC Voltages:
 +5 VDC: 50mA
 -5 VDC: 50mA

MECHANICAL:

Height: 3.5 inches
 Width : 1 Inch
 Depth: 10 Inches
 Weight: 7.1 Ounces
 Mounting: Mounts in 1000 or 7200



LINK ELECTRONICS, INC.

2137 Rust Avenue
 Cape Girardeau, MO 63703
 Phone: 573 334 4433
 FAX: 573 334 9255

PROFESSIONAL SERIES--

modular television system products--by LINK

REARCELL 1011
T151101002

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>