



3-Channel Stereo Sound Mixer

Quick Start Guide

Your 3-Channel Stereo Sound Mixer is perfect for mixing sound from multiple audio sources, such as microphones, tuners, CD players, or turntables. You can adjust each audio source's sound level for the best mix to play through your sound system, or for recording. This mixer is ruggedly constructed for home or professional use.

TALK OVER ON/OFF — lower audio input volume, so you can talk over it using the microphone.

LEFT CHANNEL/RIGHT CHANNEL — tailor sound output to your preference by cutting or boosting the frequency by $\pm 12\text{dB}$.

CUE — select a channel to monitor and prepare for mixing when wearing headphones.

PHONO 1/LINE 1, PHONO 2/LINE 2, LINE 3/LINE 4 — set to the desired input sources to play.

MONO/STEREO — set the sound output to stereo or monaural.

MIC — connect a low impedance microphone with an XLR plug here.

MIC TREBLE — adjust the microphone's treble.

MIC BASS — adjust the microphone's bass.

ASSIGN A/ASSIGN B — select an input source (channel) for A and B when using cross fader. Turn to **OFF** to disable the cross fader.

12V/3W MAX LAMP — connect a lamp to light up the mixer's controls.

POWER — turn the mixer on and off.

EQ — turn the equalizer on and off.


CUE LEVEL — adjust the headphone's volume.

PHONES — connect a pair of stereo headphones with a $\frac{1}{4}$ -inch plug.

CROSS FADER — mix sound output between two sources (A and B). To equally mix two sources, slide this control to the middle (5).


CUE/PGM — balance output play volume with the input being prepared for mixing when wearing headphones.

DJ MIC, CH1, CH2, CH3, MASTER — adjust the volume of the selected input. The illuminated controls help you to see in low light conditions.

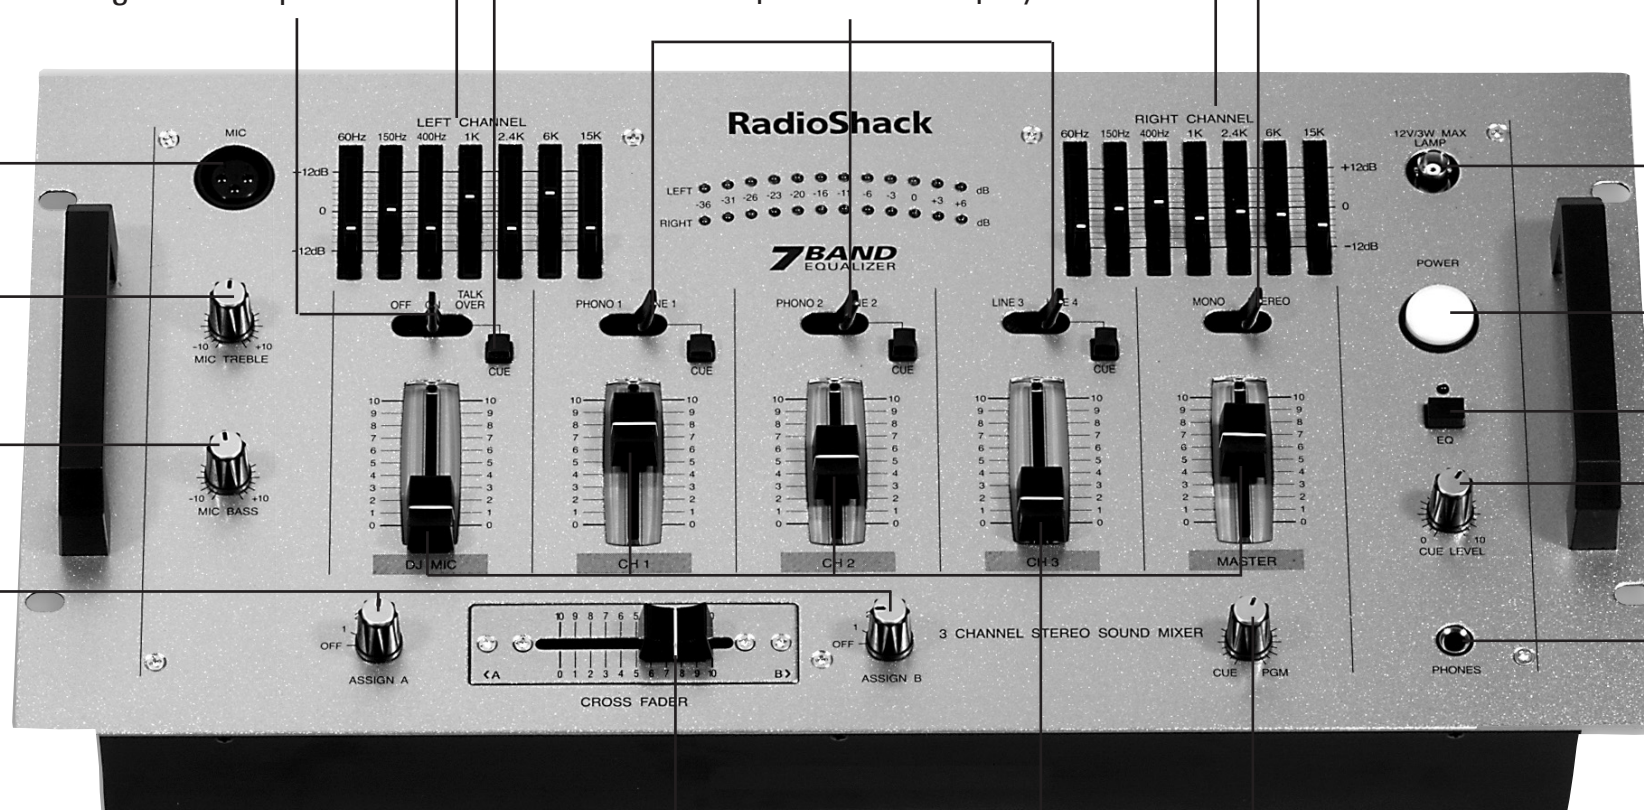

connections

Make sure you connect the mixer's left (white) and right (red) jacks to your sources' matching left (white) and right (red) jacks. See your user's guide for complete instructions on making connections.

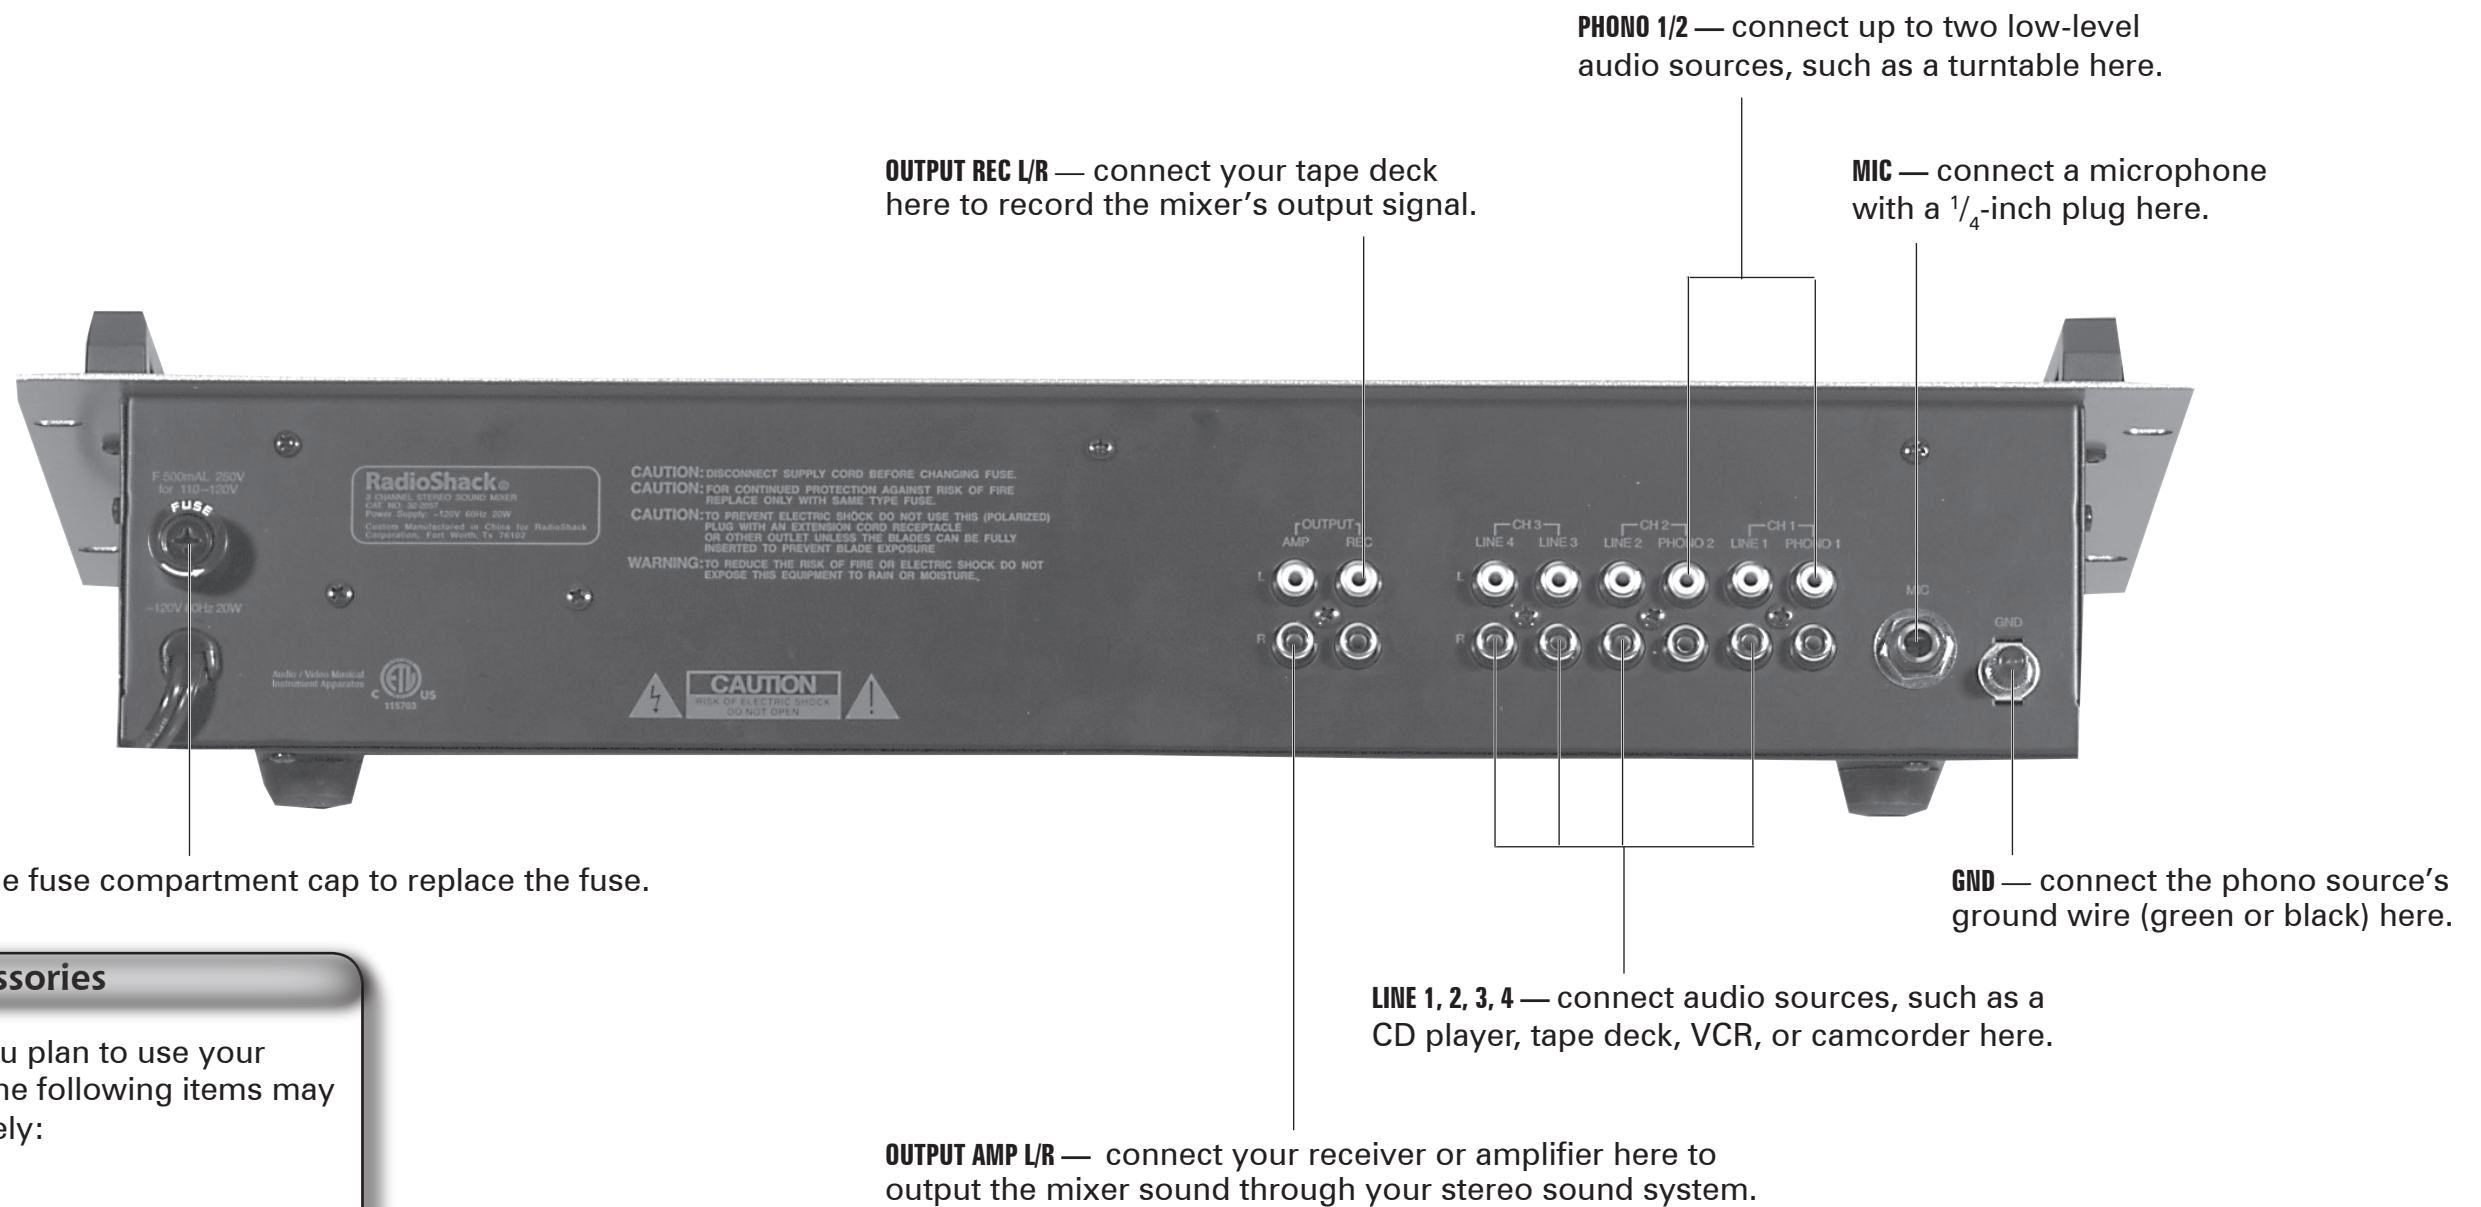

Remove the fuse compartment cap to replace the fuse.

accessories

Depending on how you plan to use your mixer, some or all of the following items may be purchased separately:

- audio patch cord
- microphone with an XLR plug
- microphone with 1/4-inch plug
- stereo headphones
- 12V lamp bulb



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>