

# ENFORCER®

## AC/DC Power Supply for CCTV Cameras


### EVP-124M6-P16

8 Outputs, 3 Amps @ 12VDC\*, and

8 Outputs, 3 Amps @ 24VAC\*.

\* Max total continuous output current, each channel output is fused at 1.1 Amp.

The EVP-124M6-P16 Dual-Output Power Supply provides both 12VDC and 24VAC outputs in one unit where a combination of both AC & DC outputs are needed. It will simultaneously provide 3 Amps to eight 12VDC outputs and 3 Amps to eight 24VAC outputs.

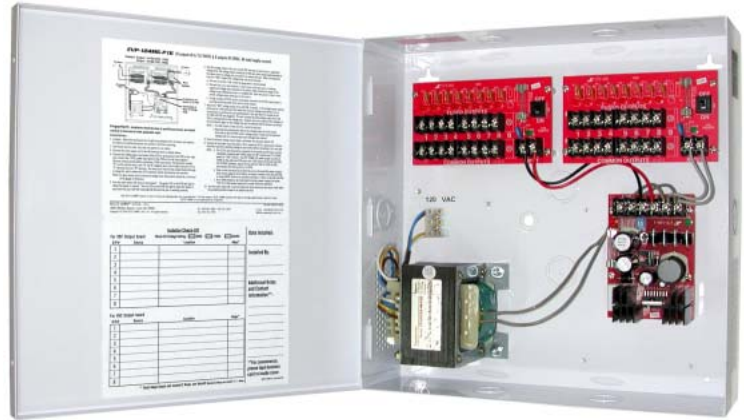

#### FEATURES:

- DC Output voltage adjustable with potentiometer to compensate for voltage drop (12.0 ~ 15.1VDC).
- Each output individually fused (PTC\*\* -type fuses).
- Output fuses rated 1.1 Amps @ 250VAC.
- Individual red status indicator LED for each output.
- Main power switches to turn on/off power to outputs.

#### POWER:

- 120VAC or 220VAC. 60Hz.
- UL-approved power transformer.
- Max total continuous output current:  
3.0 Amps @ 12VDC  
3.0 Amps @ 24VAC
- Main fuse rated 5.0 Amps @ 250VAC.
- Spare fuse included.
- 6-foot power cord included.

#### ENCLOSURE:

- Heavy-duty steel case to protect the power connections.
- Removable steel cover for easy access to power connections.
- Ventilation holes to prevent heat build-up.
- Dimensions - 12" x 12" x 3 1/2".
- Knock-out on the cover for optional cam lock.
- AC terminal block for easy connection from transformer to 6-foot power cord.


\*\* Positive Temperature Coefficient

#### OUTSTANDING FEATURES:

**EVA-F5521-3** – Optional power cord. For easy connection of dome or bullet camera to power supply.



#### CONNECTIONS:

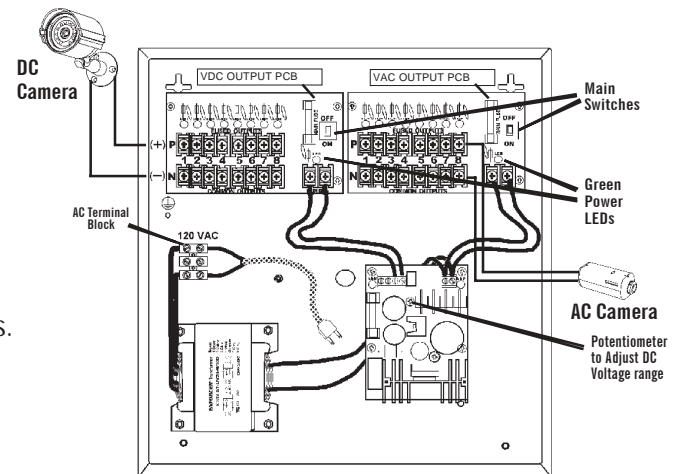

#### SPECIFICATIONS:

	24VAC	12 VDC
Number of Outputs	8	8
Total Output Current	3 Amps*	3 Amps*
Main Fuse Rating	5.0 Amps @ 250VAC	
Output Fuse Rating	1.1 Amps @ 250VAC	

\* Max total continuous output current. (1.5A for 24VDC) Output is 1.1 Amp max per output channel.

AC\_DC\_PowerSupply.pmd

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

**SECO-LARM® U.S.A., Inc.,**

16842 Millikan Avenue, Irvine, CA 92606

Tel: 1-800-662-0800 (Domestic U.S. & Canada)

Tel: 1-949-261-2999 (California & International)

Fax: 1-949-261-7326

Email: info@seco-larm.com

Website: www.seco-larm.com

Download from [www.Somanuals.com](http://www.Somanuals.com). All Manuals Search And Download.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>