

Fire Brigade Key Box Accessories

- **Frames for flush mounting or for installation into stainless steel columns**
- **Various inner doors and accessories for different locks**
- **Protective cover for installation on outside facades**
- **Power supply for heating of the outer door**



Flush Mounting Frame EZ700-2

The Flush Mounting Frame EZ700-2 is used for the easy flush mounting of the Fire Brigade Key Boxes FSK700-2 and FSK700-2SX. When the building is structurally complete, the flush mounting frame is embedded in a wall and then the facade is completed. Afterwards, the fire brigade key box can be inserted into the flush mounting frame and it can be screwed on firmly by means of the two bolts. Later on, disassembly is possible in the same way.



Specifications

Dimensions W x H x D	275 x 245 x 160 (mm)
Weight	3.3kg
Order number	265751
Order name	Flush Mounting Frame EZ700-2

Building Safety. Building Security.

LST

Flush Mounting Frame with Drilling Protection EZBS700-2

The Flush Mounting Frame EZBS700-2 serves for the installation of the Fire Brigade Key Boxes FSK700-2 and FSK700-2SX. The integrated all-round drilling protection allows for installation according to the Guideline VdS 2350 in the following ways:

- Flush mounting: When the building is structurally complete, the flush mounting frame is embedded in a wall, and after completion of the facade the fire brigade key box is screwed on the frame.
- Installation into a hollow stainless steel column without concrete filling
- Mounting on buildings in light-weight construction, on heat-insulating facades or on any walls that are not strong enough to provide sufficient protection against sabotage.



Specifications

Dimensions W x H x D	275 x 245 x 160 (mm)
Weight	3.5kg
Approval	VdS G106058
Order number	265818
Order name	Flush Mounting Frame with Drilling Protection EZBS700-2

Protective Cover WSD-FSK

The Protective Cover WSD-FSK is made of stainless steel and provides the Fire Brigade Key Box FSK700-2 or FSK700-2SX with additional protection against moisture in the area of the outer door, when rainwater hits this area from above or at the side.

The protective cover is placed behind the blind frame of the fire brigade key box from above.



Specifications

Dimensions W x H x D	287 x 267 x 55 (mm)
Weight	500g
Order number	249650
Order name	Protective Cover for FSK700-2/2SX WSD-FSK

Building Safety. Building Security.



Inner doors and accessories


Depending on which lock has been determined by the responsible fire brigade, different inner doors are available, which allow to accommodate the respective locks.

The Inner Doors ITA-2 and ITA-3 are equipped with a lock for the use of a 7-pin profile half cylinder.

The Inner Door ITB-2 can accommodate the double-bit locks type 2 and type 2005.

The Inner Door ITF-2 can hold the double-bit lock type 70091/92.

The Auxiliary Cylinder PHZ700-2 can be installed into the fire brigade key box instead of the profile half cylinder for the building key. In this case, one or more building keys are attached by means of a chain link.

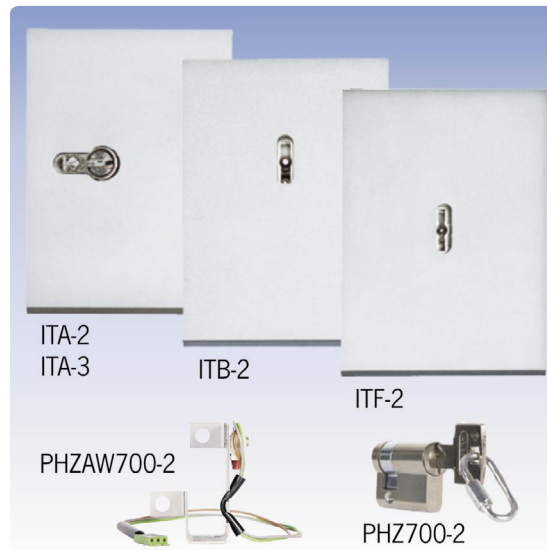

By means of the Mounting Bracket for Profile Half Cylinder PHZAW700-2, a Fire Brigade Key Box FSK700-2SX

can be easily upgraded from a two-key model to a version for three or four building keys.

Specifications

Inner door for profile half cylinder 30.5mm

Dimensions W x H x D	108 x 150 x 5 (mm)
Weight	500g
Order number	265752
Order name	Inner Door for Profile Half Cylinder 30.5mm ITA-2

Inner door for profile half cylinder 35.5mm

Dimensions W x H x D	108 x 150 x 5 (mm)
Weight	500g
Order number	265748
Order name	Inner Door for Profile Half Cylinder 35.5mm ITA-3

Inner door for double-bit lock type 2/2005

Dimensions W x H x D	108 x 150 x 5 (mm)
Weight	400g
Order number	265753
Order name	Inner Door for Double-bit Lock Type 2/2005 ITB-2

Inner door for double-bit lock type 70091/92

Dimensions W x H x D	108 x 150 x 5 (mm)
Weight	400g
Order number	265757
Order name	Inner Door for Double-bit Lock Type 70091/92 ITF-2

Auxiliary cylinder

Order number	265744
Order name	Auxiliary Cylinder for FSK700-2/2SX PHZ700-2

Mounting bracket for profile half cylinder

Order number	265743
Order name	Mounting Bracket for Profile Half Cylinder PHZAW700-2

Power supply for heating NT700-1

The standard equipment of the Fire Brigade Key Boxes FSK700-2 and FSK700-2SX includes a heating device, which consists of several SMD heating resistors that are placed on the drilling protection board. The heating device prevents the outer door from freezing in extreme weather conditions, and at the same time it keeps the interior of the safe dry.

The heating device of the fire brigade key box can be easily powered by the Power Supply NT700-1.

A built-in miniature circuit breaker protects the line side of the device.

The power supply is accommodated in a surface-mount housing which is also suitable for mounting on a DIN rail.



Specifications

Operating voltage	230VAC +10/-15%, 50Hz
Output voltage	24VAC
Protection class	IP30
Ambient temperature	0°C to +70°C
Dimensions W × H × D	110 × 180 × 80 (mm)
Colour	grey white
Weight	900g
Order number	237700
Order name	Power Supply for FSK Heating NT700-1

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>