

Specifications

Jig Saw


	4340T	4340CT	4340FCT	4341T	4341CT	4341FCT
Length of stroke	26 mm (1")					
Max. cutting capacities	In wood at 90° *135 mm (5-5/16")					
	In steel at 90° 10 mm (3/8")					
Continuous rating	580 W	720 W	720 W	580 W	720 W	720 W
Strokes per minute	2,800	800 – 2,800	800 – 2,800	2,800	800 – 2,800	800 – 2,800
Overall length	236 mm (9-1/4")	236 mm (9-1/4")	236 mm (9-1/4")	274 mm (10-3/4")	274 mm (10-3/4")	274 mm (10-3/4")
Net weight	2.4 kg (5.3 lbs)	2.4 kg (5.3 lbs)	2.4 kg (5.3 lbs)	2.3 kg (5.1 lbs)	2.4 kg (5.3 lbs)	2.4 kg (5.3 lbs)
Power supply cord	2.5 m (8.2 ft.)					

Specifications may differ from country to country.

*Use with optional blade (B-16L) allows cutting of up to 135-mm thickness




A world's leading manufacturer of power tools

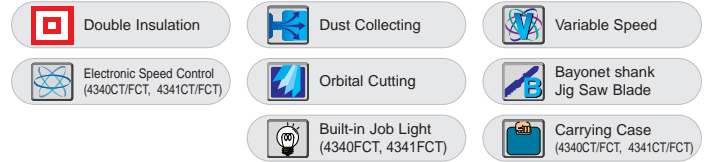

Jig Saw Series

4340T, 4340CT, 4340FCT 4341T, 4341CT, 4341FCT

Dimension

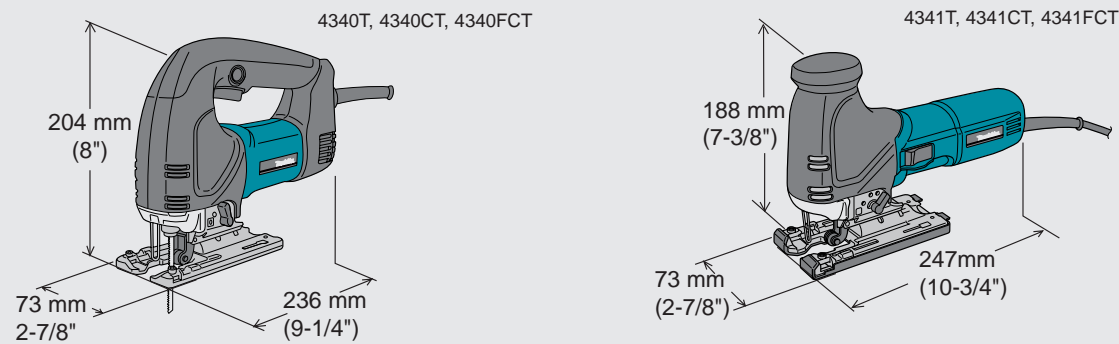

Standard equipment

Jig Saw

	Part No.
A: Jig saw blade set (including B-10: 2 pcs., BR-13: 2 pcs., B-22: 2 pcs.)	-
B: Anti-splintering device (For cleaner cuts)	192557-6
C: Cover plate	417852-6
D: Hex wrench 4	783202-0
E: Dust nozzle (Vacuum head) only for Europe	417853-4

Note: The standard equipments may differ from country to country.

Optional accessories

Jig Saw

Part No.	Description
193516-3	Guide rule set (Guide rule & circular guide set)
192108-5	Hose
No.	Part No.
58	** 792426-7
B-8	** A-85232
B-13	• B-01286
	** 792514-0
B-16	• B-01292
	** 792517-4
B-17	• B-01301
	** 792518-2

Guide rail set and Guide rail adapter set

* Packed 2 each in package
** Packed 5 each in package

Please see belows are recommended Jig Saw Blades (Packed 5 each in package)



Guide rail adapter
Part No.193517-1

Guide rail
Part No.192516-0



Makita's Newest Professional Jig Saw Series are now Launched.

NEW

Makita Corporation

3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan

PRINTED IN JAPAN Z15142-2 2002-2

Download from www.somanuals.com. All Manuals Search And Download.



A world's leading manufacturer of power tools



More Faster and More Accurate Cutting for professional.





Cutting Speed

Note: It may differ under some conditions.
Numbers in chart below are relative values when setting competitor "B's" capacity as 100.

4340T, 4340CT, 4340FCT (Top Handle Jig Saw)

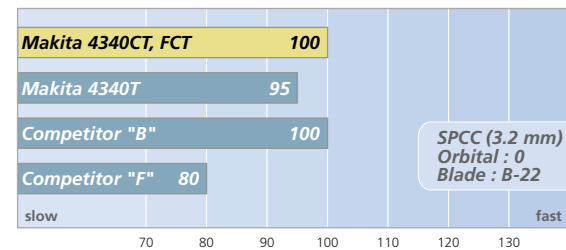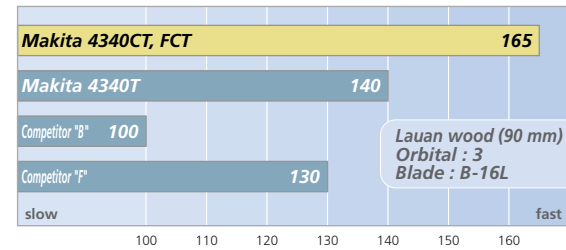

4341T, 4341CT, 4341FCT (Body Handle Jig Saw)

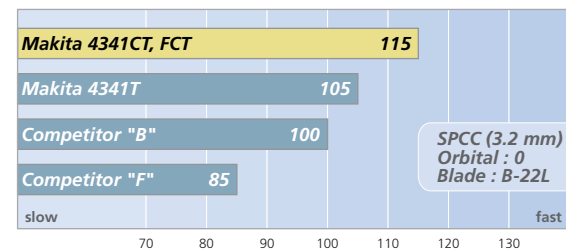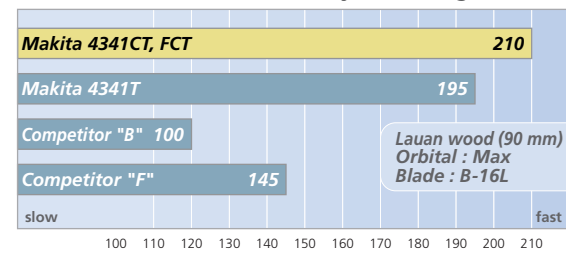

Top Handle Jig Saw Model 4340T, 4340CT, 4340FCT
Body Handle Jig Saw Model 4341T, 4341CT, 4341FCT

PHOTO: Model 4341FCT

Dust Collection

Front dust shield is not required.

7. Electronic speed control dial

Optimum cutting speed can be selected to match the various materials.

6. Cover plate

Plastic cover plate to protect materials from scratches.

5. Sawdust blowing feature

Dust blower for cleaning line of cut.

Low vibration

1. Built-in LED job light (4340FCT, 4341FCT only)

Excellent work efficiency in dimly-lit place.

2. New tool-less blade change

Push-in Lock System has made it possible to change the blade quickly.

3. High Dust-proof construction

Rubber Dust seal at Rod and Retainer shuts out the dust and protects the machine from the damage.

4. Mode change lever

Change lever to select orbit cutting action in 3 stages and straight cutting action.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>