
Trakital 6-1/2" PLUNGE CIRCULAR SAW






Close-to-wall cutting; only 11/16" away from wall

PRECISION

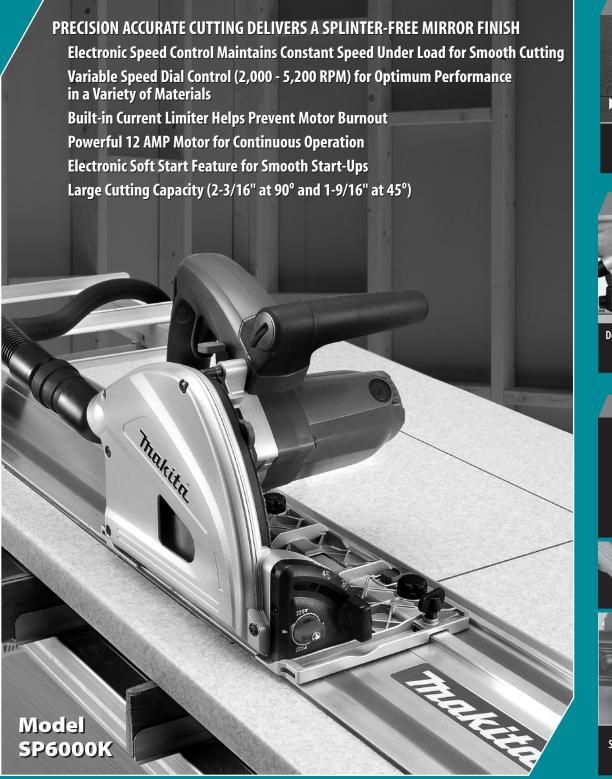

Depth stopper for splinter-free cutting enables to easily cut a preliminary groove at a depth of 1/16"

ACCURACY







Straight or bevel cutting; blade enters material on the same cutting line

PERFECT CUTTING

6-1/2" PLUNGE CIRCULAR SAW

Model SP6000K

ADDITIONAL FEATURES & BENEFITS

- Easy to set depth adjustment with large scale
- Smooth and convenient plunge release lever for operator comfort
- Bevel capability (-1° to 48°) with positive stops at 22.5° and 45°
- Magnesium components deliver a well balanced and lightweight saw at only 9.1 lbs.
- Dual front and rear bevel supports provide additional rigidity for precise and accurate bevel cuts
- Precise bevel cutting as the position of the blade enters the material on the same cutting line whether cutting straight or bevel
- Close to the wall cutting (11/16") for expanded cutting applications
- Locking lever holds the blade in position so that the wrench can be inserted through the hole in the blade case for easier blade installation
- Blade wrench attaches to the saw for fast and convenient blade changes
- Electric brake for improved productivity
- Built-in depth stop allows a preliminary cut of 1/16" to be performed before the entire material is cut through for clean and splinter-free cutting
- Rubberized handles for added comfort
- Large 1-7/16" rear dust port directs material away from the operator and easily connects to a vacuum system
- Includes a premium 48 tooth carbide-tipped blade

FEATURES WITH OPTIONAL GUIDE RAIL

- Optional guide rail system interacts with the saw base to provide smooth perfect dead-on straight or bevel cutting
- Tool-less cam adjustments on the saw base enable fine tuning to the guide rail minimizing play for more precise cutting
- Slide lever built into the saw base locks the saw to the guide rail to help support the saw while making bevel cuts
- Saw base is attachable to other guide rail systems in the market

STANDARD EQUIPMENT

- Carbide-Tipped Blade 48T (B-07353)
- Hex Blade Wrench (783203-8)
- Plastic Tool Case

SPECIFICATIONS	
Blade diameter	6-1/2"
Arbor	13/16"
Max cutting capacities: 90° 45°	2-3/16" 1-9/16"
No load speed	2,000 - 5,200 RPM
Watts out	1,300
AMPS (120V)	12
Overall length	13-3/8"
Net weight	9.1 lbs.
Shipping weight	16.2 lbs.
UPC	088381-078443



EASY BLADE CHANGES



Locking lever holds the blade in position to be replaced



Wrench is inserted through a hole in the blade case



Blade wrench attaches to the saw for convenience





Model SP6000K



OPTIONAL ACCESSORIES


■ Guide Rail: (117") (194367-7) (54") (194368-5)



Clamp Set (194385-5)



■ Guide Rule (165447-6)



Cam adjustments minimize play for precise cutting





Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com