



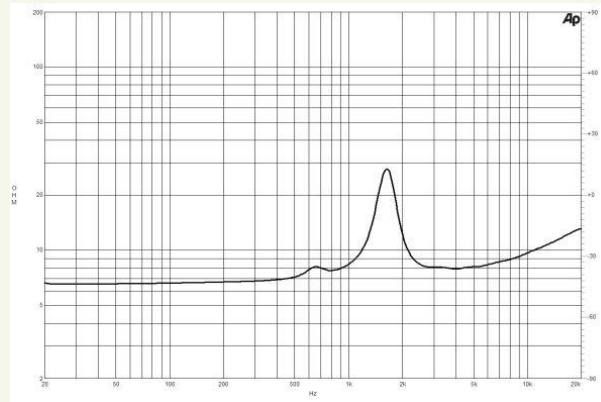

# DE12TC | HF Drivers

60 W continuous program power capacity  
 1" horn throat diameter  
 36 mm (1.4 in) aluminium voice coil  
 Titanium diaphragm  
 1500 – 18000 Hz response  
 105 dB sensitivity

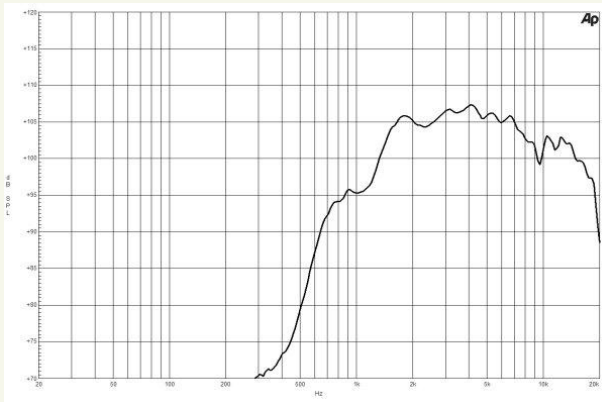

Horns  
 HF Drivers  
 Coaxials  
 LF Nd Drivers  
 LF Drivers

## Specifications

|                               |                |
|-------------------------------|----------------|
| Throat Diameter (1)           | 25 mm (1 in)   |
| Nominal Impedance (2)         | 8 ohm          |
| Minimum Impedance             | 8.1 ohm        |
| Nominal Power Handling (3)    | 30 W           |
| Continuous Power Handling (4) | 60 W           |
| Sensitivity (1W/1m) (5)       | 105 dB         |
| Frequency Range               | 1.5 -18 kHz    |
| Recommended Crossover (6)     | 2.2 kHz        |
| Voice Coil Diameter           | 36 mm (1.4 in) |
| Winding Material              | Aluminium      |
| Inductance                    | 0.14 mH        |
| Diaphragm Material            | Titanium       |
| Flux Density                  | 1.45 T         |

## Mounting and Shipping Info

|  |                                 |
|--|---------------------------------|
| Two M5 holes 180° on 76 mm (3 in) diameter |                                 |
| Overall Diameter                           | 90 mm (3.5 in)                  |
| Depth                                      | 49 mm (2 in)                    |
| Net Weight (1 unit)                        | 1 kg (2.2 lb)                   |
| Shipping Weight (8 units)                  | 8.9 kg (20 lb)                  |
| Shipping Box (8 units)                     | 220x220x150 mm (8.7x8.7x5.9 in) |

- <sup>1</sup> Driver mounted on B&C ME45 horn
- <sup>2</sup> Also available in 16 ohms, data upon request
- <sup>3</sup> 2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range . Power calculated on rated minimum impedance.
- <sup>4</sup> Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- <sup>5</sup> Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.
- <sup>6</sup> 12 dB/oct. or higher slope high-pass filter.



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>