AM₂


Two-way mid-high weatherised enclosure


features

- Compact two-way mid/high system
- Textured high-density polyurethane coating both internal and external
- Phase-ball' loaded mid-driver
- Five year limited warranty

applications

- Sports Stadia
- Arenas
- Exhibition halls

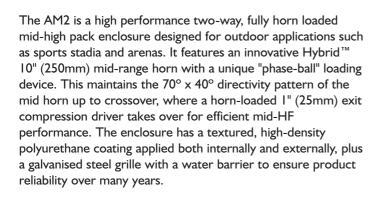

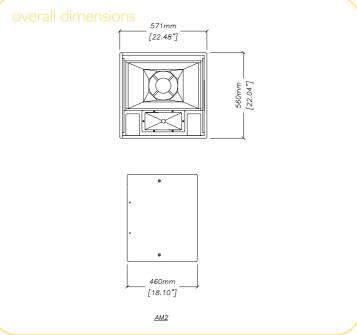



technical specifications

| TYPE | Two-way passive trapezoid Hybrid™ fully horn-loaded |
|------------------------|--|
| FREQUENCY RESPONSE (5) | 150 Hz- 18 kHz ± 3 dB |
| DRIVERS | 10" (250mm) mid driver with waterproof cone 1" (25mm) exit HF compression driver |
| RATED POWER (2) | 300W AES, I 200W peak |
| SENSITIVITY (6) | I04dB |
| MAXIMUM SPL (7) | 127dB continuous, 133dB peak |
| NOMINAL IMPEDANCE | 8 ohms |
| DISPERSION (-6dB) | 70° horizontal, 40° vertical |
| CROSSOVER | 2kHz passive |
| FINISH | Textured high-density polyurethane coating External and internal |
| PROTECTIVE GRILLE | 18 gauge punched steel, heavy galvanised and polyester-coated, with integral water barrier |
| CONNECTORS | 3m flying lead, with loop-out option |
| FITTINGS | 12 x M10 threaded inserts |
| OPTIONS | 150W line transformer (100/70V option) |
| DIMENSIONS | (W) 560mm x (H) 571mm x (D) 460mm |
| | (W) 22ins x (H) 22.5ins x (D) 18.1ins |
| WEIGHT | 38.5kg (85bs) |
| | 41kg (90lbs) with line transformer fitted |

Century Point, Halifax Road, Cressex Business Park, High Wycombe, Buckinghamshire HP12 3SL, England. Telephone: +44 (0)1494 53531 Facsimile: +44 (0)1494 438669 E-mail: info@martin-audio.com All information is Copyright © 2006 Martin Audio Ltd.



Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com