



Avaya 3641 Wireless IP Telephone

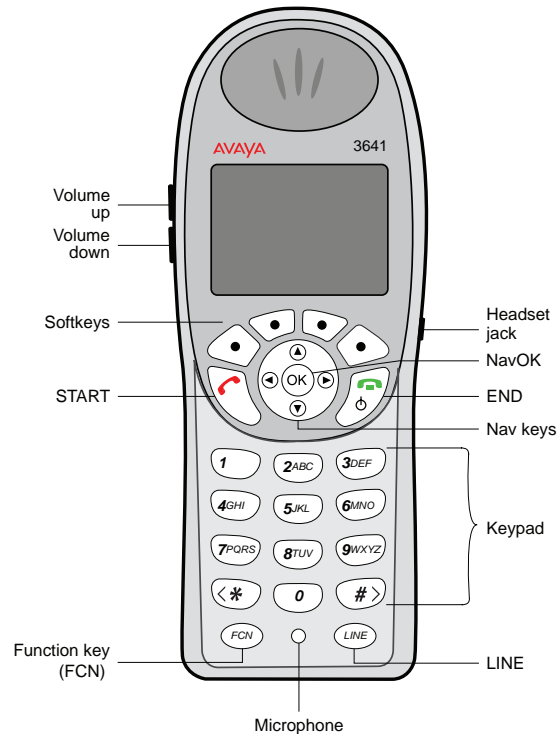

Avaya 3645 Wireless IP Telephone

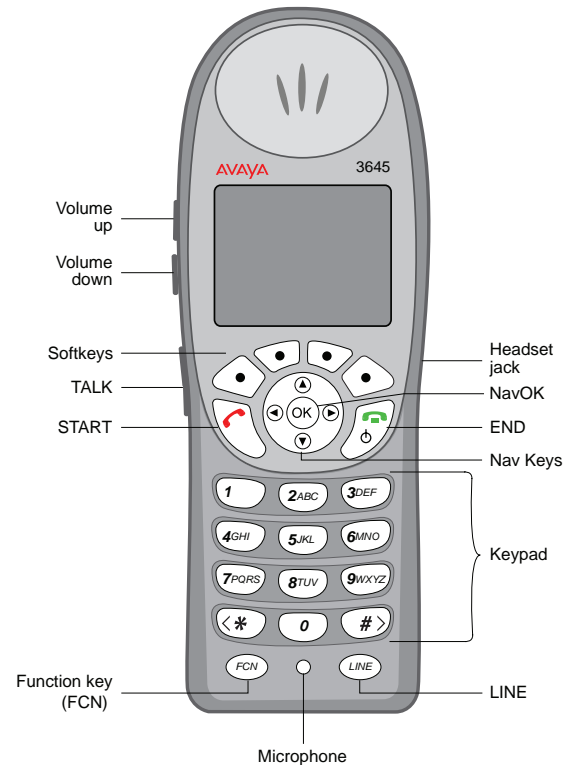

© 2007 Avaya Inc.
All Rights Reserved.

Notice

While reasonable efforts were made to ensure that the information in this document was complete and accurate at the time of printing, Avaya Inc. can assume no liability for any errors. Changes and corrections to the information in this document may be incorporated in future releases.

For full support information, please see the complete document, Avaya Support Notices for Hardware Documentation, document number 03-600759.

To locate this document on our Web site, simply go to <http://www.avaya.com/support> and search for the document number in the search box.

Documentation disclaimer

Avaya Inc. is not responsible for any modifications, additions, or deletions to the original published version of this documentation unless such modifications, additions, or deletions were performed by Avaya. Customer and/or End User agree to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation to the extent made by the Customer or End User.

Link disclaimer

Avaya Inc. is not responsible for the contents or reliability of any linked Web sites referenced elsewhere within this documentation, and Avaya does not necessarily endorse the products, services, or information described or offered within them. We cannot guarantee that these links will work all of the time and we have no control over the availability of the linked pages.

Warranty

Avaya Inc. provides a limited warranty on this product. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya's standard warranty language, as well as information regarding support for this product, while under warranty, is available through the following Web site: <http://www.avaya.com/support>.

Copyright

Except where expressly stated otherwise, the Product is protected by copyright and other laws respecting proprietary rights. Unauthorized reproduction, transfer, and/or use can be a criminal, as well as a civil, offense under the applicable law.

Avaya support

Avaya provides a telephone number for you to use to report problems or to ask questions about your product. The support telephone number is 1-800-242-2121 in the United States. For additional support telephone numbers, see the Avaya Web site: <http://www.avaya.com/support>.

AVAYA

3641/3645 Wireless IP Telephone Quick Reference Guide

21-601635
Issue 1
March 2007

Basic Handset Operation Summary

The handset's Battery Pack must be fully charged before its first use. See the User Guide for full information. Place the handset into the charger for a minimum of two hours.

If you want to Then

- Remove the Battery Pack Press down on the latch on the Battery Pack at the back of the handset and pull the Battery Pack towards you. The Battery Pack releases outward.
- Replace the Battery Pack Slide the lip of the Battery Pack into the bottom of the cavity. Push the top of the Battery Pack until it snaps into place. You should not have to force it into the handset.

Turn handset on Press and hold the **END** key until two chirps sound.

Turn handset off Press and hold the **END** key. One chirp will sound. If you are in a call, hang up first, then turn off the handset.

Unlock the keypad Press the **Unlk** softkey, then **#**, to unlock the keypad.

Lock the keypad Press the **Cfg** softkey then **NavOK**, to manually lock the keypad.

Make an internal call Press the **START** key, wait for a dial tone, then dial the extension.

Make an external call Press the **START** key, wait for a dial tone, then dial the number just as you would from your desk phone.

Select a line If multiple lines are available, your handset will default to line 1. If a different line is desired, press **LINE** and the number key corresponding to the desired line. You will hear a dial tone.

Dial a number Once you hear a dial tone, press the number keys to dial the number.

Answer a call To answer a call, press the **START** key and hold the earpiece to your ear. You may also activate the speakerphone function or use a headset.

Answer a call on a second line If you are on a call and hear subdued ringing, a call is coming in on a second line. The line number on the display will be flashing. To answer this call, put your first call on hold and press the **LINE** key, then the line number of the second call.

Answer with headset Press any key (other than **END**) to answer a call when a headset is plugged in.

Silence while ringing Press the **END** key to silence the ring.

Change the ring volume Press the up/down volume buttons on the side of the handset during ringing.

Activate or deactivate the speakerphone Press the **Spkr** softkey and speak towards the handset. Note that this feature may not be activated in your communication server.

Adjust the speaker volume Press the volume up/down buttons on the side of the handset during the call.

Adjust the headset volume Press the volume up/down buttons on the side of the handset during the call.

Place a call on hold Press the **More** softkey and then press the **Hold** softkey.

Resume a held call Press the **LINE** key followed by the line number key.

Mute the microphone Press the **More** softkey and then press the **Mute** softkey.

End the call Press the **END** key. Be sure to do this at the end of each call to return to the standby mode.

Change profile Press the **Prof** softkey in standby mode and use the **Nav** keys to select a new profile. The selected profile is marked with an asterisk (*).

Display additional features Press the **FCN** key while off hook to display additional features that have been customized for your communication server.

Turn on the backlight The backlight comes on when any key is pressed or when there is an incoming call and stays on for 10 seconds. It turns off after 10 seconds if another key is not pressed within that period.

PTT Operation Summary

The PTT feature allows the Avaya 3645 handsets to operate in a group broadcast mode, where a single handset can transmit to multiple listeners, like a two-way radio.

If you want to Then

Make a PTT call To call on the default channel, from standby mode press and hold the **TALK** button. Wait for the display to show **Transmitting** and then hold the handset approximately two inches from your mouth and speak.

Respond to a PTT call Press and hold the **TALK** button during the 10-second wait period.

End wait period Press **End**.

Select a different PTT channel Press and release the **TALK** button. Select a different channel from the list. Use the **Nav** keys or volume side buttons to highlight the desired channel. Press **TALK** to transmit.

End one PTT call and start another one Press the **END** key to exit the PTT call. Press and release the **TALK** button and select a different channel from the list. Press and hold the **TALK** button to begin transmitting on the different channel.

Receive a PTT call while in a telephone call Press the **END** key to end the telephone call. Now you can hear the PTT call.

Transmit on the priority channel Press and release the **TALK** button. Select the priority channel from the list. Press and hold **TALK**, then speak.

End a PTT call Press the **END** key to exit the PTT call.

Change PTT volume Use the **Up** and **Down** volume buttons on the side of the handset while transmitting or receiving a PTT call.

Answer a telephone call during a PTT transmission Press the **START** key. PTT transmissions will be pre-empted by the telephone call.

Start a telephone call during a PTT transmission Press the **START** key and dial the number. PTT transmissions will be pre-empted during the telephone call.

Turn off PTT Change to a different profile (Silent and Vibrate disable PTT by default) or unsubscribe from all PTT channels.

Subscribe to additional PTT channels Press **Cfg** to open the **Config Menu** and select Push-to-talk. Select **Subscribed Channels** and then select the channels you want to add. Subscribed channels are marked with an asterisk (*).

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>