



# 18 PWB 46

## Woofer

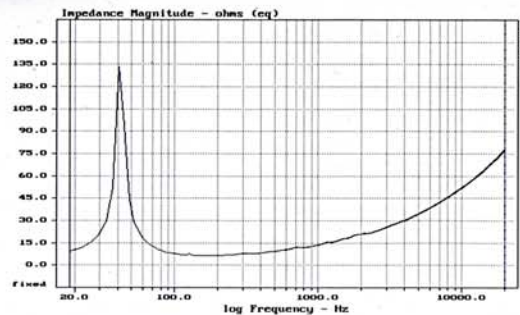

High efficiency woofer, 4" copper voice coil, 1000 watts power handling, low distortion and extremely good linearity, suitable for small cabinets and subwoofers

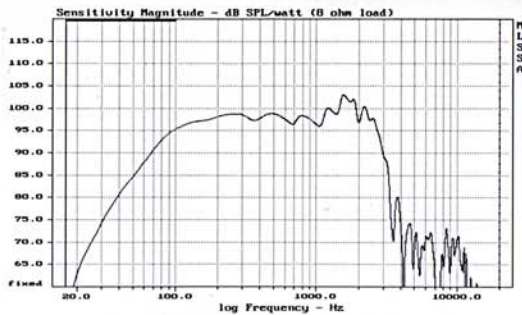

### Specifications

Nominal diameter	18" (460 mm.)
Nominal impedance	8 ohms
Pe (max)	500 watts R.M.S
Power Handling <sup>1</sup>	1000 w. cont. program
Sensitivity (1W/1m) <sup>2</sup>	99 dB.
Frequency range	43 - 1500 Hz.
Voice coil diameter	100 mm.
winding material	copper
former material	glass fibre
winding depth	17 mm.
Magnetic gap depth	8 mm.
Flux density	1.15 T

### Thiele & Small Parameters

Fs	43 Hz.
Re	5.1 ohms
Qes	0.4
Qms	12.5
Qts	0.39
Vas	156 dm. <sup>3</sup>
Sd	1134 cm. <sup>2</sup>
$\eta_0$	3 %
X max	± 5.5 mm.
Mms	153 gr.
Bl	23 Tm
Le	1.5 mH

### Mounting Informations

Overall diameter	460 mm.
Bolt circle diameter	440 mm.
Baffle cutout diameter	422 mm.
Depth	198 mm.
Net weight	13 Kg.

<sup>1</sup> AES standard

<sup>2</sup> Pink noise 100 to 1500 Hz.



18 PW 46  
Woofer



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>