



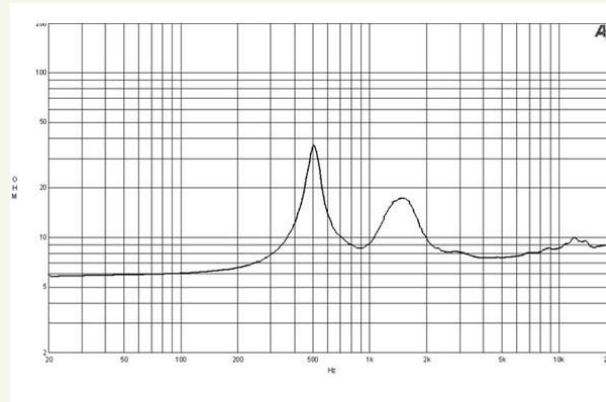

DE610 | HF Drivers

160 W continuous program power capacity
 1.4" horn throat diameter
 65 mm (2.5 in) aluminium voice coil
 Titanium diaphragm
 1000 – 18000 Hz response
 108 dB sensitivity
 Shorting copper cap for extended HF response

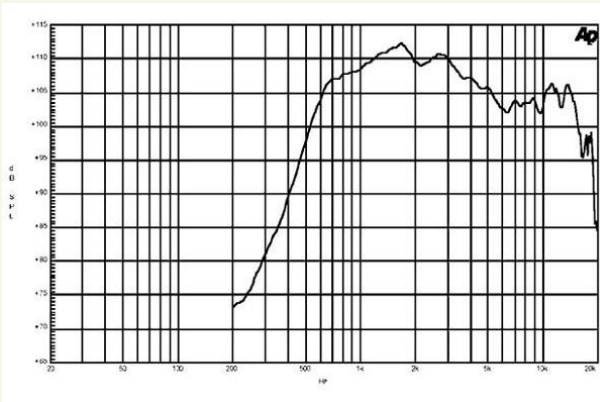

Specifications

Throat Diameter (1)	36 mm (1.4 in)
Nominal Impedance (2)	8 ohm
Minimum Impedance	7.6 ohm
Nominal Power Handling (3)	80 W
Continuous Power Handling (4)	160 W
Sensitivity (1W/1m) (5)	108 dB
Frequency Range	1 - 18 kHz
Recommended Crossover (6)	1.2 kHz
Voice Coil Diameter	65 mm (2.5 in)
Winding Material	Aluminium
Inductance	0.15 mH
Diaphragm Material	Titanium
Flux Density	1.75 T

Mounting and Shipping Info

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter	156 mm (6.1 in)
Depth	65 mm (2.5 in)
Net Weight (1 unit)	3.8 kg (8.4 lb)
Shipping Weight (2 units)	8.3 kg (18.3 lb)
Shipping Box (2 units)	210x210x190 mm (8.3x8.3x7.5 in)

- ¹ Driver mounted on B&C ME90 horn
- ² Also available in 16 ohms, data upon request
- ³ 2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range . Power calculated on rated minimum impedance.
- ⁴ Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- ⁵ Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.
- ⁶ 12 dB/oct. or higher slope high-pass filter.

LF Drivers | Coaxials | HF Drivers | Horns



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>