

Built-Under Ventilation Hood

DA 1180



Built-Under Ventilation Hood DA 1180



FEATURES

- Designed for recirculated or vented use
- Installation: Under-cabinet, wall mounting
- Maximum 400 CFM
- Removable, dishwasher-safe stainless steel filters
- Sliding control panel for light and 4 fan speed
- Integrated halogen lighting
- Stainless steel finish
- RAL color option for orders over 10 units



SPECIFICATIONS

DA 1180 — Item 28118055USA

Vented or Recirculating	Maximum 400 CFM
Dimensions	29 ¹⁵ / ₁₆ " (760 mm) W x 5" (125 mm) H x 19 ¹ / ₁₆ " (500 mm) D
Minimum distance above cooktop	Please refer to page 20 of the installation manual
Color	Available in brushed stainless steel or RAL colors (for orders over 10 units)
Electrical	
Electrical Requirements	120 V, 60 Hz, 15 Amps
Power Cord	Moled Plug 6.5 ft. (2m); NEMA 5-15
Optional Accessories	
OdorFree Charcoal Filter	DKF 18-1 OdorFree Charcoal Filter
Reducing Collar (air flow max. 400 CFM)	
Shipping	
Shipping Weight	28.4 lbs (12.9 kg)
Support	
Call	800.843.7231
20/20	☎2020technologies.com



For recirculating mode,
Recirculating Kit included.


OdorFree Charcoal Filter needs to be
purchased separately

Built-Under Ventilation Hood DA 1180




PRODUCT VIEWS

Front View

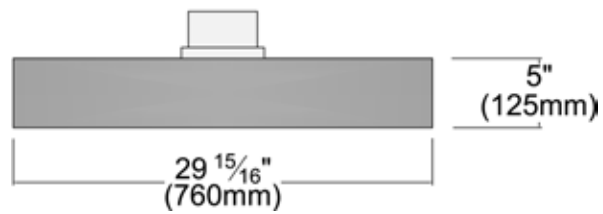

Top View

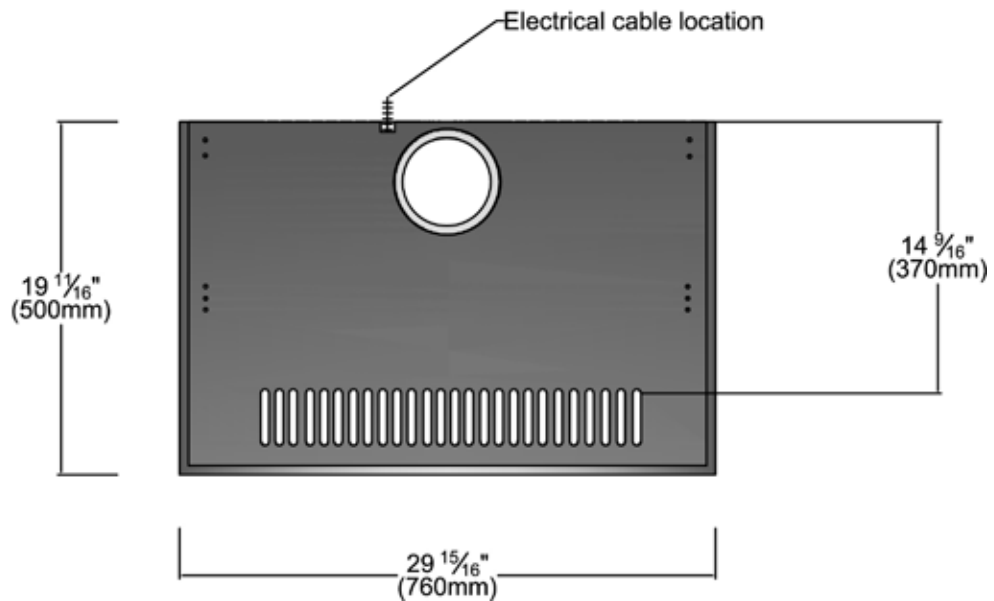


Built-Under Ventilation Hood DA 1180




PRODUCT VIEWS

Side View

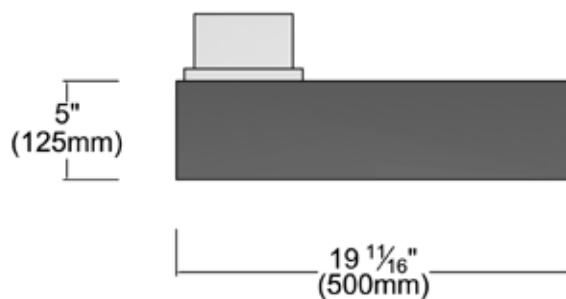

Rear View

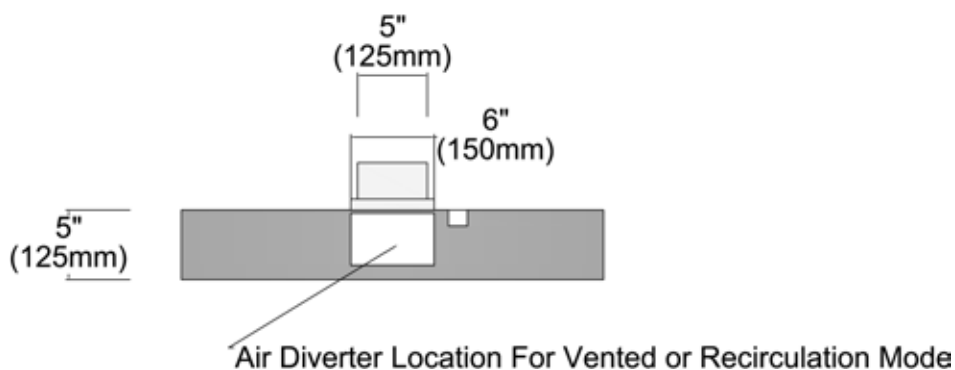

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>