



Model: XW-1200

- Polypropylene Cone W/Titanium Deposition coating
- Rubber Surround
- Dual 4 Ohm Heat Resistant Voice Coil
- Rear Vented Pole Piece
- Large Strontium Ferrite Magnet
- Rubber Magnet Cover
- For Small Sealed or Small Vented Design

Maximum Power Handling (Coils in Series) ... 1000W
 Continuous Power (Coils in Series) 500W
 SPL (Coils in Series) 89dB@ 1W/1M
 Frequency Response 20HZ~1.8KHZ
 Woofer Cone Material Polypropylene
 Woofer Magnet Ferrite
 Woofer Basket Alumina
 Woofer Surround Rubber


Sealed/Acoustic Suspension

OPTIMUM

Enclosure Airspace (Unfilled) = 1.38 ft³

Enclosure Airspace (Filled) = 1.10 ft³

F_C = 51.3 HZ

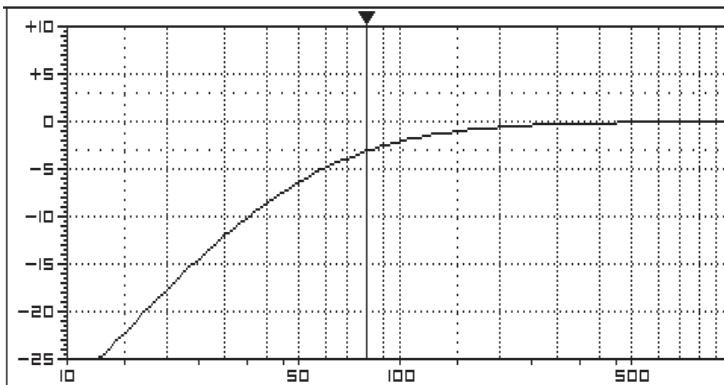

Vented/Bass Reflex


MAXIMUM FLAT

Enclosure Airspace = 2.64 ft³

F_b = 38 HZ

F₃ = 37 HZ

Port Size = 3" I.D. x 3.76" Length

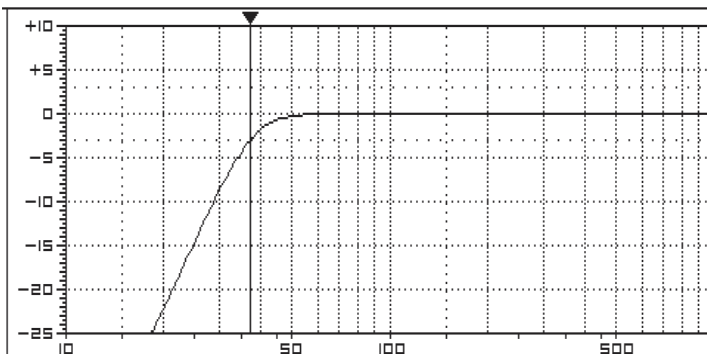

Thiele Small Parameters

Outside Dia	12"
Mounting Hole	294mm
Mounting Depth	168mm
Sensitivity	89 dB
Max. Peak Music	500W*2
Continuous Power	250W*2
Nominal Impedance	1.9 Ohm (paralleled)
Re DC Imp (± 10%)	3.7 Ohm
Le	1.15 mh@1khz
V.C. Diameter	2"
V.C. Length	30mm
Air Gap	8mm
Piston Diameter	260mm
Sd	0.0531 sqm
Vas	68.119 L (paralleled)
Fs	38.025 HZ(paralleled)
Qts	0.4058 (paralleled)
Qes	0.433 (paralleled)
Mms	114.934 g (paralleled)
Mmd	107.29 g (paralleled)
Rms	3.968 kgs-1(paralleled)
Bl	10.98 TM (paralleled)
Speaker Displacement	58.4 CM ₃ (paralleled)
Xmax	11mm
Magnet Weight	85.5 oz

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>