

## DX-PHD35 3.5" PATA Hard Drive Disk Enclosure


### Package contents

- USB 2.0 3.5" PATA hard drive enclosure
- USB 2.0 cable A-B
- AC power adapter
- Utility CD with *User Guide* and *Roxio BackOnTrack* software
- Accessories:
  - Screwdriver
  - Screws (4)
- *User Guide*
- *Quick Setup Guide*

### System requirements


- Computer with an available USB 2.0 port
  - 3.5" PATA hard drive
  - Windows 7, Windows Vista, and Windows XP operating system.
  - MAC OS X version 10.4 or higher operating system.
- For highest performance and reliability, install the latest updates and service pack (SP). For Windows, go to the **Start** menu, then select **Windows Update**.

### Features

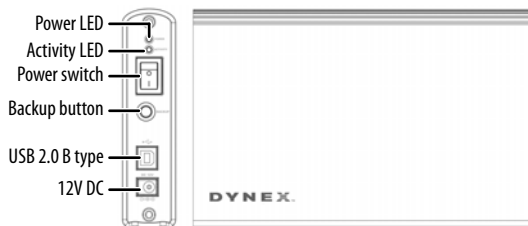


### Installing your hard drive in the enclosure


1 Remove two screws on the left side of panel.

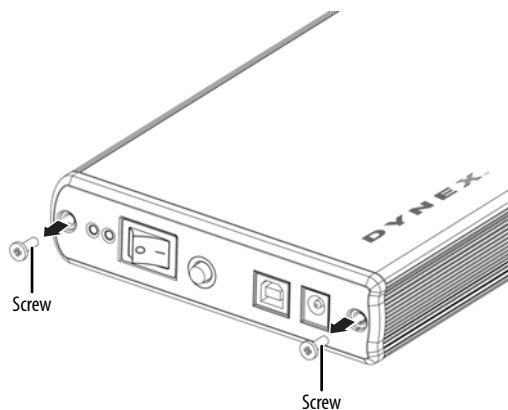


2 Pull out the plastic end cap with the circuit board.

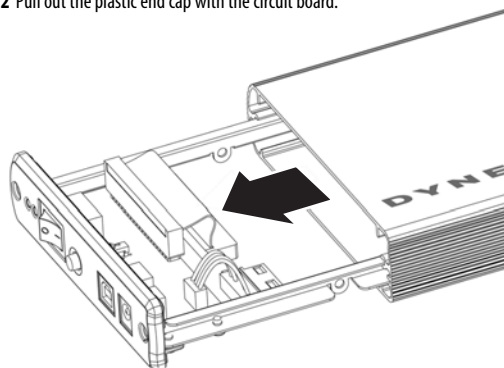

3 Connect the drive to the 40-pin data connector and to the power connector on the enclosure circuit board, then secure the drive to the rails with the four screws (provided).

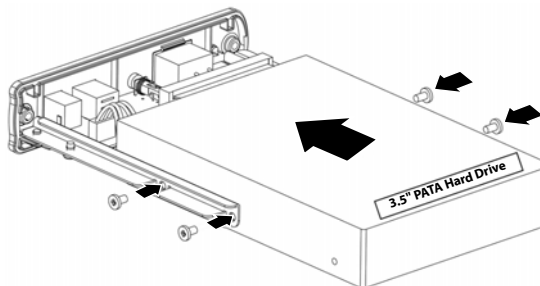

4 Place the hard drive with the plastic cap back into the aluminum housing and secure it with the two screws you previously removed.

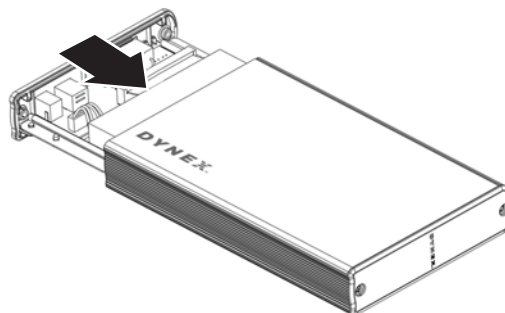

### Connecting the enclosure to your computer

**Note:** Make sure you have already installed a hard drive into the enclosure before you connect the enclosure to your computer.




- 1 Plug the AC power adapter into the 12V DC jack, then plug it into an AC power outlet.
- 2 Plug the USB B type connector into the enclosure, then plug the A type connector into one of the available USB 2.0 ports on your computer.
- 3 Press the power button to turn on the enclosure. The operating system automatically detects and sets up the new drive. The power LED turns on when the enclosure/hard drive turns on.
- 4 If the drive is correctly detected, a new drive letter is assigned.
  - For PCs, the new drive letter appears in *My Computer*.
  - For Macintosh computers, the new drive letter appears on your desktop.

**Note for Windows users:** If you do not see an additional drive in your system, you must format the new drive. See the instructions below.

**Note for Macintosh users:** If you do not see an additional drive in your system, select **Disk Utilities** from the *Utilities* folder, then select the external enclosure and format the drive to meet your requirements.

5 If the drive is new and is not formatted, follow the steps below to format the drive. Otherwise, continue to "Installing the backup software".

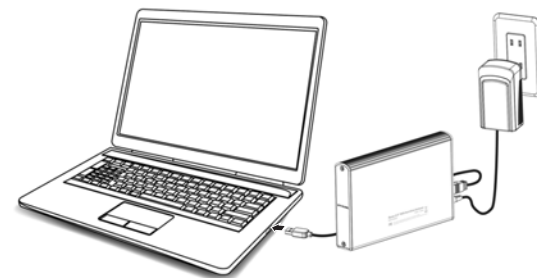

## Formatting the hard drive

### For Windows users:

- 1 Right click **My Computer** (or **Computer** depending on what version of Windows you have), then click **Manage**.
- 2 Under *Storage* on the LEFT pane, select **Disk Management**.
- 3 Click on the new drive, then click on the *Action* tab at the top of screen.
- 4 Go to *All Tasks*, then click **Format** from the menu.
- 5 Select other choices you want, then click **OK**.

### For Macintosh users:

- 1 Start the *Disk Utility* tool (under *Applications*).
- 2 Select the new hard drive you are trying to install.
- 3 Click the **Erase** tab.
- 4 Choose a volume format and assign a name to the new drive.
- 5 Click **Erase**.
- 6 Once complete, an icon for your new hard drive appears on your desktop.

## Installing the software

This Utility CD includes backup software to enable you to back up your files.

**Note:** This *Roxio BackOnTrack* software only runs on Windows 7, Windows Vista, or Windows XP computers.

**Important:** Before installing the backup software, make sure that your Windows operating system has been updated to the latest service pack.

### To install backup software:

- 1 Save all files and close all programs.
- 2 Insert the included utility CD into your optical drive. Your computer automatically detects the CD. Or, if the screen does not open, locate the CD in Windows Explorer and double-click **Run.exe** on the CD. The initial menu opens.
- 3 Click **Install Backup Software**. The *Welcome* screen opens.
- 4 Click **Next**. Then *Roxio End-User License Agreement* screen opens.
- 5 Read the license agreement, click "I accept...", then click **NEXT**. The *Choose Setup Type* screen opens.
- 6 Choose setup type, then click **Install** to start installation. It may take several minutes to install the software.
- 7 When installation is complete, the *Setup Wizard Completed* screen opens.
- 8 Click **Finish** to complete the installation.

See your *User Guide* located on the CD for information on using the software.

## Using one-touch backup

### To use one-touch backup if you have set up a backup project:

Press the *One-Touch* button on the side of the HDD enclosure. The backup process begins.

### To use one-touch backup if you have NOT set up a backup project:

- 1 Press the **One-Touch** button on the side of the HDD enclosure. The *Roxio BackOnTrack* software opens with the *Backup files* pages displayed.
- 2 Follow the on-screen instructions to set up a backup project.
- 3 After a backup project is set up, push the **One-Touch** button to backup your data.
- 4 To modify *One-Touch* backups in the future, follow the instructions for setting up backup in your *User Guide*.

## Disconnecting the enclosure from your computer

### For Windows users:

**Note:** If a drive window is open or the hard drive enclosure is active, close any associated windows before attempting to remove the enclosure.

- 1 Right-click the **Safely Remove Hardware** icon (located in the notification area of the taskbar where you usually see the time displayed.).
- 2 Select the drive you want to unplug, then click **STOP**.
- 3 When Windows notifies you that it is safe to do so, unplug the enclosure from your computer.

### To disconnect the enclosure from your Macintosh computer without shutting it down:

- 1 Drag the **USB** icon into the **TRASH**.
- 2 Unplug the enclosure.

## One-year limited warranty

For complete warranty, visit [www.dynexproducts.com](http://www.dynexproducts.com).

## Contact Dynex:

For customer service call 1-800-305-2204  
[www.dynexproducts.com](http://www.dynexproducts.com)

© 2011 BBY Solutions, Inc. All Rights Reserved.

DYNEX is a trademark of BBY Solutions, Inc. Registered in some countries. All other products and brand names are trademarks of their respective owners.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>