


LC-XC1238AP



(a) The photo and dimensions represent LC-XC1238AP

For main power supplies. Cycle long life type.

Dimensions (mm)

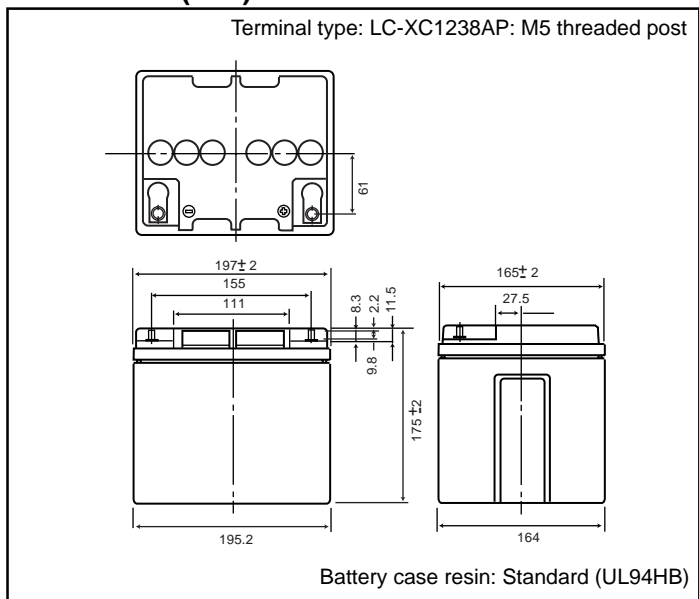

Specifications


Nominal voltage		12V
Rated capacity (20 hour rate)		38 Ah
Dimensions	Length	197 mm
	Width	165 mm
	Height	175 mm
	Total Height	175 mm
Approx. mass		15 kg

Characteristics


Capacity (note) (25°C)	20 hour rate (1.9A)	38Ah
	10 hour rate (3.6A)	36Ah
Internal resistance	5 hour rate (7.0A)	35Ah
	1 hour rate (2.3A)	23Ah
	1.5 hour rate discharge Cut-off voltage 10.5 V	20.0A
Temperature dependency of capacity (20 hour rate)	Fully charged battery (25°C)	Approx. 9 mΩ
Self discharge (25°C)	40°C	102%
	25°C	100%
	0°C	85%
Charge Method (Constant Voltage)	-15°C	65%
	Residual capacity after standing 3 months	91%
	Residual capacity after standing 6 months	82%
Cycle use	Residual capacity after standing 12 months	64%
	Initial current	15.2A or smaller
	Control voltage	14.5V to 14.9V (per 12V cell 25°C)

(Note) The above characteristics data are average values obtained within three charge/discharge cycles, not the minimum values.

Discharge characteristics (25°C) (Note)

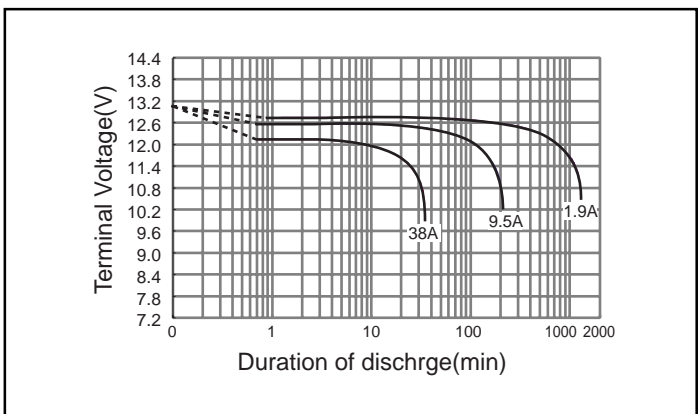

Duration of discharge vs. Discharge current (Note)

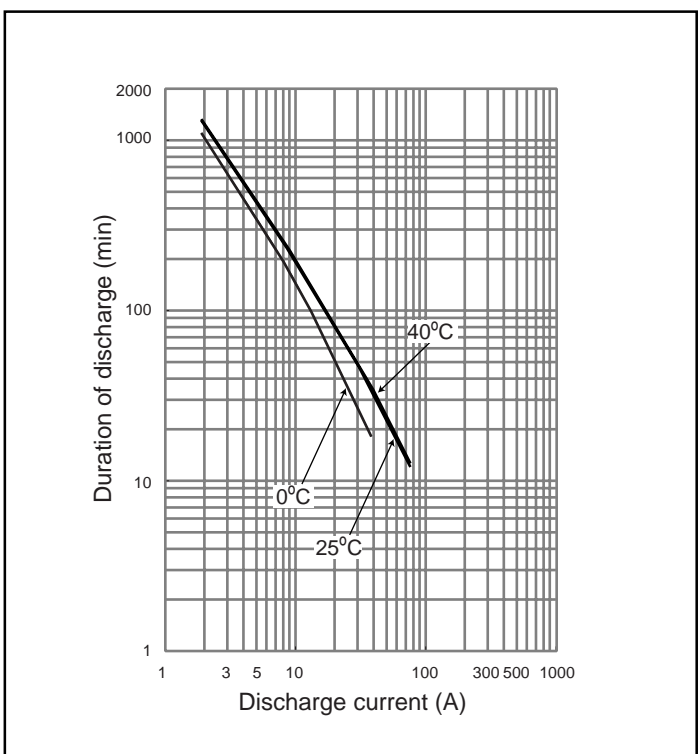

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>