

# PCC-130SW

The Crown® PCC-130SW is a surface-mounted supercardioid microphone of professional quality. This handsomely styled unit is appropriate for use on the most elegant boardroom table or lectern. Other applications include distance learning, teleconferencing, courtrooms and council chambers.

The PCC-130SW has a silent-operating membrane switch which is normally off. The switch can be configured for touch on/off, momentary on or momentary off. This configuration is set by a bottom-mounted slide switch. A high-intensity LED lights when the unit is on. The PCC-130SW is intended for multiple-microphone use on a conference table where each person wants control of his or her microphone. A ¼-inch (6.35-mm) stereo phone-plug option is available as the PCC-130SW/SPP.

The microphone attenuates 70 dB when the switch is in the off position. Since the microphone capsule is placed on a boundary or surface, direct and reflected sounds arrive at the diaphragm in-phase resulting in a wide, smooth frequency response free of phase interference. Clarity and reach are also enhanced.

Self-contained electronics eliminate the need for an in-line preamp. Powered by 12-48V phantom power, the PCC-130SW has a low-impedance balanced output which permits long cable runs without hum pickup or high-frequency loss. A 15-foot (4.6-m), two-conductor-shield microphone cable is included with a TA3F connector (mic end) and 3-pin male XLR-type connector (output). Although the standard connector on the microphone is a Switchcraft TB3M, the microphone can be special-ordered with a ¼-inch (6.35-mm) stereo phone plug on the bottom of the base plate as the PCC-130SW/SPP.

RFI suppression is included. Self-noise is low and sensitivity is very high. A bass-tilt switch allows the user to tailor the low-end response for particular applications.

## Membrane Switch

The PCC-130SW membrane switch can be configured to work three ways:

1. **Touch on/off.** Touch the switch to turn on the mic; touch it again to turn off the mic.
2. **Momentary on.** Touch and hold the switch to turn on the mic momentarily. Release the switch to turn the mic back off.
3. **Momentary off.** Touch and hold the switch to turn off the mic momentarily. Release the switch to turn the mic back on. This option serves as a cough button or privacy button.

After choosing the option you prefer, set the slide switch according to the label on the bottom of the microphone (see Fig. 5). The LED in the microphone housing will light when the mic is on.

## PHASE COHERENT CARDIOID® MICROPHONE



### Features

- Ideal for boardrooms, distance learning, teleconferencing, courtrooms, council chambers
- Mounts on a table top
- Elegant styling and small size
- Programmable membrane switch can be programmed for touch on/off, press to talk or press to mute
- LED light indicates when unit is on
- Clear, natural sound quality
- Half-supercardioid polar pattern reduces muddy-sounding room acoustics and background noise

### Specifications

**Type:** Phase Coherent Cardioid®.

**Element:** Electret condenser.

**Frequency response (typical):** 50 Hz to 20,000 Hz at 30 degrees incidence to surface (see Fig. 1).

**Polar pattern:** Half-supercardioid (supercardioid in the hemisphere above the primary boundary). See Figs. 2 and 3.

**Impedance:** 150 ohms, balanced (recommended load impedance 1000 ohms or greater).

**Open circuit sensitivity (typical):** 22 mV/Pa\* (-33 dB re 1 volt/Pa).

**Power sensitivity:** -30.5 dB re 1 mW/Pa\*. EIA rating -125 dBm.

**Equivalent noise level (self-noise):** 22 dB SPL typical (0 dB = 0.0002 dyne/cm<sup>2</sup>), A-weighted.

**S/N ratio:** 72 dB at 94 dB SPL.

**Maximum SPL:** 120 dB SPL produces 3% THD.

**Off attenuation:** 70 dB at 1 kHz.

**Turn-on time:** 250 msec.

**Turn-off time:** 125 msec.

**Polarity:** Positive pressure on the diaphragm produces positive voltage on pin 2 with respect to pin 3.

**Operating voltage:** Phantom power, 12 to 48 volts DC on pins 2 and 3 with respect to pin 1.

**Current drain:** 6 mA nominal.

**Operating temperature range:** -10° to +50° C, or +14° to +122° F.

**Connector:** Switchcraft TB3M in model PCC-130SW. Bottom-mounted ¼-inch (6.35-mm) stereo phone plug in model PCC-130SW/SPP. See Fig. 7.

**Cable:** 15-foot (4.6-m), black, two-conductor-shielded cable with Switchcraft TA3F and A3M connectors. No cable supplied with SPP option.

**Materials:** High-impact molded plastic and steel mesh grille.

**Finish:** Black.

**Net weight:** 6 oz. (170 g).

**Dimensions:** See Figs. 4 and 7.

**Optional accessories:** Crown PH-1A phantom power supply (single channel, battery or AC adapter powered).

\*1 pascal = 10 dynes/cm<sup>2</sup> = 10 microbars = 94 dB SPL.

Fig. 1

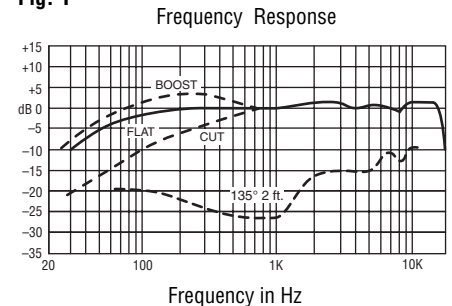


Fig. 2

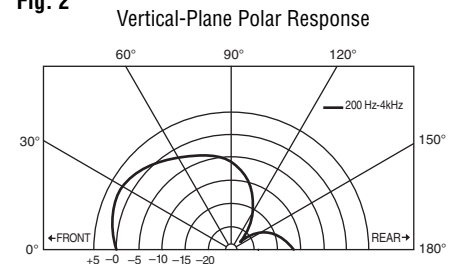


Fig. 3

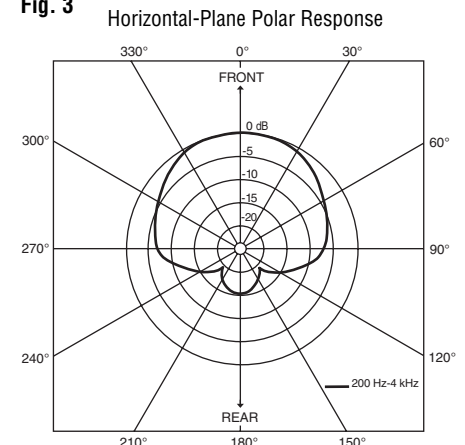




Fig. 4

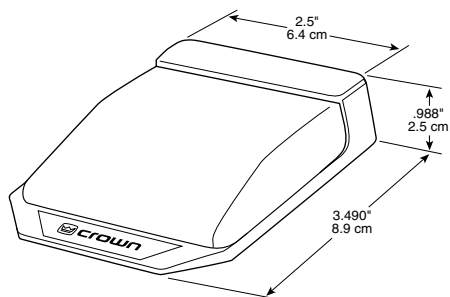


Fig. 5


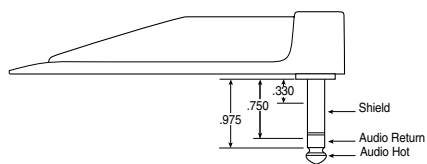


Fig. 6



### Operation

If you want to use 12 to 18 V phantom power, it should be supplied through a center-tapped transformer (such as in the Crown PH-1A phantom supply) or directly from your mixer. This will ensure 70 dB of off-attenuation.

Typical placement for each microphone is at arm's length from the user. Either place one microphone in front of each person or one between every two people. The front of the microphone is indicated by an arrow on the bottom of the base plate.

Press near the center of the switch. The microphone will switch on or off according to how you set the slide switch. When the mic is on, the LED in the housing is lit.


The PCC-130SW includes two keyhole slots in its base to accept mounting screws.

1. Punch out the keyholes marked on the label underneath the base plate (use a razor blade, small screwdriver, etc.).
2. Using the template (Fig. 6), mark the location of two holes in the table where you want to mount the mic. These holes are 1.6 inch (4.064 cm.) apart, center-to-center. They are 1.7 inch (4.318 cm) from the rear of the mic.

If your model is the SPP type install 1/4-inch (6.35-mm) phone jacks in your table. Fig. 5 shows the optimum jack wiper locations.

Fig. 7

Dimensions are to outside of plastic housing.

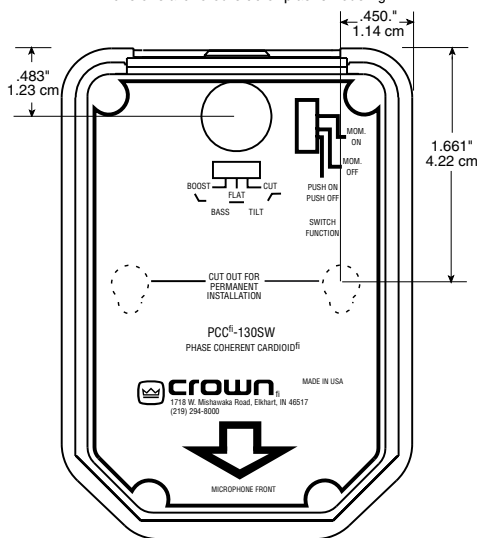

# PCC-130SW

### Architects' and Engineers' Specifications

The microphone shall be the Crown Model PCC-130SW or equivalent. The microphone shall be a half-supercardioid electret condenser type.

The microphone shall employ the principle of phase coherency achieved by mounting a small-diameter element very near a boundary, thus eliminating comb filtering in the audible spectrum. The microphone will exhibit excellent off-axis response and gain-before-feedback.

A 15-foot (4.6 m), two-conductor shielded cable with TA3F and A3M connectors shall be supplied with the microphone. As an option, the microphone may be obtained with a bottom-mounted stereo phone plug (model PCC-130SW/SPP, no cable provided).

Nominal sensitivity shall be 22 mV/Pa. Maximum SPL shall be 120 dB SPL for 3% THD. Equivalent noise shall be 22 dBA nominal. Frequency response shall be 50 Hz to 20,000 Hz with a uniform off-axis response, over 20 dB down at the rear nulls.

The PCC-130SW shall have a silent operating membrane switch which can be configured for push on/off, momentary on or momentary off operation. The Crown Model PCC-130SW is specified.

### Warranty

Crown professional microphones are guaranteed against malfunction for a period of three years from date of original purchase. Please refer to the enclosed full warranty sheet for more detail.

### Service

If the microphone does not function properly, check that it is aimed correctly and is configured and connected as described in this data sheet. If there is hum or no signal, first repair or replace the cable. If it is determined that the microphone needs additional service and you wish to return it to Crown, a Service Return Authorization (SRA) is required. An SRA can be completed online at [www.crownaudio.com/support/factserv.htm](http://www.crownaudio.com/support/factserv.htm). After securing an SRA, return the microphone in its original packaging to: **Crown Factory Service, 1718 W. Mishawaka Road, Elkhart, IN 46517-9439**. For further assistance or technical support call **800-342-6939**.



H A Harman International Company

Crown International  
1718 W. Mishawaka Rd.  
Elkhart, IN 46517-9439  
TEL: 574-294-8000  
FAX: 574-294-8FAX

©2006 Crown Audio®, Inc.  
Specifications subject to change without prior notice.  
Latest information available at [www.crownaudio.com](http://www.crownaudio.com).  
Crown, Crown Audio, PCC and Phase Coherent Cardioid are registered trademarks of Crown International, Inc.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>