




Fire alarm systems Enclosed heat detectors 6295, 6296, 6297 and 6298

- Fixed temperature alarm level
-  ATEX compliance
- Waterproof (IP67)

Fixed temperature alarm level

The detectors are conventional fixed temperature heat detectors, i.e. they will give an alarm within a response temperature range in accordance with EN54-5:2000.

The sensing element is a heat pick-up shield and a bimetal switch.

An LED on the detector (not on 6298) will light up when the detector goes into alarm. The detector also has an output for an external LED 2216 / 2217.

The following types are available (static response temperature, class & EN54-5 temp. range):

6295, 57°C, class A2 S (54 to 70°C).

6296, 72°C, class B S (69 to 85°C).

6297, 87°C, class C S (84 to 100°C).

6298, 117°C, class E S (114 to 130°C).

Latching

The detectors are latching, i.e. they will not be automatically reset if the temperature, after the alarm, falls below the detector's static response temperature. The detector's LED and a connected ext. LED will be lit until the detector is reset via the c.i.e.

ATEX classification

The detectors **6295** and **6296** complies with the ATEX classification **Ex II 3GD EEx nA II T5**. See also the opposite side of this page.

Waterproof connection box

The heat pick-up shield, the LED, all electronics, etc. are mounted in a grey waterproof detector housing, to be mounted on the attached connection box, which has three cable inlets. Three compression glands and a silicon gasket for IP67 are also attached.

Label holder

A label holder intended for a label showing "zone number", can be mounted in the connection box.

Miscellaneous

The detectors 6295-6298 are provided with three pairs of flying leads with female push-on connectors, see figure on the opposite side of this page. (Zone line cables (in / out) and an external LED.)


Product applications

The detectors can be used in the systems EBL500 / 512 / 128 / 1000 / 2000 provided with some zone line inputs for the system respectively (e.g. an 8 zones expansion board 1580 / 4580 input, an addressable zone interface 2226 / 2335 input, an addressable multi purpose I/O unit 3361 input, etc.).

Heat detectors are normally used in rooms where the temperature can be expected to rise rapidly in case of a fire or places where smoke detectors can not be used.

The detectors are intended for outdoor use or indoor use in high humidity premises.

Type numbers	
6295	Enclosed heat detector, 57°C, class A2 S (54 to 70°C).
6296	Enclosed heat detector, 72°C, class B S (69 to 85°C).
6297	Enclosed heat detector, 87°C, class C S (84 to 100°C).
6298	Enclosed heat detector, 117°C, class E S (114 to 130°C).
3390	Label holder (100 holders per packet, excl. labels).
3391	Labels for 3390 (10 sheets à 132 labels)

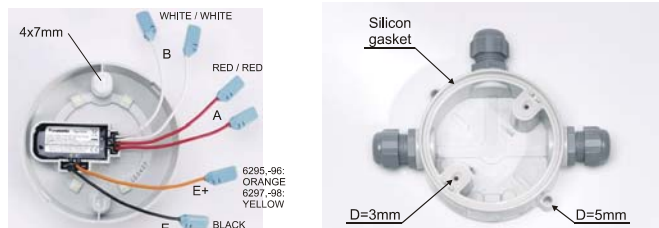

Detector mounting holes, 2x(4x7 mm) c/c = 70 mm. **E+ / E-** = Ext. LED. **A / B** = zone line in/out (or end-of-line device). Connectors for wire diameter 0.6 - 1.2 mm (approx. 0.3 - 1.13 mm²). **Connection box** mounting holes, 2x(5 mm) c/c = 108 mm. The connection box is prepared for required number of compression glands, one, two or three. A gland is approx. 30 mm high.

Technical data	
Voltage (V DC) rated allowed normal	24 12-30 24 (zone line voltage)
Current consumption at nom. voltage, quiescent (mA)	0
Current limitation required, when active (mA) (EBL equipment has current limitation.)	6295-6297: Must be min. 6 and max. 40 6298: Must be min. 6 and max. 30
Ext. LED output voltage (V) current output (mA)	Zone line voltage minus 2 V Max. 10 (no internal current limiter)
Alarm resistance (Ω)	For 6295-6297: approx. 400. For 6298: approx. 680
Internal capacitance (nF) Internal inductance	For 6295-6296: max. 50 For 6295-6296: 0
Ambient temperature (°C) operating (Min. / Typical / Max.) storage	6295 (A2 S): -40 / +25 / +50 6296 (B S): -40 / +40 / +65 6297 (C S): -40 / +55 / +80 6298 (E S): -40 / +85 / +110 -45 to +70 -45 to +70 -45 to +70 -45 to +70
Ingress Protection rating	IP67 (attached conn. box, silicon gasket and compression glands required)
Static response temperature	57, 72, 87, or 117°C depending on detector / class. See text.
Size Ø x h (mm)	Detector: 95 x 42 Connection box: 100 x 35 Detector + Connection box: 100 x 75 (excl. compression glands)
Weight (g)	Detector: 82 Connection box (incl. 3 glands): 134
Construction	Body (6295, 6296): ABS Body (6297, 6298): Modified Polycarbonate. Protector (on the body) & Connection box: Modified Polycarbonate.
Colour	Grey (N8, Munsell colour code)
Approvals	CE 05 EC Certificate no. 0845-CPD-232.1192 (6295); EN54-5 CE 05 EC Certificate no. 0845-CPD-232.1193 (6296); EN54-5 CE 05 EC Certificate no. 0845-CPD-232.1194 (6297); EN54-5 CE 05 EC Certificate no. 0845-CPD-232.1195 (6298); EN54-5
ATEX classification (for 6295 & 6296 only)	6295: II 3GD EEx nA II T5 (T100°C), -40°C ≤ T _a ≤ 50°C 6296: II 3GD EEx nA II T5 (T100°C), -40°C ≤ T _a ≤ 65°C

All technical features and data are subject to changes without notice, resulting from continuous development and improvement.

Product Leaflet	Date of issue	Revision / Date of revision
MEW00132	2001-10-19	9 / 2008-10-10

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>