

# EXECUTIVE™



## Withstanding The Test Of Time!

- Finds satellites on its own
- Works with ALL receivers.
- No Data Port required.
- Comes with dual-output LNB.
- Available with either an 18" or 24" dish face.



- Operational Temperature Range of -40°F to 145°F.
- Rugged design and all-aluminum construction.
- Fast, quiet two-axis motion (Elevation & Azimuth).
- Simple, two-button "Find and Stow" operation via the Nomad 2™ Controller.

**MotoSAT's™ flagship satellite television system is available with either an 18-inch or 24-inch reflector to deliver performance you can count on!**

The Executive™ stationary automatic satellite system holds the industry record for providing continuous service, for the most years, of any automatic satellite system in the industry today. It has set a benchmark that has been unsurpassed. Its ability to remain the leader speaks for itself. When coupled with the Nomad 2™ controller, it truly is the most sought after combination. The Executive™ system has the ability to provide service to DirecTV™, Dish Network™ or Bell ExpressVu™. It can be ordered with either an 18-inch dish, or a 24-inch dish for extended range. It offers the highest gain of any system available today. Stowing to a mere 10 inches in height for traveling, it is hardly noticeable on top of your RV. MotoSAT's™ trademark soft blue glow is proudly displayed on this remarkable system. For the user wanting reliability, style and performance, the Executive™ is the system to have. It truly has withstood the test of time!



**MotoSAT™**

MOBILE SATELLITE SYSTEMS

www.MotoSAT.com || 800.247.7486 || Sales@MotoSAT.com

THE EXECUTIVE™ IS POWERED BY  
**NOMAD 2**



**UNIVERSAL DVB CONTROLLER**

**INTERFACE:**

Two-button "Find and Stow"

**TUNER:**

DVB [Digital Video Broadcast] Tuner

**DIMENSIONS:**

10" long, 7" wide, 1.25" tall

**WEIGHT:**

2.5 lbs.

**CONTROLLER VOLTAGE:**

12 volt 4 amp DC

**EXECUTIVE™ TECHNICAL SPECIFICATIONS**

**CABLING**

**SUPPLIED INSTALLATION CABLE:**

30' 9-conductor 22 AWG control cable  
30' RG6 coaxial signal cable

**MOUNT CABLING:**

Mount comes pre-wired for two line outputs

**ENVIRONMENT**

**ON SATELLITE WIND OPERATIVE RANGE:**

45 mph

**STOWED WIND SURVIVABILITY:**

140 mph

**OPERATIONAL TEMPERATURE RANGE:**

-40 F° to 150 F°

**MAINTENANCE PORT**

**PROGRAM I/O:**

Serial Interface for software upgrades  
Optional program module available upon request

**MOTORS**

**MOVEMENT FUNCTION:**

Elevation, Azimuth

**MOTOR VOLTAGE:**

12 volt 1.2 amp DC maximum draw at search

**REFLECTOR SPECIFICATIONS**

**MOVEMENT:**

2 axis motor drive [elevation, azimuth]

**ANTENNA DIMENSIONS:**

18" x 20" or  
24" x 26.5" effective area (elliptical)

**DIMENSIONS**

**18" DIMENSIONS**

**STOWED**

10" tall, 19" wide, 35" long

**WEIGHT**

35 lbs.

**24" DIMENSIONS**


**STOWED**

10" tall, 25" wide, 38" long

**WEIGHT**

35 lbs

Ask Your Local **MotoSAT** Dealer:

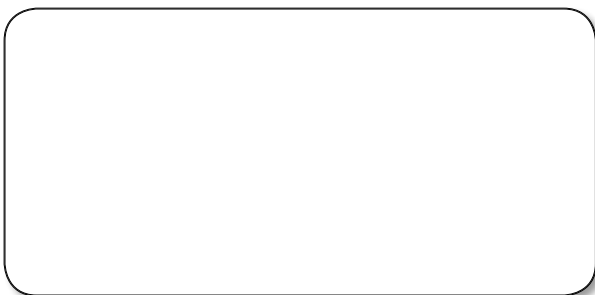

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>