



SuperPower

90 Watt Powered Speaker

| Setup Guide |

NHT's SuperPower 90 watt powered speaker represents our best efforts to date in active loudspeaker design.

Use this Setup Guide to help you unpack, connect and place them your new SuperPower speaker. If you are interested in more information about these and other NHT speakers, please visit our website at www.nhthifi.com, you will find complete owner's manuals and other tips to make the most of your installation. If at any time during or after setup you require personal assistance, feel free to call our Customer Hotline at 1-800-NHT-9993 (800-648-9993).

Satisfaction and Warranty

We hope you enjoy the sound of your NHT Classic speakers as much as we do. Warranty terms and conditions and service procedures varies by country of purchase. For USA and Canadian customers (and any worldwide customers who make their purchase from the NHT Web Store) please refer to the NHT website for warranty details and service procedure. If you bought from an NHT Authorized Dealer in North America, think about registering your purchase (and warranty) with us - not necessary for customers who purchase directly from the NHT Web Store. For other countries, please refer to the dealer and distributor in your country for warranty terms, warranty registration and service needs – you can find them at www.nhthifi.com.

Once again, if you have any questions or problems, please call us at our Consumer Hotline - 800-NHT-9993, or help@nhthifi.com.

Parts List

Here are some additional items you receive with your speaker:

- This Setup guide
- IEC Power cord
- 1/8" Stereo mini to RCA 'Y' jack.
- (4) Rubber bump-ons


Connections

Here are four of the most common connection methods you might encounter.

Connection method 1

Simple line out from a computer, Mp3 player phone, , etc.

Cords needed: 1/8" Stereo to RCA (supplied)

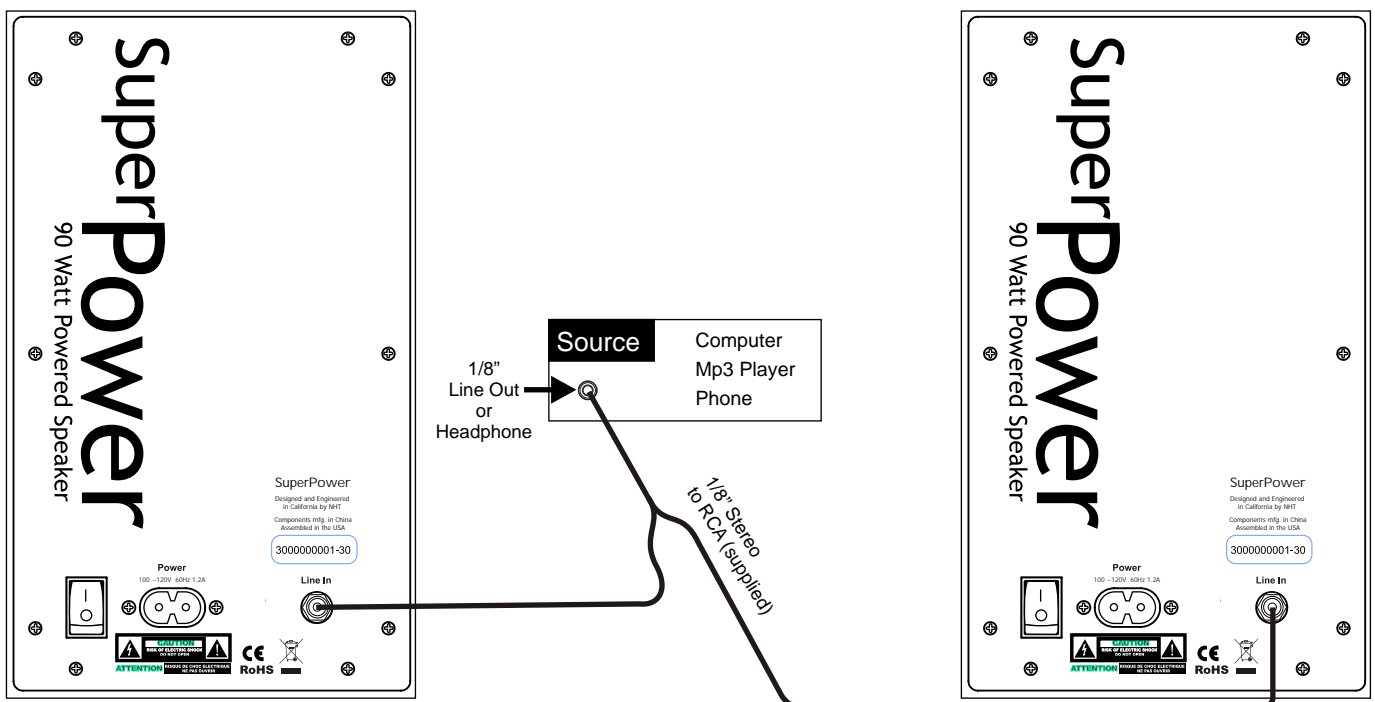


Connection method 2a

Line out from a computer, Mp3 player, phone, etc.
Using an NHT PVC passive volume control.
With Subwoofer.

Cords needed:

1/8" Stereo to RCA (supplied),
(2) RCA cables, 1/8" mono to RCA cable (for subwoofer)

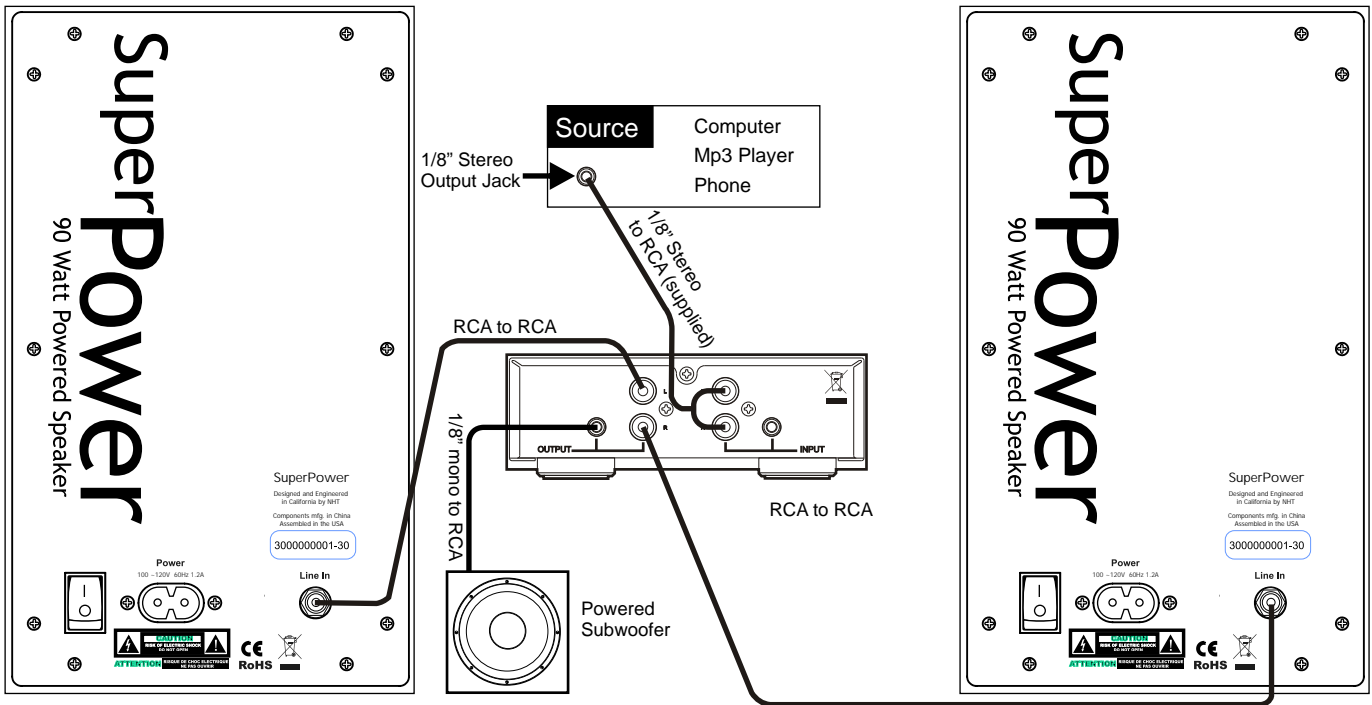


Connection method 2b

Line out from a computer, Mp3 player, phone, etc.
Same as above but without the PVC passive volume control. With Subwoofer.

Cords needed:

1/8" Stereo to RCA (supplied),
(2) Y-Adapter: RCA to RCA (pair), (2) RCA coupler.

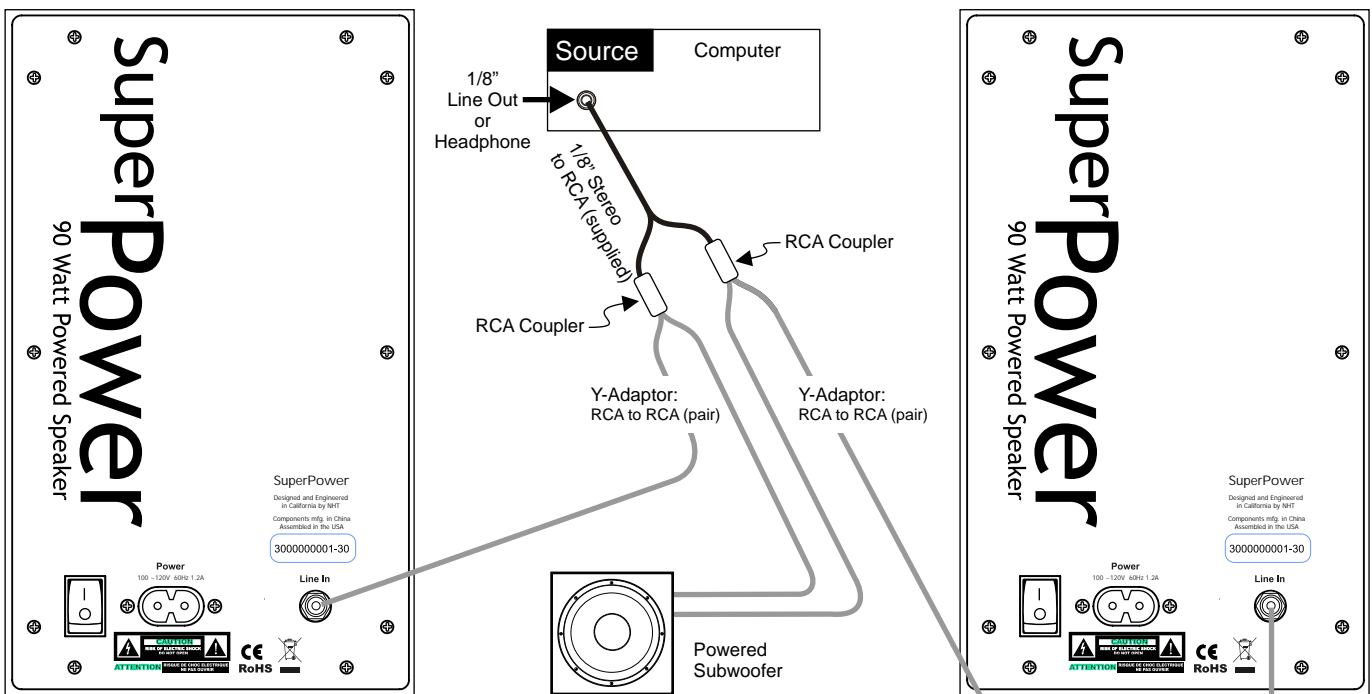


Connection method 3

Line out from a Stereo Preamp

Cords needed:

(2) RCA cables (3 if you use a subwoofer)

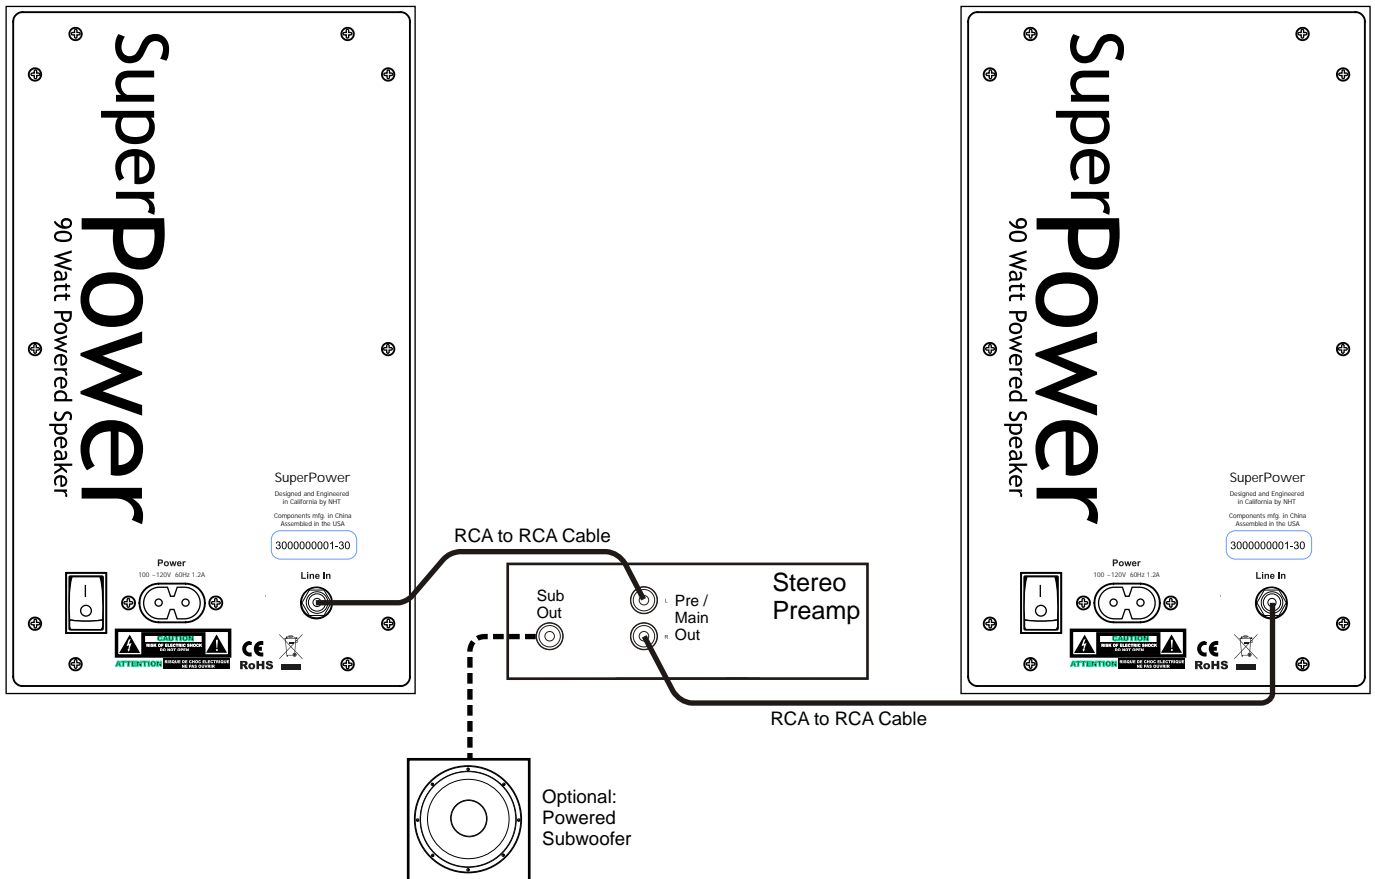

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>