

New Holland Discbine[®] Disc Mower-Conditioner Specifications



H7220 H7320 H7230 H7330

MODEL	H7220	H7320	H7230	H7330
MOWMAX™ CUTTERBAR WITH SHOCKPRO™ HUBS				
Number of discs	7	7	8	8
Number of knives	14 (2 per disc)	14 (2 per disc)	16 (2 per disc)	16 (2 per disc)
Speed, rpm	3000	3000	3000	3000
Cutting width, ft. in. (mm)	9' 2" (2800)	9' 2" (2800)	10' 4" (3160)	10' 4" (3160)
Cutting angle2 to 10 degrees, mechanical or hydraulic control.....	2 to 10 degrees hydraulic control	
Cutting height, in. (mm)0.95 to 3.2 (24 to 81) with standard skid shoes.....			
Ground clearance with header fully raised, in. (mm)	17 (432)	17 (432)	18 (457)	17 (432)
FlotationVertical and lateral, adjustable springs			
MATERIAL DISCHARGE				
Swath, ft. (mm)	6 (1829)	6 (1829)	7 (2134)	7 (2134)
Windrow, ft. (mm)Adjustable from 3 to 6 (914 to 1829).....	Adjustable from 3 to 7 (914 to 2134)	
HYDRAULICS				
Hydraulic swingStandard (double-acting cylinder).....			
Hydraulic liftStandard (operated by two single-acting cylinders; master/slave).....			
Hydraulic tiltOptional (operated by single-acting cylinder and incorporated into the lift system)	Standard (operated by single-acting cylinder and incorporated into the lift system)	
CONDITIONER				
Type	Chevron-design intermeshing molded rubber rolls	Flail rotor with 90 tapered flails and optional textured hood liner	Chevron-design intermeshing molded rubber rolls	Flail system with 102 tapered flails and optional textured hood liner
Length, in. (mm)	90 (2286)	90 (2286)	102 (2591)	102 (2591)
Diameter, in. (mm)	10.4 (264)	22 (560)	10.4 (264)	22 (560)
Drive	4 HB V-belt and enclosed gears	4 HB V-belt	4 HB V-belt and enclosed gears	4 HB V-belt
Speed, rpm	647	1016 std. or optional 730	635	1000 std. or optional 718
Conditioner adjustment	Single crank adjustable roll pressure and two stop bolts to adjust roll gap	Adjustable rotor hood with replaceable smooth liner	Single crank adjustable roll pressure and two stop bolts to adjust roll gap	Adjustable rotor hood with replaceable smooth liner
SPEEDS				
Operating, mph (kph)	0 to 9 (0 to 14.5)	0 to 9 (0 to 14.5)	0 to 9 (0 to 14.5)	0 to 9 (0 to 14.5)
Transport, mph (kph)	20 (32)	20 (32)	20 (32)	20 (32)
TUBELESS AG RIB IMPLEMENT TIRES				
Size	9.5L x 14 6PR	9.5L x 14 6PR	11L x 15 6PR	9.5L x 14 6PR

New Holland Discbine[®] Disc Mower-Conditioner Specifications



H7220 H7320 H7230 H7330

MODEL	H7220	H7320	H7230	H7330
DIMENSIONS				
Height, transport, ft. in. (m)	5' 8" (1.7)	5' 8" (1.7)	5' 8" (1.7)	5' 8" (1.7)
Height, operating, ft. in. (m)	4' 5" (1.3)	4' 5" (1.3)	4' 5" (1.3)	4' 5" (1.3)
Width, transport, ft. in. (m)9' 11" (3.0) with standard drawbar hitch11' 3" (3.4) with standard drawbar hitch	
Width, operating, ft. in. (m)14' 10" (4.52) with standard drawbar hitch16' 0" (4.6) with standard drawbar hitch	
Length, transport, ft. in. (m)17' 7" (5.3) with standard drawbar hitch17' 7" (5.3) with standard drawbar hitch	
Length, operating, ft. in. (m)	17' 2" (5.2) with standard drawbar hitch	17' 2" (5.2) with standard drawbar hitch	17' 2" (5.2) with standard drawbar hitch	17' 8" (5.4) with standard drawbar hitch
Weight, operating lbs. (kg)	3,690 (1674)	3,740 (1696)	4,165 (1889)	4,065 (1844)

NOTE: Rear curtain up for transport position on flail units. Windrow shields out for field and transport positions on flail and roll units.

DRIVE540 rpm PTO, enclosed gears and four HB belt.....540 or 1000 rpm PTO, enclosed gears and four HB belt.....

DRIVE PROTECTIONSlip clutch and over-running clutch.....

TRACTOR REQUIREMENT
65 PTO hp (48 kW) or greater with standard 80 PTO hp (60 kW) or greater with standard
 ASAE Category II and III drawbar. ASAE Category II and III drawbar.
All models require two remote hydraulic valves capable of 1500 psi (10343 kPa), 7-pin SAE J560 connector for transport lights

New Holland Discbine[®] Disc Mower-Conditioner Specifications



H7450 H7550 H7460 H7560

MODEL	H7450	H7550	H7460	H7560
MOWMAX™ CUTTERBAR WITH SHOCKPRO™ HUBS				
Number of discs	10	10	12	12
Number of knives	20 (2 per disc)	20 (2 per disc)	24 (2 per disc)	24 (2 per disc)
Speed, rpm	3000	3000	3000	3000
Cutting width, ft. in. (mm)	13 (3960)	13 (3960)	15' 7" (4795)	15' 7" (4795)
Cutting angle	2 to 10 degrees, hydraulic control			
Cutting height, in. (mm)	0.95 to 3.2 (24 to 81) with standard skid shoes			
Ground clearance with header fully raised, in. (mm)	18 (457)	18 (457)	18 (457)	18 (457)
Flotation	Vertical and lateral, adjustable springs			
MATERIAL DISCHARGE				
Swath, ft. (mm)	8 (2438)	8 (2438)	8 (2438)	8 (2438)
Windrow, ft. (mm)	Adjustable from 3 to 8 (914 to 2438)			
HYDRAULICS				
Hydraulic swing	Standard (double-acting cylinder)			
Hydraulic lift	Standard (operated by two single-acting cylinders; master/slave)			
Hydraulic tilt	Standard (operated by single-acting cylinder and incorporated into the lift system)			
CONDITIONER				
Type	Chevron-design intermeshing molded rubber rolls hood liner	Flail system with 102 tapered flails and optional textured	Chevron-design intermeshing molded rubber rolls	Flail system with 102 tapered flails and optional textured hood liner
Length, in. (mm)	102 (2591)	102 (2591)	102 (2591)	102 (2591)
Diameter, in. (mm)	10.4 (264)	22 (560)	10.4 (264)	22 (560)
Diameter, in. (mm)	4 HB V-belt and enclosed gears	4 HB V-belt	4 HB V-belt and enclosed gears	4 HB V-belt
Speed, rpm	740	1011 std. or optional 726	740	1000 std. or optional 726
Conditioner adjustment	Single crank adjustable roll pressure and two stop bolts to adjust roll gap	Adjustable rotor hood with replaceable smooth liner	Single crank adjustable roll pressure and two stop bolts to adjust roll gap	Adjustable rotor hood with replaceable smooth liner
SPEEDS				
Operating, mph (kph)	0 to 9 (0 to 14.5)	0 to 9 (0 to 14.5)	0 to 9 (0 to 14.5)	0 to 9 (0 to 14.5)
Transport, mph (kph)	20 (32)	20 (32)	20 (32)	20 (32)
TUBELESS AG RIB IMPLEMENT TIRES				
Size	31 x 13.5-15	31 x 13.5-15	31 x 13.5-15	31 x 13.5-15

New Holland Discbine[®] Disc Mower-Conditioner Specifications



H7450 H7550 H7460 H7560

MODEL	H7450	H7550	H7460	H7560
DIMENSIONS				
Height, transport, ft. in. (m)	6' 8" (2.6)	6' 8" (2.6)	6' 8" (2.6)	6' 8" (2.6)
Height, operating, ft. in. (m)	5' 8" (1.7)	5' 8" (1.7)	5' 8" (1.7)	5' 8" (1.7)
Width, transport, ft. in. (m)13' 2" (4.0) with standard drawbar hitch, 2-pt swivel hitch or drawbar swivel hitch	15' 9" (4.8) with 2-pt swivel hitch or drawbar swivel hitch.....	
Width, operating, ft. in. (m)19' 5" (5.9) with standard drawbar hitch21' 3" (6.5) with 2-pt swivel hitch.....19' 7" (5.9) with drawbar swivel hitch24' 11" (7.6) with 2-pt swivel hitch23' 3" (7.1) with drawbar swivel hitch	
Length, transport, ft. in. (m)24' 7" (7.2) with standard drawbar hitch26' 5" (8.1) with 2-pt swivel hitch.....25' 5" (7.4) with drawbar swivel hitch30' 5" (9.3) with 2-pt swivel hitch29' 5 in. (8.7) with drawbar swivel hitch25' 2" (7.7) with 2-pt swivel hitch	
	20' 2" (5.8) w/std drawbar hitch	20' 8" (6.3) w/std drawbar hitch		
	22' 1" (6.7) w/2-pt swivel hitch	22' 7" (6.9) w/2-pt swivel hitch		
	21' 1" (6.1) w/drawbar swivel hitch	21' 7" (6.6) w/drawbar swivel hitch		
Weight, operating lbs. (kg)	5,800 (2631)	5,680 (2576)	6,500 (2948)	6,380 (2894)

NOTE: Rear curtain up for transport position on flail units. Windrow shields out for field and transport positions on flail and roll units.


DRIVE.....1000 rpm PTO, enclosed gears and four HB belt.....

DRIVE PROTECTION.....Slip clutch and over-running clutch.....

TRACTOR REQUIREMENT
90 PTO hp (67 kW) or greater with standard Category II
 and III drawbar or Category III 3-point hitch.
100 PTO hp (74.5 kW) or greater with Category III.....
 drawbar or Category III 3-point hitch.
All models require two remote hydraulic valves capable of 1500 psi (10343 kPa), 7-pin SAE J560 connector for transport lights

Visit our Web site at www.newholland.com/na. Or, call toll-free **866-NEW-HLND (866-639-4563)**.

Design, materials and/or specifications are subject to change without notice and without liability therefor. Specifications are applicable to units sold in Canada, the United States, its territories and possessions, and may vary outside these areas.

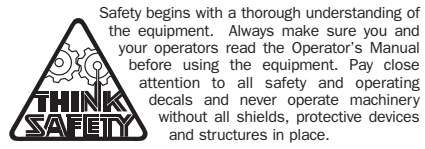

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>