




# **Stereo Headset Amplifier With Mike Return & Radar Beep Capability**

**Part #MA-967**

## **Installation Instructions**

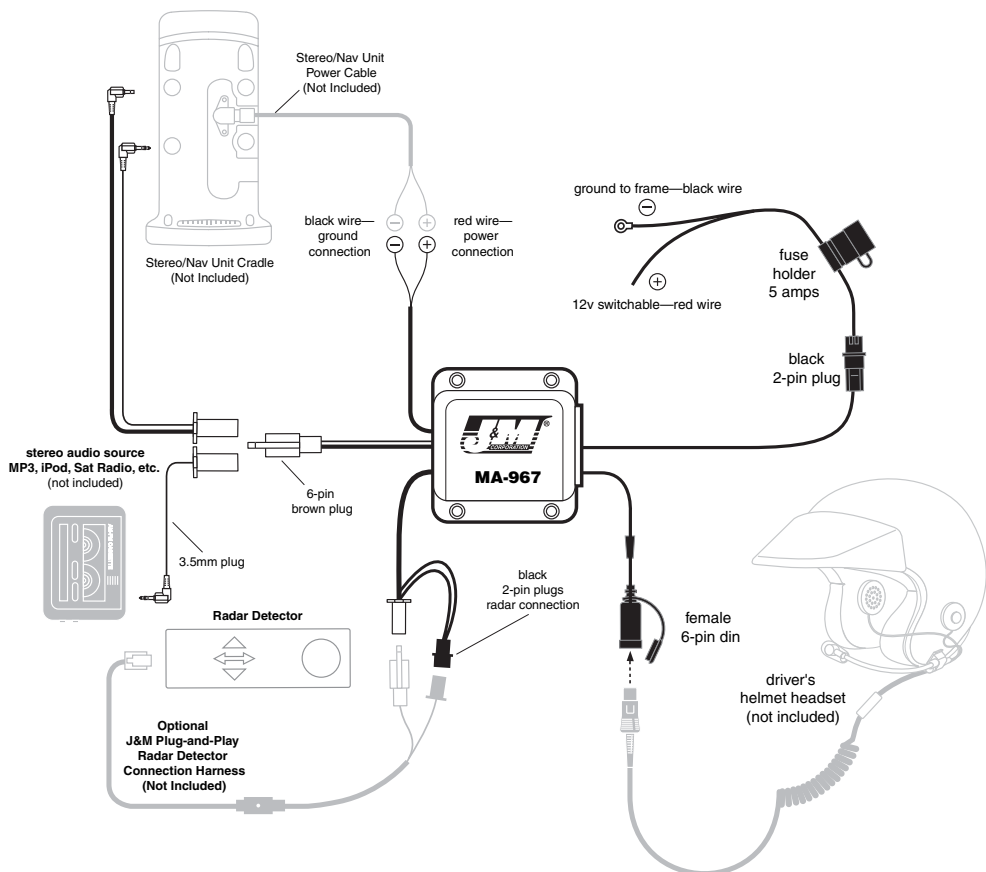

## Installation

1) Mount the MA-967 amplifier where desired in the left side of your fairing or in a convenient location using the provided screws and nuts, double back tape, and/or tie straps. Take into account the length of the wires going to all of the components prior to mounting.

2) Using the supplied butt connectors, connect your Stereo/NAV unit power harness to the red and black wires from the MA-967 amplifier. Plug the 2.5mm mono and the 3.5mm stereo plugs from the MA-967 to your music source or Stereo/NAV unit. Connect the brown 6-pin plug from the harness to the brown 6-pin plug from the MA-967 amplifier.

**(See Diagram) Note: The MA-967 amplifier can be used with your personal music device for stereo audio amplification into the drivers helmet headset. Simply plug the 3.5mm plug from the connection harness into your music device and not use the 2.5mm mono plug.**

- 3) Using one of J&M's Plug and Play radar harnesses, connect your radar detector to the proper plugs from the MA-967 amplifier. **(See Diagram)**  
**Note: It is not necessary to use the radar detector cable option for proper operation of this audio system.**
- 4) Route the headset lead from the MA-967 amplifier to the left handlebar or to a convenient location on your motorcycle, to allow convenient connection of your helmet headset.
- 5) Connect the power wire (with fuse holder) to a switchable power source or accessory terminal, so that the amplifier is turned off when the ignition is turned off. Connect the black wire to a good frame ground (not to the battery negative).

### **Operation - Cell Phone**

This integration terminal can utilize the available Bluetooth cell phone link built into many of today's Stereo/NAV units, for hands free cell phone operation through a single helmet headset. (See operation manual for your particular Stereo/NAV unit.)

### **Operation - Radar/Audio**

The beeps/braps from the radar detector will be heard in one speaker of the helmet headset if so installed.

The volume levels of each of your Stereo/NAV unit's audio functions (stereo music/GPS route commands, etc.) can be adjusted individually using the controls built into your particular Stereo/NAV unit.

---

Thank you for the confidence you have shown by purchasing one of J&M's innovative products. If you have any questions during installation, or require further assistance, you may call us at 1-800-358-0881 from 8:00 a.m. to 5:00 p.m. Mountain Standard Time, Monday through Friday.



Tucson, Arizona, U.S.A.

Tel: (800) 358-0881

Website: <http://www.jmcorp.com>

E-mail: [audio@jmcorp.com](mailto:audio@jmcorp.com)

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>