

## ASMP-36 Roll-In Rack Proofer

Project \_\_\_\_\_

Item \_\_\_\_\_

Quantity \_\_\_\_\_



**SIZE:**

**ASMP-36** - 89-1/8" High, 61-7/8" Wide, 37-1/8" Deep  
2264 mm High, 1572 mm Wide, 943 mm Deep

**NU-VU's ASMP-36** roll-in rack proofer features heavy-duty stainless steel construction, with solid doors. These units also feature the AutoMist humidity system. While these units do not come standard with a roll-in rack, they are available as an accessory item.

**CONSTRUCTION:**

- Welded stainless steel
- Fully insulated
- Control panel accessible through front and top of unit
- Heating elements accessible inside of cabinet and through top

**CONTROLS:**

- Solid state controls
- Indicator light for thermostat
- Separate heat and humidity controls
- 60 minute timer

**NU-VU® ASMP-36 Roll-In Rack Proofer**

**STANDARD FEATURES:**

- Stainless steel construction
- Solid doors
- Solid state controls
- AutoMist humidity system
- Magnetic Handles

**OPTIONAL FEATURES:**

- Stainless steel roll-in rack (20-1115)



**NU-VU® Food Service Systems**


www.nu-vu.com  
5600 13th Street  
Menominee, MI 49858

1-800-338-9886 Toll Free  
1-906-863-4401 Phone  
1-906-863-5889 Fax



Approval / Stamp

## ASMP-36 Roll-In Rack Proofer

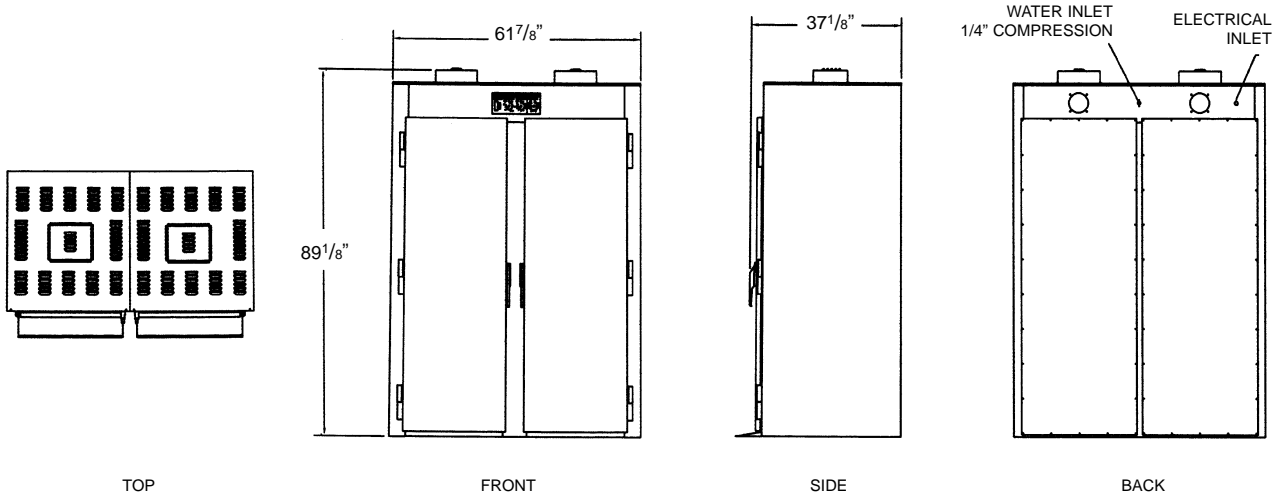

**NU-VU® ASMP-36 Roll-In Rack Proofer**

### SPECIFICATIONS:

#### ELECTRICAL:

#### SERVICE CONNECTIONS:

- Unit is shipped from factory to be hard wired on site. Single phase uses three-wire system. Three phase uses four-wire system
- 208 or 240 Volt single phase is standard. Please specify at time of order.
- A 1/4" waterline is required. A water softening system should be used to minimize mineral build-up.

#### ELECTRICAL:

Amp Draw	208/1	208/3	240/1	240/3
	22	20	19	17

### INSTALLATION:

Allow four inches on each side and back of unit for ventilation of oven.

### CAPACITY:

	18"x26" Sheet Pans	13"x18" Sheet Pans	Spacing
<b>Proofer</b>	36	72	n/a

### DIMENSIONS:

	Height	Width	Depth
<b>Exterior</b>	89-1/8"	61-7/8"	37-1/8"
<b>Interior Per Side</b>	75-5/8"	24"	32-3/4"

**DOOR SWING:** Proofer - 31-1/2" (800 mm)

### PACKING SIZE:

83" High, 60" Wide, 38" Deep  
(2108 mm High, 1524 mm Wide, 965 mm Deep)

### SHIPPING WEIGHT:

1000 Pounds (454 Kg), FOB Menominee, MI 49858

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>