





CELEBRITY™ SERIES MICROPHONES

Specifications





Model #: **CD-20™**
Type: Dynamic
Polar Pattern: Cardioid
Impedance: 250 ohms
Frequency Response: 50 - 16,000 Hz
Sensitivity: -76 dB (0 dB = 1V/microbar)
Front to Back Ratio: > 20 dB
Case: Urethane coated die-cast zinc alloy
Windscreen: Brazed steel mesh with integral foam pop filter
Connector: 3 pin XLR
Weight: 8 oz.
Dimensions: 2.240" x .850" x 6.250"
Accessories Included: Swivel Adaptor
Foam Lined Tote Bag
Options: CD-20L™ Microphone with 25' Low Impedance cable and connectors
CD-20LS™ Microphone with 25' Low Impedance cable, connectors and rotary type on/off (shorting) switch at microphone end
CD-20H™ Microphone with 25' High Impedance cable and connectors (XLR to 1/4" phone plug)
CD-20HS™ Microphone with 25' High Impedance cable and connectors (XLR to 1/4" phone plug) with rotary type on/off (shorting) switch at microphone end

Model #: **CD-30™**
Type: Dynamic (with Hum Compensation Coil)
Polar Pattern: Cardioid
Impedance: Low (300 ohms)
Frequency Response: 80 - 19,000 Hz
Sensitivity: -77 dB (0 dB = 1V/microbar)
Hum Induction: Equivalent to 9.0 dB SPL (Hum output of microphone in a 1 MilliOersted hum field is equal to its output from a 9.0 dB SPL acoustic source)
Front to Back Ratio: > 20 dB
Case: Urethane coated die-cast zinc alloy
Windscreen: Brazed steel mesh with integral foam pop filter
Connector: 3 pin XLR
Weight: 8 oz.
Dimensions: 2.240" x .850" x 6.250"
Accessories Included: Swivel Adaptor
Foam Lined Tote Bag
Options: CD-30L™ Microphone with 25' Low Impedance cable and connectors
CD-30LS™ Microphone with 25' Low Impedance cable, connectors and rotary type on/off (shorting) switch at microphone end
CD-30H™ Microphone with 25' High Impedance cable and connectors (XLR to 1/4" phone plug)
CD-30HS™ Microphone with 25' High Impedance cable and connectors (XLR to 1/4" phone plug) with rotary type on/off (shorting) switch at microphone end

Model #: **HD-40™**
Type: Dynamic (with Hum Compensation Coil)
Polar Pattern: Hyper Cardioid
Impedance: Low (300 ohms)
Frequency Response: 80 - 18,000 Hz
Sensitivity: -77 dB (0 dB = 1V/microbar)
Hum Induction: Equivalent to 9.0 dB SPL (Hum output of microphone in a 1 MilliOersted hum field is equal to its output from a 9.0 dB SPL acoustic source)
Front to Back Ratio: > 20 dB (120°-150° off axis)
Case: Urethane coated die-cast zinc alloy
Windscreen: Brazed steel mesh with integral foam pop filter
Connector: 3 pin XLR
Weight: 8 oz.
Dimensions: 2.240" x .850" x 6.250"
Accessories Included: Swivel Adaptor
Foam Lined Tote Bag
Options: HD-40L™ Microphone with 25' Low Impedance cable and connectors
HD-40LS™ Microphone with 25' Low Impedance cable, connectors and rotary type on/off (shorting) switch at microphone end
HD-40H™ Microphone with 25' High Impedance cable and connectors (XLR to 1/4" phone plug)
HD-40HS™ Microphone with 25' High Impedance cable and connectors (XLR to 1/4" phone plug) with rotary type on/off (shorting) switch at microphone end



5 dB per division

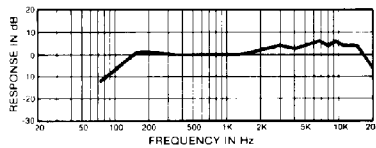

CELEBRITY™ SERIES MICROPHONES

APPLICATIONS

CD-20™

Our new CD-20™ combines performance, ruggedness and serviceability in one compact, unbelievably durable package. The CD-20™ utilizes our unique shock mounting system that even further enhances the performance capabilities of the dynamic cardioid element itself. The cardioid pattern provides better than 20 dB rejection from the rear, thus greatly enhancing the microphone's capabilities before feedback. Overall, the CD-20™ may be considered virtually a "universal" performing microphone. As with other CD™ Series microphones, we have incorporated field repairability, should repairs become necessary under the extremes of road abuse. The CD-20™ is built "to take it" but at the same time, this versatile new microphone is able to "dish it out" as well as any, performance-wise.

CD-30™

The CD-30™ represents what we feel is a breakthrough in performing microphones. The CD-30™ features our super cardioid element with a special "humbucking" coil that quite effectively minimizes any extraneous noises that might be introduced into the microphone itself. The unit features premium connectors, our special low noise cable formulation, and above all, field repairability should repairs ever be necessary.

HD-40™

The new HD-40™ dynamic cardioid is a premium dynamic microphone featuring a "hyper cardioid" pickup pattern. The microphone element itself has been designed utilizing a "humbucking" coil that effectively counterbalances any hum that may be picked up from external sources. The HD-40's™ superb reliability traits and field repairability make it a sound investment for vocal and instrumental applications. We do encourage comparison of our HD-40™ with any competing cardioid microphone, and this versatile new unit will certainly illustrate its marked superiority.

PEAVEY MICROPHONE LIMITED WARRANTY/REMEDY

PEAVEY ELECTRONICS CORPORATION ("Peavey") warrants this microphone to the original retail purchaser to be free from defects in material and workmanship for a period of one (1) year from date of purchase; provided, however, that the existence of this limited warranty is subject to the conditions, exclusions and limitations hereinafter set forth.

In case of a covered defect in material or workmanship, Peavey will repair or replace the microphone, at Peavey's option, provided that consumer:

- (a) brings the defective microphone to any Peavey Authorized Dealer or Service Center and presents therewith a copy of the sales receipt or other proof of purchase. If the DEALER or SERVICE CENTER is unable to provide the necessary warranty service, the consumer will be directed to the nearest other PEAVEY AUTHORIZED DEALER or SERVICE CENTER which can provide such service; or
- (b) returns the defective microphone, shipping charges prepaid, to Peavey Electronics Corporation, 711 A Street, Meridian, Mississippi, and includes therewith a written description of the problem, a copy of the sales receipt or other proof of purchase and consumer's complete return address.

If the defect is remedial under this limited warranty and the other terms and conditions expressed herein have been complied with, Peavey will provide the necessary warranty service to repair or replace the microphone and will return it, freight collect, to the consumer.

Under no circumstances will Peavey be liable for any lost profits, lost savings or other consequential or incidental damages arising out of the use or inability to use the product, even if Peavey had been advised of the possibility of such damages.

THIS LIMITED WARRANTY IS IN LIEU OF ANY AND ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR USE; provided, however, that upon compliance with the other terms and conditions necessary to the existence of the express limited warranty, such implied warranties are not disclaimed during the applicable one year period from date of purchase of this product.

SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS OR THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU. THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH MAY VARY FROM STATE TO STATE.

In the event any modification or disclaimer of express or implied warranties or any limitation of remedies contained herein conflicts with applicable law, then such modification, disclaimer or limitation as the case may be, shall be deemed to be modified to the extent necessary to comply with such law.

Peavey Electronics Corporation gives this limited warranty only with respect to Peavey microphones purchased in the United States of America.

This limited warranty shall be void and of no effect if:

- (a) first purchase of the product is for the purpose of resale, or
- (b) the original retail purchase is not made from an AUTHORIZED PEAVEY DEALER; or
- (c) the product has been damaged by accident or unreasonable use, neglect, improper service or maintenance, or other causes not arising out of defects in material or workmanship.

*PEAVEY CABLE WARRANTY

Peavey "Celebrity™" Series cables are warranted to the original retail purchaser to be free of defects in materials and workmanship for a period of two (2) years from the date of purchase. Should such a defect occur, return the cable, freight collect, to Peavey Electronics Corporation with proof of purchase. The product will be repaired or replaced, at our option, and returned to you, freight collect. This limited warranty shall be void if product is damaged by accident, unreasonable use, neglect or improper service. This warranty gives you specific legal rights. You may have others which vary from state to state.

*Limited warranty in accordance with provisions of Section 103 Magnuson-Moss Act.

PEAVEY ELECTRONICS CORPORATION
711 A Street / Meridian, MS 39301 / U.S.A.

©1983 / Printed in U.S.A.
80370398 / 7/83

Due to our efforts for constant improvement, features and specifications listed herein are subject to change without notice.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>