

# SPECIFICATIONS TLS™ 4X



**Nominal coverage pattern:**  
90° x 40°

**Electro-acoustic crossover frequencies:**  
300 Hz, 2.6 kHz

**Nominal impedance:**  
4 Ohms

**Input connections:**  
Two 1/4" phone jacks in parallel

**Enclosure materials and finish:**  
Trapezoidal, black carpet-covered enclosure with dado joined 1/2" MDF (Medium Density Fiberboard) and a full-length black powder-coated steel grille

**Dimensions (H x W x D):**

**Front:**

44.75" x 18.25" x 17.563"  
113.66 cm x 43.36 cm x 44.61 cm

**Rear:**

44.75" x 12.25" x 17.563"  
113.66 cm x 31.12 cm x 44.61 cm

**Weight:**  
81 lbs. (36.82kg)

**Bullets:**

- Quasi-three-way sound reinforcement enclosure
- Peavey exclusive Sheffield Pro 1500 HO woofers with 2.5" voice coils
- 1.4" 14XT Plus™ titanium diaphragm compression driver
- Sound Guard IV tweeter protection
- 800 Watts program/1600 Watts peak power handling
- Heavy duty crossover network for driver protection and EQ
- Rugged trapezoidal enclosure
- 90° x 40° coverage constant directivity horn for better off-axis tonality

**Frequency range (-10 dB, half space):**  
40 Hz to 21 kHz

**Maximum SPL:**  
131 dB

**Frequency response (+/- 3dB, half space):**  
58 Hz to 18 kHz

**Transducer complement:**  
Two Sheffield® Pro 1500 HO™ 15" premium woofers, 14XT Plus™ 1.4" titanium diaphragm dynamic compression driver on a 90° x 40° coverage constant directivity horn

**Sensitivity (1w/1m):**  
100 dB

**Driver protection:**  
Sound Guard™ IV for the compression driver provides long- and medium-term overload and overdrive protection

**Power rating (program):**  
800 Watts

**Peak power capacity (peak):**  
1,600 Watts



## SPECIFICATIONS      TLS™ 4X

- High quality, heavy duty carpet covering
- Steel handles
- Steel corners
- Rugged dado and rabbet construction for light weight-yet-strong joinery
- T-Nut speaker mounting
- Heavy duty, full-length steel grille

### Description

The TLS 4X is a quasi-three-way speaker system utilizing two 15" Sheffield® Pro 1500 HO™ woofers and a 14XT Plus™ titanium diaphragm dynamic compression driver mounted on a 90° x 40° coverage constant directivity horn.

The rugged, carpet-covered trapezoidal enclosure with steel handles facilitates portable use for live music, speech sound reinforcement and music playback. A full-length black powder-coated steel grille provides driver protection and a professional appearance.

The TLS™ 4X speaker system is rated at 800 Watts program power handling, and the full crossover network includes high voltage film caps and Sound Guard™ IV tweeter protection for clear, punchy sound and excellent long-term reliability. Two 1/4" phone jack input connectors make hook-up a breeze.

### 3 + 2 YEAR LIMITED WARRANTY

**NOTE:** For details, refer to the warranty statement. Copies of this statement may be obtained by contacting Peavey Electronics Corporation, P.O. Box 2898, Meridian, Mississippi 39301-2898.

Amplitude Response (1W 1m On-Axis)

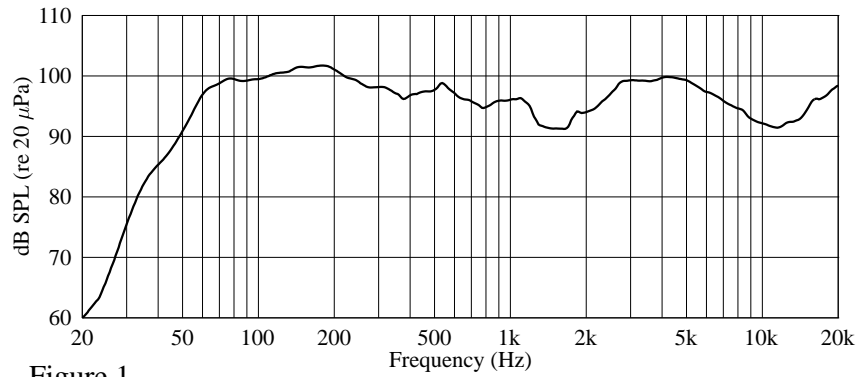


Figure 1

Beamwidth

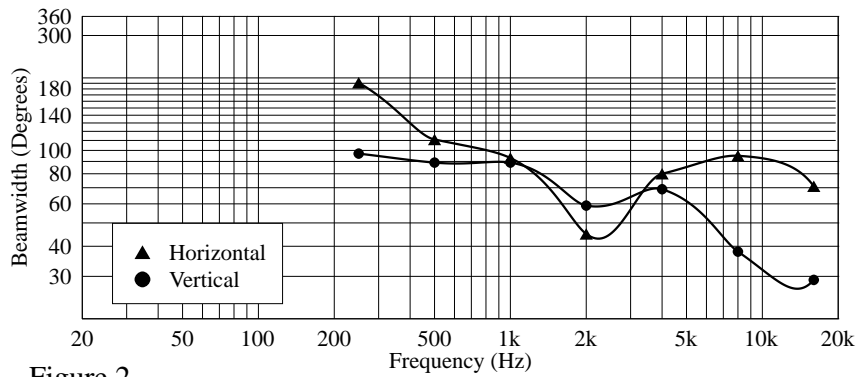


Figure 2

Q & Directivity Index

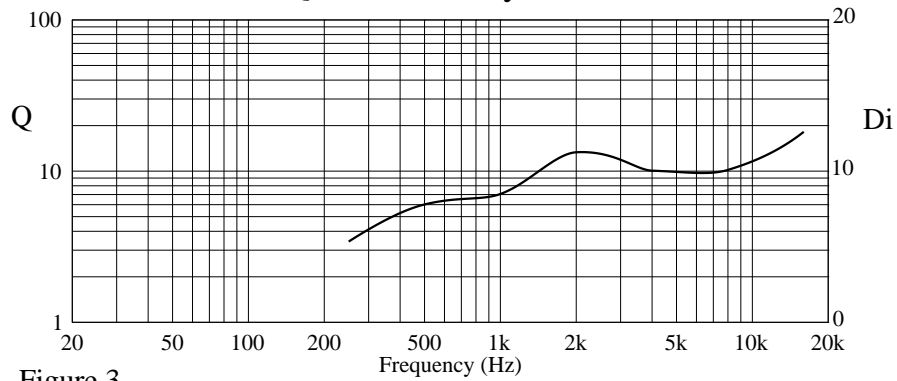


Figure 3



80305050

Features and specifications subject to change without notice.

Peavey Electronics Corporation • 711 A Street • Meridian • MS • 39301 (601) 483-5365 • FAX (601) 486-1278 • [www.peavey.com](http://www.peavey.com)  
©2003 Printed in the U.S.A. 2/03



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>