

PP740(-S)

Pivot Wall Mount for 22"-40" Flat Panel Displays

Smoothly pull out and position this mount to the ideal viewing angle then retract it tight to the wall to save space. With integrated cable management, cords and cables are never in the way - even when extending and retracting the display.



Display size: 22"-40"




Max load: 80lb (36kg)

FEATURES

- Extends 7.97" (202mm) from the wall
- Retracts to 2.69" (68mm) to save space
- Integrated cable management keeps cables and cords out of the way
- +15/-5° of tilt for optimal viewing angles
- ±7° of roll to level display horizontally
- Up to ±90° of swivel
- VESA® 75/100, 200 x 100, 200 x 200mm compliant
- UL listed

VIEWING FLEXIBILITY
Extends 7.97" (202mm) from the wall

DISPLAY POSITIONING
Up to ±90° of swivel

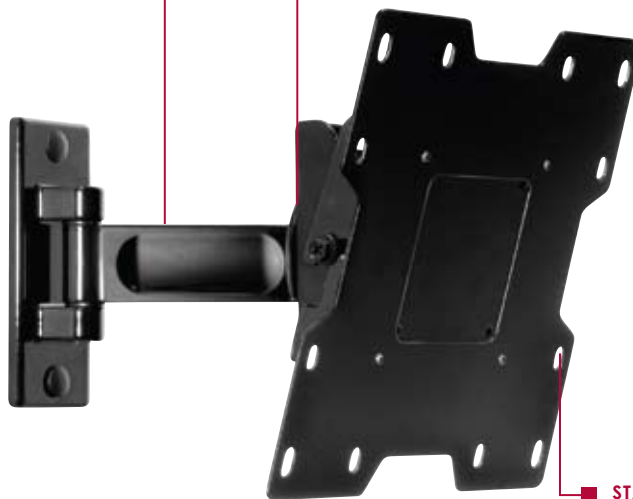

STANDARDIZED COMPATIBILITY
VESA® 75/100, 200 x 100
and 200 x 200mm compliant



Tilt allows adjustment of +15/-5°



Integrated cable management



CLICK: www.peerlessmounts.com CALL: 800.865.2112 FAX: 708.865.2941

peerless®

PP740(-S) Pivot Wall Mount for 22"-40" Flat Panel Displays

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
PP740(-S)	8.75"-10.12" x 9.35" x 2.69"-7.97" (222-257 x 237 x 68-202mm)	2.67lb (1.21kg)	80lb (36kg)	Scratch resistant fused epoxy	PP740: Gloss black PP740-S: Gloss silver


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
PP740(-S)	10.625" x 10.313" x 4" (270 x 262 x 102mm)	3.84lb (1.74kg)	PP740: 735029256113 PP740-S: 735029256120	Mount with VESA® 75/100, 200 x 100 and 200 x 200mm adapter, all necessary mounting and display attachment hardware	1

Accessories

- ACC919:** Security Fasteners
- WSP700:** Metal Stud Wall Plate for 16" Center Metal Studs
- WSP701:** Metal Stud Wall Plate for 20" and 24" Center Metal Studs

All dimensions = inch (mm)

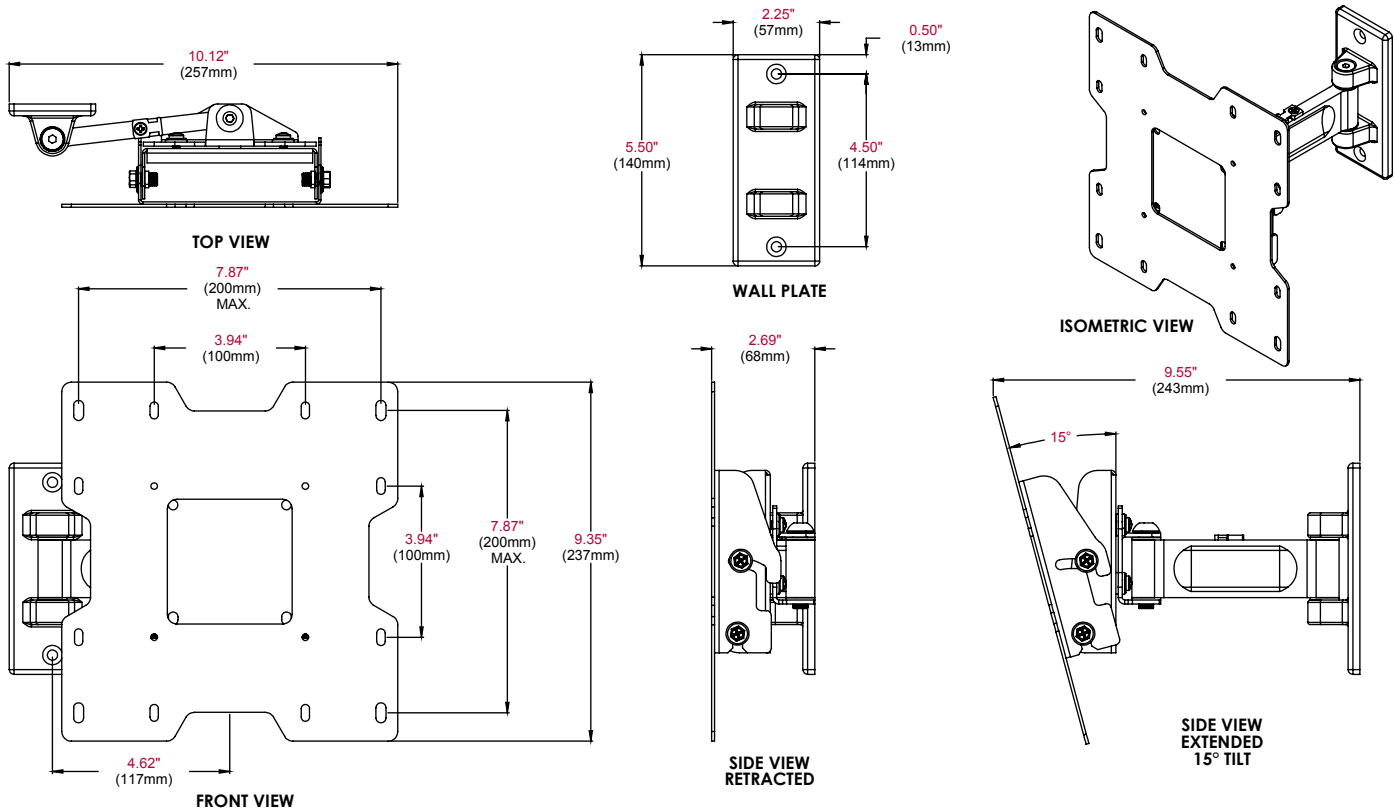

ARCHITECTS SPECIFICATIONS

The Articulating Wall Mount shall be a Peerless model PP740 and shall be located where indicated on the plans. It shall feature scratch resistant black or silver fused epoxy finish. Assembly and installation shall be done according to instructions provided by the manufacturer.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>