OPERATION:

- 1 INSERT AC POWER PLUG INTO A 110V VOLT AC OUTLET.
- 2 CONNECT THE POWER CORD OF YOUR EQUIPMENT (13.5V 14.1 VDC) TO THE OUTPUT BINDING POST TERMINALS ON THE FRONT OF THE UNIT. BE SURE THAT POLARITY IS CORRECT THE RED POSITIVE (+) TERMINAL AND BLACK NEGATIVE (—) TERMINAL ARE MARKED. REVERSAL OF POLARITY MAY DAMAGE YOUR EQUIPMENT
- 3 TURN SWITCH TO "ON", RED LIGHT IN SWITCH WILL ILLUMINATE.
- 4 THE INPUT POWER IS PROTECTED BY THE FUSE WHICH IS LOCATED AT THE REAR OF THE UNIT AND CAN BE REPLACED BY UNSCREWING THE FUSE HOLDER IF THE FUSE IS BURNT OUT. DO NOT USE A FUSE LARGER THAN 1.5 AMPS. USE OF HEAVIER FUSE MAY RESULT IN DAMAGING TO THIS UNIT
- 5 THIS UNIT HAS ELECTRONIC OVERLOAD PROTECTION WITH INSTANT AUTOMATIC RESET FUNCTION IF OUTPUT IS OVERLOADED THE OUTPUT POWER WILL AUTOMATICALLY SHUT OFF RELEASE POWER CORD OF YOUR EQUIPMENT FROM THE OUTPUT TERMINALS AND CHECK THE ACTUAL POWER RATING OF YOUR EQUIPMENT THIS UNIT WILL AUTOMATICALLY RESET INSTANTLY.
- 6 OVER TEMPERATURE PROTECTION CIRCUITRY IS USED IN PSL92X TO PREVENT OVER HEAT DAMAGE UNIT WILL BE SHUT DOWN MINUTES AFTER 15 MINUTES(MIN.) AT 100% RATED LOAD.

25 MINUTES(MIN.) AT 80% RATED LOAD

7 THIS UNIT FEATURED WITH A CAR CIGARETTE JACK FOR THE CONVENIENCE OF YOUR MULTIPLE CHOICES.

CAUTIONS:

- 1 DO NOT USE WITH EQUIPMENT REQUIRING MORE THAN RATING AMPS
- 2 DO NOT USE OUTDOORS DO NOT EXPOSE, UNIT TO RAIN. MOISTURE. WATER OR ANY OTHER LIQUIDS
- 3 DO NOT REMOVE COVER IN ANY CASE RETURN TO DEALER FOR REPAIR IF DAMAGED.
- 4 THIS UNIT HAS A SPECIAL BUILT-IN FEATURE THAT WILL SHUT THE UNIT DOWN IF MARKED AMPERAGE IS EXCEEDED. THIS WILL AVOID BURN-OUT OF YOUR EQUIPMENT AND OF UNIT IF UNIT DOES CONSISTENTLY SHUTDOWN. THIS MEANS YOU ARE DRAWING TOO MUCH AMPERAGE RETURN UNIT TO PLACE OF PURCHASE AND UPGRADE TO NEXT AVAILABLE UNIT OFFERING HIGHER AMPERAGE. PLEASE DO NOT BYPASS OR ALTER THIS CIRCUIT AS IT IS THERE TO PROTECT YOU. ANY ALTERATION OR MISUSE WILL VOID YOUR WARRANTY.

"DANGER"
HIGH VOLTAGE
REFER TO QUALIFIED TECHNICIAN FOR SERVICE.



REGULATED DC POWER SUPPLY WITH CIGARETTE JACK MODEL: PSL92X

INSTRUCTION MANUAL



www.pyleaudio.com

GENERAL SPECIFICATIONS.

ELECTRICAL:

(A-1) INPUT RATING.

INPUT VOLTAGE: 105-125 VAC(115V NORMAL). INPUT LINE FREQUENCY: 60Hz.

INPUT POWER: 70W MAX.

(A-2) OUTPUT RATING.

OUTPUT VOLTAGE: 13.8VDC ± 0.3V OUTPUT CURRENT: CONT./MAX. 5/7A

OUTPUT RIPPLE: 150mV RMS

(A-3) REGULATION

LOAD REGULATION: 2.5%(280mV P-P)MAX.

(A-4) PROTECTION.

INPUT LINE PROTECTION: GLASS TUBE FUSE. 1.5A/250V OVER-LOAD PROTECTION: 7A + 10% \sim 15% (AUTO RESET) OVER TEMPERATURE PROTECTION

(A-5) EFFICIENCY: 60% MIN.

(A-6) DESIGN: LINEAR TYPE

(A-7) OPERATING TEMPERATURE: 0 TO +40 DEG C

(A-8) STORAGE TEMPERATURE: - 25 TO +70 DEG C.

-NOTE- INPUT AT 115VAC AND OUTPUT AT CONT. CURRENT

MECHANICAL:

(B-1) DIMENSIONS: 197mm x 144mm x 80mm. (L x W x H)


(B-2) WEIGHT: 2.1KGS

(B-3) ENCLOSURE: SILVER

(B-4) INPUT CABLE: 18AWG x 2C W/1-15P PLUG. SPT-2 6FT

(B-5) OUTPUT TERMINAL: BINDING POST, 10A/125V

(B-6) POWER SWITCH: ILLUMINATED, 15A/125VAC.

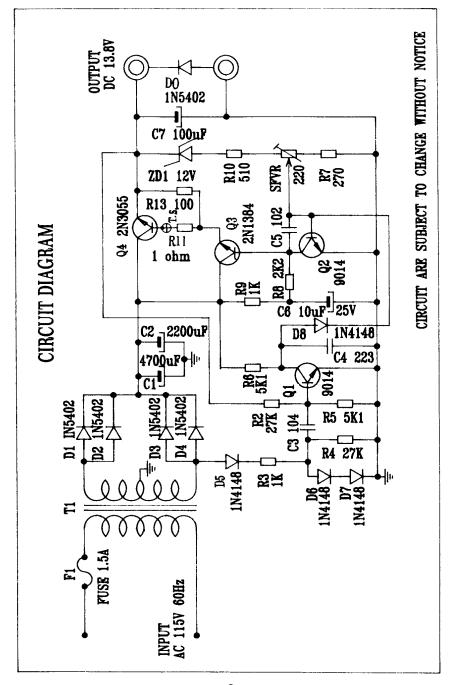

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com