




## INSTALLATION INSTRUCTION STANDARD, PERFORMANCE UPGRADE AND HURRICANESHIELD® IMPACT RESISTANT FOR FIXED FRAME DIRECT SET WINDOWS

*Instrucciones español en el reverso.*

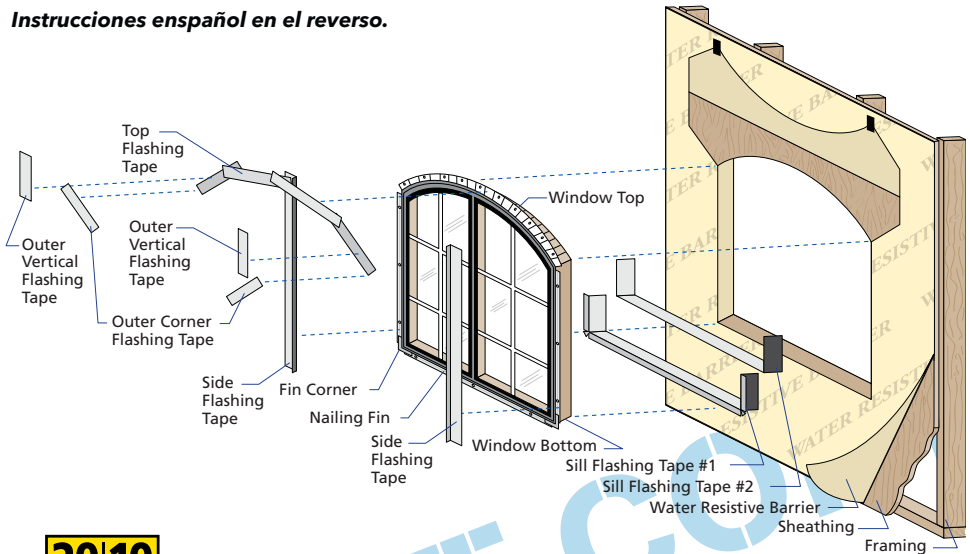







Always read the Pella® Limited Warranty before purchasing or installing Pella products. By installing this product, you are acknowledging that this Limited Warranty is part of the terms of the sale. Failure to comply with all Pella installation and maintenance instructions may void your Pella product warranty. See Limited Warranty for complete details at <http://warranty.pella.com>.








### Installation Instructions for Typical Wood Frame Construction.

These instructions were developed and tested for use with typical wood frame wall construction in a wall system designed to manage water. These instructions are not to be used with any other construction method. Installation instructions for use with other construction methods, multiple units or bow and bay windows, may be obtained from Pella Corporation, a local Pella retailer, or by visiting <http://www.pella.com>. Building designs, construction methods, building materials, and site conditions unique to your project may require an installation method different from these instructions and additional care. Determining the appropriate installation method is the responsibility of you, your architect, or construction professional.

#### YOU WILL NEED TO SUPPLY:

- Cedar or Impervious shims/spacers (12 to 20) 
- 2" galvanized roofing nails (1/4 lb.) 
- Note: Performance Upgrade and HurricaneShield® units require use of installation clips or screws through the frame.
- Closed cell foam backer rod/sealant backer (12 to 30 ft.) 
- Pella® SmartFlash™ foil backed butyl window and door flashing tape or equivalent 
- Pella Window and Door Installation Sealant or equivalent high quality, multi-purpose sealant (1 tube per window) 
- Low expansion, low pressure polyurethane insulating window and door foam sealant - DO NOT use high pressure or latex foams 
- Interior trim and/or jamb extensions (15 to 40 ft.)

#### TOOLS REQUIRED:

- Tape measure 
- Level 
- Square 
- Hammer 
- Stapler 
- Scissors or utility knife 
- Sealant gun 

REMEMBER TO USE APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT.

# 1

## ROUGH OPENING PREPARATION

- A. **Make sure the bottom of the opening is level.**


**Note:** It is critical the bottom is level for the window to be installed correctly.

- B. **Confirm the window will fit in the opening.** Measure all four sides of the opening;

**Standard units:** Opening is to be 3/4" larger than the window in both width and height.



**Performance Upgrade and HurricaneShield:** Opening is to be 1/2" larger than the window in both width and height. On larger openings measure the width and height in several places to confirm the header or studs are not bowed.

**Note:** 1-1/2" or more of solid wood blocking is required around the perimeter of the opening. Fix any problems with the rough opening before proceeding.




5th cut:  
Cut down to meet the 6" 45° cut on each corner.

4th cut:  
Make a 6" cut up from each top corner at a 45° angle to allow the water resistant barrier to be lapped over the fin at the head of the window.




- C. **Cut the water resistant barrier (1C).** See page 10 for additional cutting patterns.
- D. **Fold the water resistant barrier (1D).** Fold side flaps into the opening and staple to inside wall. Fold top flap up and temporarily fasten with flashing tape.
- E. **Apply sill flashing tape #1.** Cut a piece of flashing tape 12" longer than the opening width. Apply at the bottom of the opening as shown (1E) so it overhangs 1" to the exterior.




**Note:** The tape is cut 12" longer than the width so that it will extend 6" up each side of the opening.

- F. **Tab the sill flashing tape and fold.** Cut 1" wide tabs at each corner (1/2" from each side of corner) (1F). Fold tape to the exterior and press firmly to adhere it to the water resistant barrier.



- G. **Apply sill flashing tape #2.**


Cut a piece of flashing tape 12" longer than the opening width. Apply at the bottom, overlapping tape #1 by at least 1". Do not allow the tape to extend past the interior face of the framing (1G).



**Note:** The flashing tape may not fully cover the framing members.

# 2 SETTING AND FASTENING THE WINDOW

- A. **Install and level shims.** Place 1" wide by 1/4" thick shims on the bottom of the opening, 2-1/2" from each side, beneath transition bars and mullion joints. Keep shims back 1/2" from interior face of window. Adjust shims as necessary to ensure the sill is level. Once level, attach shims to prevent movement.





**Note:** Improper placement of shims may result in bowing the bottom of the window.

- B. **Remove plastic wrap and cardboard packaging from window.**


**Note:** If grilles are removed from the window at this time, label them and store them in a protected area.

- C. **Units with fold-out installation fins:** Fold out fin to 90°. On units with pre-applied fin corners, be careful not to remove or tear the fin corners.

**Note:** If the fin is not at 90°, the window will not line up correctly on the interior.





CIRCLEHEAD WITH FLEXIBLE FIN




**Note:** Performance Upgrade and HurricaneShield® require use of installation clips or screws through the frame. Use of fins in addition to clips or screws is optional.

- D. **Windows using Installation Clips:** Install installation clips. If installation fins are used; place the clip so that the lip is facing up and against the installation fin, at the locations shown in the placement diagram. If installation fins are not used, the clip lip faces down and is inserted into a groove in the frame. Secure the clip by driving #6 x 5/8" corrosion resistant screws through the outer two holes of the three holes shown.

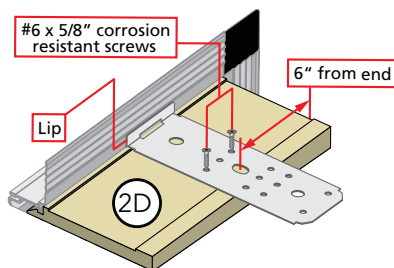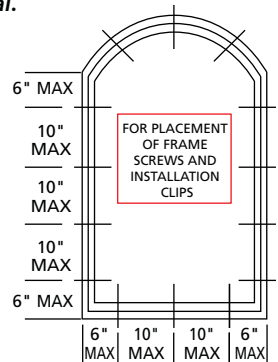

- E. **Windows using frame screws:** Pre-drill installation screw holes. On the room side of the window, drill 13/64" diameter clearance holes through the frame as shown on the placement diagram. Space the holes a maximum of 6" from each end and a maximum of 10" on center on the head, jamb and sill.



## 2 SETTING AND FASTENING THE WINDOW (CONTINUED)


**TWO OR MORE PEOPLE WILL BE REQUIRED FOR THE FOLLOWING STEPS.**

- F. **Insert the window from the exterior of the building.** Place the bottom of the window on the spacers at the bottom of the opening, then tilt the top into position. Center the window between the sides of the opening to allow clearance for shimming.

**Windows with nail fin:** Insert one roofing nail in the first hole from the corner on each end of the top nailing fin. These are used to hold the window in place while shimming it plumb and square.


**Windows using screws through the frame:** Position the window so the exterior face of the frame extends  $3/4"$  on the exterior wall material to allow for the application of backer rod and sealant (See illustrations in Step 7 for sealant details). Center window between the sides of the opening to allow clearance for shimming and insert one  $\#10 \times 3-1/2"$  screw into each of the top clearance holes. This will hold the window in place while shimming it plumb and square.

**Window with Installation Clips:** Position the window so the exterior face of the frame extends  $3/4"$  on the exterior wall material to allow for the application of backer rod and sealant (See illustrations in Step 7 for sealant details). Center window between the sides of the opening to allow clearance for shimming and insert one  $\#6 \times 1-1/2"$  or longer screw into one hole in each of the top corner clips. This will hold the window in place while shimming it plumb and square. Note: For masonry openings use  $3/16" \times 1-1/2"$  masonry screw.

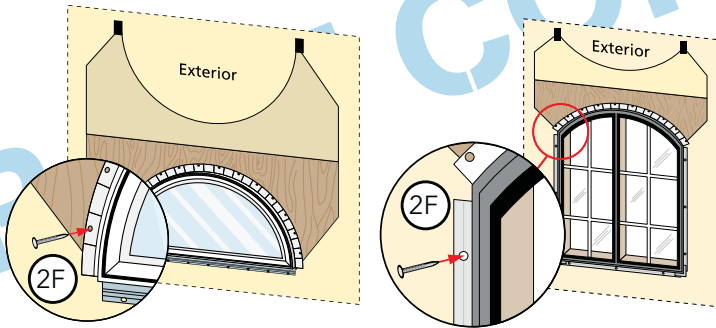

- G. **Plumb and square the window.** Place shims  $1"$  from the bottom and top of the window between the window and the sides of the opening. Keep shims back  $1/2"$  from the interior face of the window. Adjust the shims as required to plumb and square the window in the opening. If the frame height exceeds  $53"$ , place shims at the midpoint of the window sides.

**Note: DO NOT shim above the window or in the space between the spacers at the bottom of the window. DO NOT over shim.**

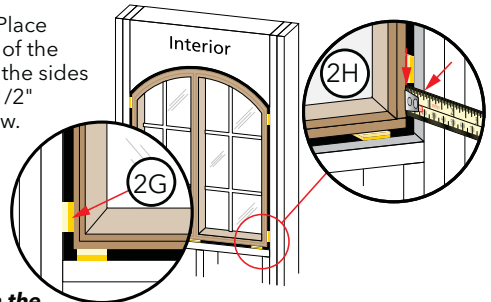

- H. **Check the interior reveal.** Make sure the measurement from the interior face of the window to the interior face of the wall is equal at several points around the window.

**Note: If the dimensions are not equal, check to make sure the fins are folded out to  $90^\circ$  at all points.**

## 2 SETTING AND FASTENING THE WINDOW (CONTINUED)


- I. **Fasten the window to opening.** On windows with a fixed extruded fin, drill 1/8 diameter holes in the fin every 12".

### Windows with Nail Fin:

- J. **Drive a 2" galvanized roofing nail** into each of the pre-punched and pre-drilled holes.

**For flexible fin:** Drive nails until the head contacts the fin, however do not sink the head. This allows for movement of building materials.


**Note: Make sure all fin corners are lying as flat as possible.**

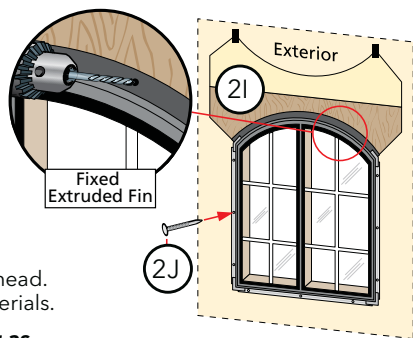

## 3 INTEGRATING THE WINDOW TO THE WATER RESISTIVE BARRIER

**Note: Step 3 applies to windows with installation fins used in combination with a water resistive barrier.**


- A. **Units that do not have pre-applied fin corners:** Cut four pieces of flashing tape 1-1/2" long. Apply one piece of flashing tape to each end of the sill fin so that it extends 1-1/2" past the end of the sill fin. Apply one piece of flashing tape to the bottom end of each flexible fin, beginning 1-1/2" from the end of the fin, and lapping over the flashing tape that extends from the end of the sill fin.

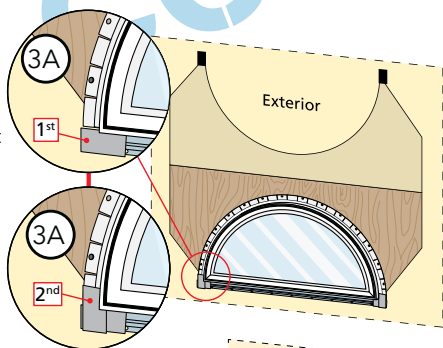

- B. **Apply side flashing tape.** Cut two pieces of flashing tape 4" longer than the frame height of the window. Apply one piece 1/2" up onto the frame cladding over the nailing fin and onto the water resistive barrier to each side. The tape should extend 2" above the top of the window and 2" below the bottom of the window. Press the tape down firmly while folding down the excess tape at the top and bottom of the window.


**Note: DO NOT tape or seal the bottom nailing fin.**

- C. **Apply top flashing tape.** Cut a piece of flashing tape long enough to go across the top of the window and extend at least 1" past the side flashing tape on both sides. Apply the tape 1/2" up onto the frame cladding over the top nailing fin as shown. Fold the overlapping tape down, and press all tape down firmly.

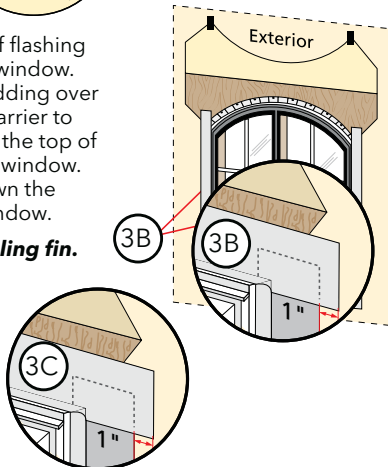

### 3 INTEGRATING THE WINDOW TO THE WATER RESISTIVE BARRIER (CONTINUED)

- C1. **Apply top flashing tape to circle top windows.** Several pieces of flashing tape will be needed to cover the top fin. Start taping from the sides of the window working toward the peak. To determine the length of cuts, hold the tape along the radius, and cut the tape just past where it leaves the top fixed extruded fin or for the flexible fin, just past the flexible weather strip. The top tape must overlap the one beneath it in order to divert water properly. The sharper the arc of the window, the shorter the pieces of tape will be.

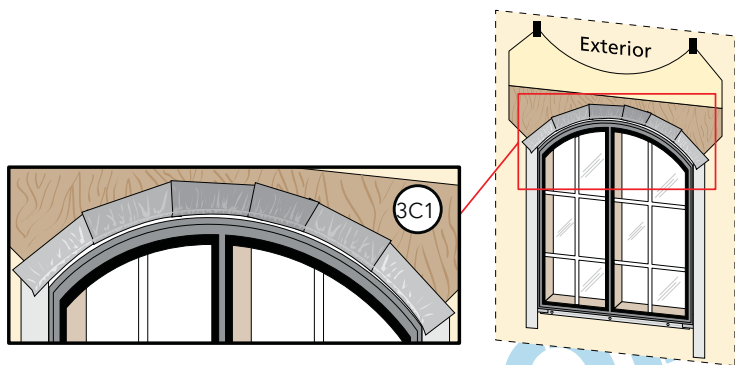


- C2. **Apply top flashing tape to an angle top window 1/2" up onto the frame cladding, over the top fin onto the sheathing.** On the short side of a trapezoid window, do not allow the side flashing tape to extend higher than what the top tape will cover. Fold the overlapping tape down, and press all tape down firmly.

- D. **Fold down top flap of water resistive barrier (3D).**

- E. **Apply flashing tape to diagonal cuts.** Cut pieces of flashing tape at least 1" longer than the diagonal cuts in the water resistive barrier. Apply the tape covering the entire diagonal cut in the water resistive barrier at both upper corners of the window. If vertical cuts were also made, apply flashing tape to them in the same manner.

**Note: The top tape must overlap the tape below it to divert water properly. Be sure to overlap the top corners (3E).**

**Note: If installing the window using installation clips, proceed to Step 5 - Installation Clip Method.**

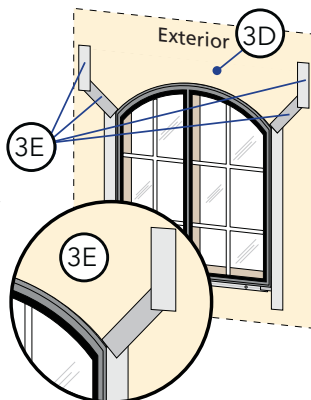


## 4 SECURING THE WINDOW

- A. **Install a #10 x 3-1/2" corrosion resistant wood screw** into each pre-drilled screw hole.

**Note: Minimum 1-1/4" embedment into the wall framing is required.**


**Proceed to Step 6.**

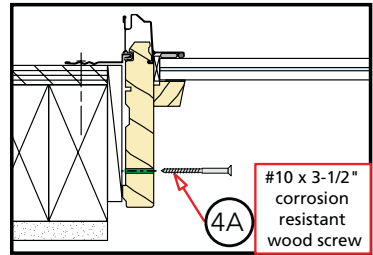

## 5 INSTALLATION CLIP METHOD

- A. **Fasten the window to the opening** by driving two #6 x 1-1/2" or longer corrosion resistant screws into the pre-punched holes in the clips. If clips are bent and fastened to the interior stud/block, install the screws as close to the bend as possible.

**Note: DO NOT shim above the window.**

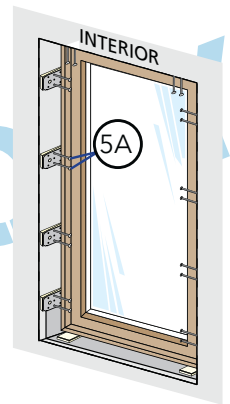


## 6 INTERIOR SEAL

**Caution: Ensure use of low pressure polyurethane window and door insulating foams and strictly follow the foam manufacturer's recommendations for application. Use of high pressure foams or improper application of the foam may cause the window frame to bow and hinder operation.**

- A. **Apply insulating foam sealant.** From the interior, insert the nozzle of the applicator into the space between the window and the rough opening approximately 1" past the edge of the frame (and past the jamb extensions) and apply a 1" deep bead of foam. This will allow room for expansion of the foam and will minimize squeeze out. Apply sealant across the interior surface of the shims to create a continuous seal. Follow foam manufacturer's instructions.

**Note: DO NOT place any foam between jamb extensions and the rough opening.**


**Note: DO NOT completely fill the space from the back of the fin to the interior face of the opening.**



# 7 SEALING THE WINDOW TO THE EXTERIOR WALL CLADDING

When applying siding, brick veneer or other exterior finish material, leave adequate space between the window frame and the material for sealant. Refer to the illustration that corresponds to your finish material.

**Note:** The sealant details shown are standard recommendations from the sealant industry. Contact your sealant supplier for recommendations and instructions for these and any other applications.

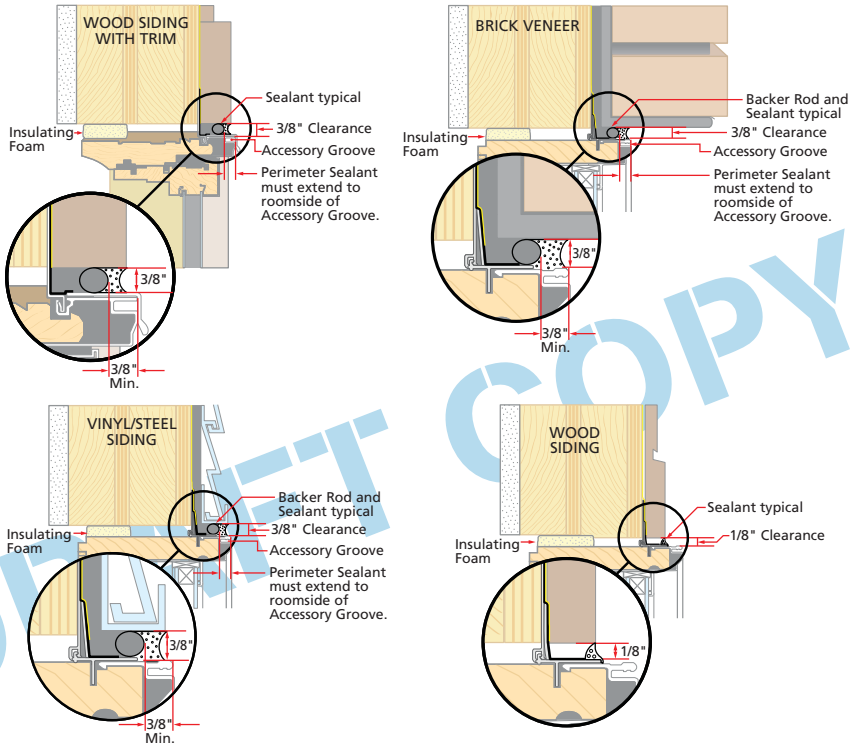




# 7 SEALING THE WINDOW TO THE EXTERIOR WALL CLADDING (CONTINUED)

- A. **Insert closed cell foam backer rod** into the space around the window so there is approximately 3/8" clearance between the backer rod and the exterior face of the window.


**Note: Backer rod adds shape and depth for the sealant line.**



- B. **Apply a bead of high quality exterior grade sealant** to the entire perimeter of the window.

**Note: For wood siding applications, when using the flexible fin, ensure the sealant bead covers the exterior edge of the fin weather-strip.**

- C. **Shape, tool and clean excess sealant.** When finished, the sealant should be the shape of an hourglass.

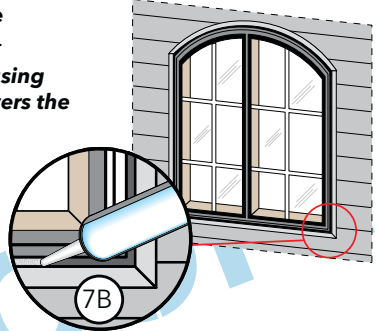

**Note: This method creates a more flexible sealant line capable of expanding and contracting.**

## INTERIOR FINISHING


If products cannot be finished immediately, cover with clear plastic to protect from dirt, damage and moisture. Remove any construction residue before finishing. Sand all wood surfaces lightly with 180 grit or finer sandpaper. DO NOT use steel wool. BE CAREFUL NOT TO SCRATCH THE GLASS. Remove sanding dust.

**Note: To maintain proper product performance do not paint, finish or remove the weather-stripping, mohair dust pads, gaskets or vinyl parts. Air and water leakage will result if these parts are removed. After finishing, allow venting windows and doors to dry completely before closing them.**

Pella Corporation is not responsible for interior paint and stain finish imperfections for any product that is not factory-applied by Pella Corporation. Use of inappropriate finishes, solvents, brickwash, or cleaning chemicals will cause adverse reactions with window and door materials and voids the Limited Warranty.

For additional information on finishing see the Pella Owner's Manual or go to [www.pella.com](http://www.pella.com).

## Additional cutting patterns

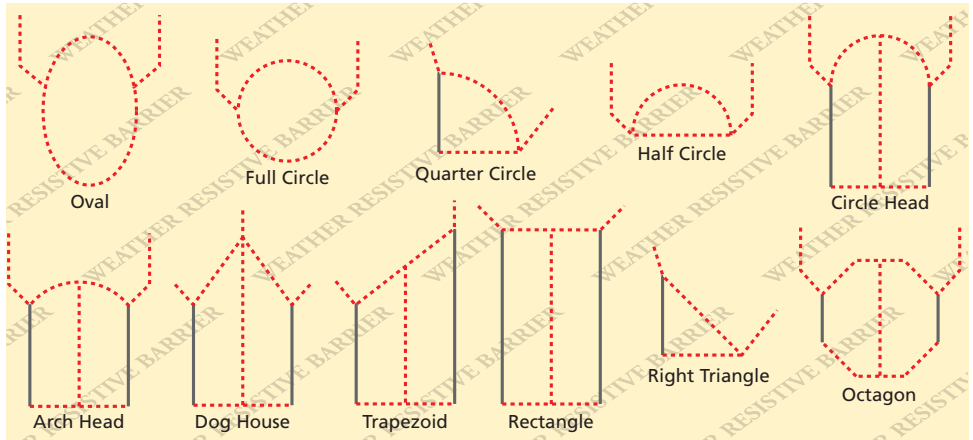

## EXTERIOR FINISH

The exterior frame and sash are protected by aluminum cladding with our EnduraClad® or EnduraClad Plus baked-on factory finish that needs no painting. Clean this surface with mild soap and water. Stubborn stains and deposits may be removed with mineral spirits. **DO NOT** use abrasives. **DO NOT** scrape or use tools that might damage the surface.

Use of inappropriate finishes, solvents, brickwash or cleaning chemicals will cause adverse reactions with window and door materials and voids the Limited Warranty.

## CARE AND MAINTENANCE

Care and maintenance information is available in the Pella Owner's Manual. You can obtain an owner's manual by contacting your local Pella retailer. This information is also available on [www.pella.com](http://www.pella.com).

## IMPORTANT NOTICE

Because all construction must anticipate some water infiltration, it is important that the wall system be designed and constructed to properly manage moisture. Pella Corporation is not responsible for claims or damages caused by anticipated and unanticipated water infiltration; deficiencies in building design, construction and maintenance; failure to install Pella products in accordance with Pella's installation instructions; or the use of Pella products in wall systems which do not allow for proper management of moisture within the wall systems. The determination of the suitability of all building components, including the use of Pella products, as well as the design and installation of allow for proper management of moisture within the wall systems. The determination of the suitability of all building components, including the use of Pella products, as well as the design and installation of flashing and sealing systems are the responsibility of the Buyer or User, the architect, contractor, installer, or other construction professional and are not the responsibility of Pella.

Pella products should not be used in barrier wall systems which do not allow for proper management of moisture within the wall systems, such as barrier Exterior Insulation and Finish Systems, (EIFS) (also known as synthetic stucco) or other non-water managed systems. Except in the states of California, New Mexico, Arizona, Nevada, Utah, and Colorado, Pella makes no warranty of any kind on and assumes no responsibility for Pella windows and doors installed in barrier wall systems. In the states listed above, the installation of Pella Products in barrier wall or similar systems must be in accordance with Pella's installation instructions.

Product modifications that are not approved by Pella Corporation will void the Limited Warranty.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>