

Philips SILHOUETTE® Series T5 Circular & High Output Circular Fluorescent Lamps

Ideal for offices and commercial establishments where smaller, more appealing fixture designs are required

SILHOUETTE® SERIES

Powerful, ultra-slim circular lamps

Philips SILHOUETTE® Series T5 Circular and HO Circular lamps are ultra-slim with improved color rendering, higher efficacy, and longer life. T5 HO circular lamps offer extraordinary light output.

Slim profile lamp and ballast

- Design flexibility
- Improved optical control
- Fixtures can be 45% smaller than standard T9 circline systems

Better for the environment

- · Dimmable for additional energy savings
- Energy efficient
- · Less material means less waste
- · Longer life

SILHOUETTE® T5 HO circulars offer 70% more lumens than standard SILHOUETTE® T5 circular lamps

Operates on programmed start ballasts



Philips SILHOUETTE® Series T5 Circular and High Output (HO) Circular Fluorescent Lamps

Ordering, Electrical and Technical Data


| Product Number | Description | Nom. Watts | Bulb | Base | Std. Pkg. Qty. | Color Temp. (Kelvin) | CRI | Outer Diam. (In.) | Rated Av 3-Hour Start ² | g. Life (Hrs) ¹ 12 Hour Start³ | Approx. Initial Lumens ^{4,5} | Design Lumens ⁶ |
|---|-----------------|---------------|------|-------|----------------------|----------------------------|-----|-------------------------|--|---|---|-------------------------------|
| SILHOUETTE™ Series T5 Circular Fluorescent Lamps | | | | | | | | | | | | |
| 16601-7 | TL5C 22W/830 | 22 | T5 | 2GXI3 | 10 | 3000 | 85 | 9 | 16,000 | 20,000 | 1800 | 1530 |
| 14856-9 | TL5C 22W/835 | 22 | T5 | 2GXI3 | 10 | 3500 | 85 | 9 | 16,000 | 20,000 | 1800 | 1530 |
| 16600-9 | TL5C 22W/840 | 22 | T5 | 2GXI3 | 10 | 4000 | 85 | 9 | 16,000 | 20,000 | 1800 | 1530 |
| 16596-8 | TL5C 40W/830 | 40 | T5 | 2GXI3 | 10 | 3000 | 85 | 12 | 16,000 | 20,000 | 3300 | 2805 |
| 14859-3 | TL5C 40W/835 | 40 | T5 | 2GXI3 | 10 | 3500 | 85 | 12 | 16,000 | 20,000 | 3300 | 2805 |
| 16598-4 | TL5C 40W/840 | 40 | T5 | 2GXI3 | 10 | 4000 | 85 | 12 | 16,000 | 20,000 | 3300 | 2805 |
| SILHOUETTE™ Series T5 High Output (HO) Circular Fluorescent Lamps | | | | | | | | | | | | |
| 16593-6 | TL5C 55W/830 | 55 | T5 | 2GXI3 | 10 | 3000 | 85 | 12 | 16,000 | 20,000 | 4200 | 3580 |
| 14862-7 | TL5C 55W/835 | 55 | T5 | 2GXI3 | 10 | 3500 | 85 | 12 | 16,000 | 20,000 | 4200 | 3580 |
| 16592-8 | TL5C 55W/840 | 55 | T5 | 2GXI3 | 10 | 4000 | 85 | 12 | 16,000 | 20,000 | 4200 | 3580 |
| 16372-8 | 1 L3C 35 VV/840 | 22 | 15 | 2GX13 | 10 | 4000 | 85 | 12 | 16,000 | 20,000 | 4200 | 3380 |

- 1) Rated average life is the length of operation (in hours) at which point an average of 50% of a large sample of lamps will still be operational and 50% will not.
- 2) Average life under specified test conditions with lamps turned off and restarted no more frequently than once every 3 operating hours. Lamp life is appreciably longer if lamps are started less frequently.
- 3) Average life under engineering data with lamps turned off and restarted once every 12 operating hours.
- 4) Approximate initial lumens. The lamp lumen output is based upon lamp performance after 100 hours of operating life, when the output is measured during operation on a reference ballast under standard laboratory conditions.
- 5) For expected lamp lumen output, commercial ballast manuufacturers can advise the appropriate ballast factor for each of their ballasts when they are informed of the designated lamp. The ballast factor
- is a multiplier applied to the designated lamp lumen output.

 6) Design lumens are the approximate lamp lumen output at 40% of the lamp's rated average life. This output is based upon measurements obtained during lamp operation on a reference ballast under standard laboratory conditions.

85% Lumen Maintenance

SILHOUETTE® Series T5 Circular and HO Circular Fluorescent Lamp

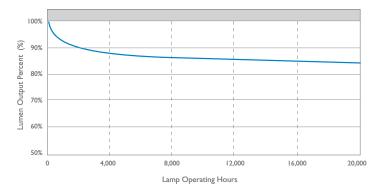

Rated Average Life

SILHOUETTE® Series T5 Circular and HO Circular Fluorescent Lamp





Specifications are subject to change without notice. © 2007 Philips Lighting Company. All rights reserved. Printed in USA 07/07

P-5386-A

www. philips.com

Philips Lighting Company 200 Franklin Square Drive P.O. Box 6800 Somerset, NJ 08875-6800 1-800-555-0050

A Division of Philips Electronics North America Corporation

Philips Lighting 281 Hillmount Road Markham, Ontario Canada L6C 2S3 1-800-555-0050 A Division of Philips Electronics Ltd.

Printed on chlorine free paper from Sappi Fine Paper mills, who are accredited with EMAS environmental certification. Sappi claims that the pulp used in the manufacture of Magno Dull paper is derived from environmentally certified forests. Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com