


Philips
Speaker wire

100 ft
16 gauge

SWA2427W

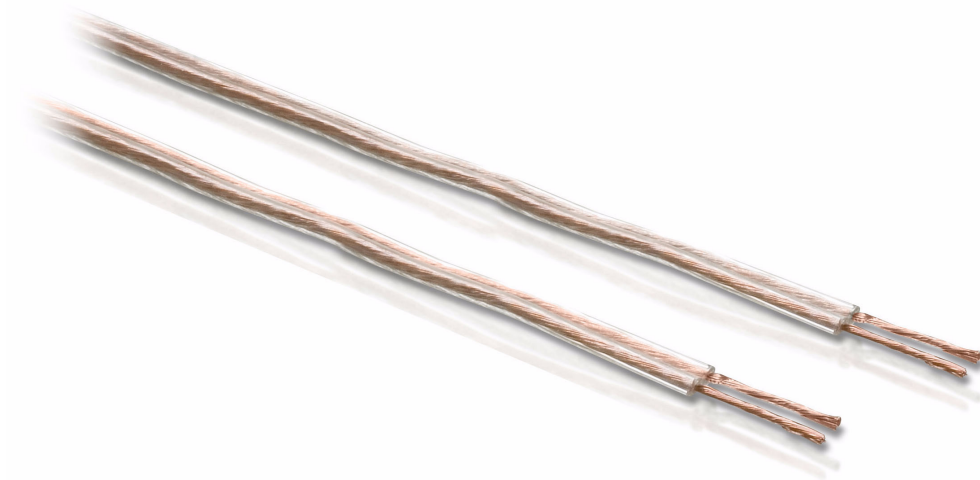

Ensure a reliable connection

with this speaker wire

Depend on this speaker wire to provide you with a reliable audio connection between your speakers and tuner.

Enjoy good audio quality

- Crafted with quality construction
- Copper clad aluminum conductor for reliable signal transfer

Enjoy extended durability

- Flexible PVC jacket

Environmentally friendly

- Environmentally friendly lead-free construction

PHILIPS
sense and simplicity

Speaker wire
100 ft 16 gauge

Specifications

Inner Carton

- Inner carton (L x W x H): 27.9 x 15.2 x 10.8 cm
- Inner carton (L x W x H): 11 x 6 x 4.25 inch
- Nett weight: 1.433 kg
- Nett weight: 3.16 lb
- Gross weight: 1.642 kg
- Gross weight: 3.62 lb
- Tare weight: 0.209 kg
- Tare weight: 0.46 lb
- GTIN: 2 06 09585 16312 0
- Number of consumer packagings: 2

Outer Carton

- Outer carton (L x W x H): 41.3 x 27.9 x 24.1 cm
- Outer carton (L x W x H): 16.25 x 11 x 9.5 inch
- Nett weight: 8.600 kg
- Nett weight: 18.96 lb
- Gross weight: 10.342 kg
- Gross weight: 22.8 lb

- Tare weight: 1.742 kg
- Tare weight: 3.84 lb
- GTIN: 1 06 09585 16312 3
- Number of consumer packagings: 12

Packaging dimensions

- Packaging dimensions (W x H x D):
12.1 x 12.1 x 9.5 cm
- Packaging dimensions (W x H x D):
4.75 x 4.75 x 3.75 inch
- Nett weight: 0.717 kg
- Nett weight: 1.58 lb
- Gross weight: 0.794 kg
- Gross weight: 1.75 lb
- Tare weight: 0.077 kg
- Tare weight: 0.17 lb
- UPC: 6 09585 16312 6
- Number of products included: 1
- Packaging type: Blister

SWA2427W/27

Product highlights

Flexible PVC Jacket

Flexible PVC jacket provided protection to the delicate core of the cable. It also offers extended durability and ease of installation.

Lead-free construction

Lead-free construction of environmentally friendly materials.

Quality construction

Quality construction uses only top grade materials to create products of extended durability.

Copper clad aluminum conductor

This copper aluminum clad conductor provides optimal accuracy in signal transfer with minimal resistance.



Issue date 2008-09-24

Version: 1.1.3

12 NC: 8670 000 47882
UPC: 6 09585 16312 6

© 2008 Koninklijke Philips Electronics N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips
Electronics N.V. or their respective owners.

www.philips.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>