


Philips
HDMI cable

1,5 m

SWV6370

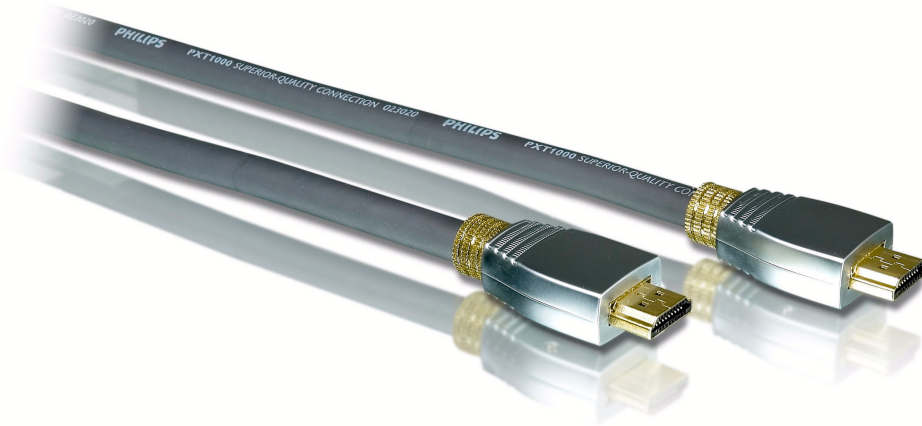

Enjoy the ultimate viewing experience

with this premium a/v cable

Take your components to optimum performance. This top of the line cable offers the best connection for transferring audio and video signals between components.

Enjoy better picture quality

- 24 carat gold-plated connectors optimize signal
- 99.97% Oxygen-Free Copper (OFC)
- High-bandwidth Digital Content Protection

Protects against signal loss

- 100% aluminum shielding
- Copper braided shielding
- Foam Polyethylene (FPE) Dielectric

Easy installation

- Non-slip ergonomic grip for easy use
- Plug and play for easy use

Enjoy extended durability

- Heavy-duty brass shell for extended durability
- Super pliable jackets for outstanding flexibility
- Reliable metal strain relief

PHILIPS
sense and simplicity

HDMI cable
1,5 m

Specifications

Packaging Data

- Quantity: 1
- EAN/UPC/GTIN: 87 10895 95424 2
- Gross weight: .22 kg
- Tare weight: .08 kg
- Net weight: .14 kg
- Length: 230 mm
- Width: 165 mm
- Height: 60 mm

Outer Carton

- EAN/UPC/GTIN: 87 10895 97678 7
- Quantity: 4
- Gross weight: 1.41 kg
- Tare weight: .85 kg

- Net weight: .56 kg
- Length: 250 mm
- Width: 235 mm
- Height: 195 mm

Inner Carton

- EAN/UPC/GTIN: 87 10895 97677 0
- Gross weight: .56 kg
- Height: 175 mm
- Length: 230 mm
- Net weight: .28 kg
- Quantity: 2
- Tare weight: .28 kg
- Width: 105 mm

SWV6370/93

Product highlights

24 carat gold-plated connector

24 carat gold-plated connectors ensure the best signal quality for your components.

99.97% OFC solid conductor

99.97% Oxygen-free copper (OFC) cable core provides optimum signal quality.

HDPC Compliant

High-bandwidth Digital Content Protection (HDPC) allows you to play protected content media such as movies and concerts. It checks the signal to prevent piracy, allowing only legal copies of content to display.

100% aluminum shielding

This protective layer of aluminum guards against electromagnetic interference for improved signal quality.

Copper braided shielding

This protective layer of copper blocks radio frequency interference for improved signal quality.

FPE Dielectric

Foam Polyethylene (FPE) dielectric is a superior insulation material that protects against signal loss.

Easy grip

This non-slip grip makes connecting your components easy and ergonomically comfortable.

Plug and play

Plug and play offers easy installation of components without time-consuming installations.

Heavy-duty brass shell

The heavy-duty brass shell protects the internal connection of the cable. It ensures durability and the reliability of your connection.

Super pliable jackets

Super pliable PVC jackets are abrasion-resistant for outstanding flexibility and protection against everyday wear and tear.

Metal strain relief

Full metal connector ensures extended durability by preventing damage during use and installation.



Issue date 2008-04-18

Version: 4.0.7

12 NC: 9082 100 07583
EAN: 87 10895 95424 2

© 2008 Koninklijke Philips Electronics N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips
Electronics N.V. or their respective owners.

www.philips.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>