



The EL2 Series is an architectural grade two-head emergency light ideal for either wall or ceiling mounted applications. This product features innovative architectural styling and technologically advanced features.

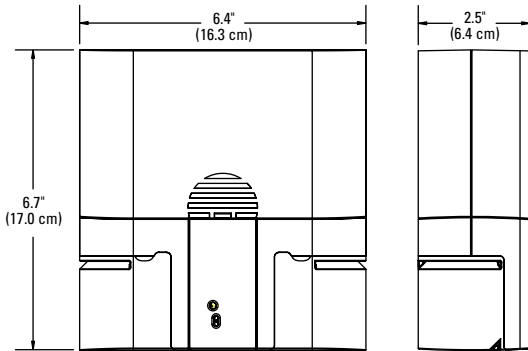

Lamp Head Photometrics (per Lamp)

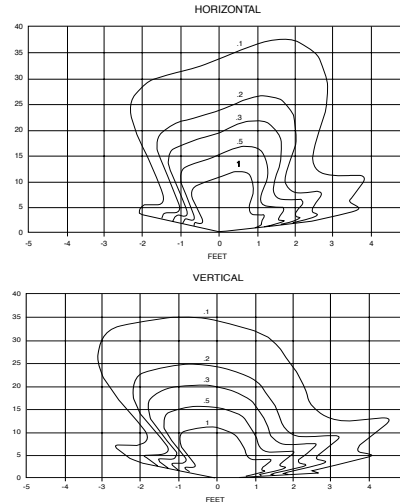

Complete Fixture consists of unit and two lamp heads. Lamp Head Photometrics (per lamp)

How to Specify:

<div style="border: 1px solid black; padding: 2px; width: 30px; display: inline-block;">EL2</div>	<div style="border: 1px solid black; width: 30px; height: 15px; display: inline-block;"></div>	<div style="border: 1px solid black; width: 30px; height: 15px; display: inline-block;"></div>	<div style="border: 1px solid black; width: 30px; height: 15px; display: inline-block;"></div>
Model Series	Enclosure Color	Battery	Options
EL2	W = White B = Black	N = NiMH	I = Infrared Remote Sensor ¹ TD = Time Delay

Features

- 1. Illumination:** Two rotatable reflector assemblies with adjustable beam patterns. Unit includes 6 VDC, 6 watt halogen lamps housed in impact resistant lamp covers.*
- 2. Housing:** Impact resistant, injection molded UL 94-5VA flame retardant thermoplastic housing. UV-stabilized to resist discoloration. White finish is standard, black is optional.
- 3. Mounting:** Unit is either ceiling or wall mountable.
- 4. Standard Self-Testing/Self-Diagnostics:** Unit runs an internal test every five seconds for secondary voltage, charge current, battery voltage, and LED illumination. Performs automatic 1 minute discharge test every 30 days and 30 minute discharge test every 180 days meeting and exceeding UL 924 and NFPA 101 requirements. The Infrared Option allows a remote control to initiate a 5 second and 30 minute self-test in addition to the standard 1 minute and 90 minute manual test capability.
- 5. Electronics:** 120/277 VAC dual voltage input. Microprocessor controlled charge, transfer and monitoring system. Charging system is complete with low voltage disconnect, AC lockout, and brownout protection. Includes an AC indicator/systems status lamp and manual test switch.
- 6. Battery:** Maintenance free, sealed nickel metal hydride battery with 10 year life and an operating temperature between 14°F (-10°C) and 113°F (45°C). NiMH battery is a non-toxic, environmentally friendly product which is recyclable.
- 7. Input Power Requirements:**
120 VAC- .103 amps, 11.3W,
277 VAC- .044 amps, 11.6W

Warranty

Electronics: 3 years, Battery: 5 years full, 5 years pro-rata

Code Compliance

U.L. 924 listed, NFPA 101.

Options

I = Infrared Remote Sensor¹
TD = Time Delay

Note:

1. For use with remote control which is ordered separately. Item number: IRemote

Accessories

IREMOTE - Infrared Remote Control

*Replacement Lamping: No. 784, T2.25, G-4 Two Pin Base, 6 Volt, 6 Watt Miniature Lamp.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • B0308

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>