

A/V Components 2008-2009

Indulge All Your Senses with the Ultimate Home Entertainment Experience

Pioneer

PIONEER CORPORATION

4-1, Meguro 1-chome, Meguro-ku, Tokyo 153-8654, Japan http://www.pioneer.jp

PIONEER ELECTRONICS ASIACENTRE PTE. LTD. (Co. Reg. No.: 199203130M)

253 Alexandra Road, #04-01, Singapore 159936 Service Hotline: (65)-6472-7555 http://www.pioneer.com.sg

PIONEER TECHNOLOGY (MALAYSIA) SDN. BHD.

16th Floor, Menara Uni. Asia, 1008 Jalan Sultan Ismail, 50250 Kuala Lumpur, Malaysia Service Hotline: (60)-3-2697-2920 http://www.pioneermalaysia.com.my

PIONEER (HK) LIMITED

Suites 901-906, 9/F, World Commerce Centre, Harbour City, 11 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel.: (852)-2848-6488 Fax: (852)-2530-4896 http://www.nigneerhoogkong.com.hk

Published by Pioneer Corporation. Copyright © 2008 Pioneer Corporation. All rights reserved. Note: Specifications and design subject to change without notice. Printed on Recycled Paper. 3105H 08 A/V COMPONENTS (PAC) 25,000-CCI 05-08 Printed in Japan





Seamless Flow of Entertainment — No Missing Link Here





Pioneer proudly presents a range of components that reaches out with significantly enhanced connections. The VSX-1018AH A/V receiver offers the equivalent of the original sound track with Dolby TrueHD and DTS-HD Master Audio — the highest quality audio formats available — to complement the high definition videos provided by Blu-ray discs. The A/V receiver lineup includes 1080p transfer feature via HDMI output, and enhanced USB connection for digital audio transfer from iPod and USB devices. By connection with DV-610AV or DV-410V DVD player and a flat screen TV, HDMI direct digital transfer ensures lossless, high-resolution picture from source to screen. The DVR-660H/DVR-560H DVD recorders even let you enjoy DivX and other audio and video files from your PC, by a simple USB connection. Feel the new world of digital entertainment at your fingertips.

Feature Highlights of the New A/V Receivers

Pioneer presents an advanced lineup of A/V receivers for creating the next generation home theatre. High-definition Blu-ray has brought a new dimension to audio as well as visual potentials. With Pioneer's new A/V receivers, you can enjoy the benefits of the new generation audio formats, such as DTS-HD Master Audio and Dolby TrueHD, or play music from iPod and other portable digital devices


Innovations for Superior Sound—

Phase Control — An Innovation for Multi-Channel Sound **Compensation (VSX-1018AH, VSX-918V, VSX-818V, VSX-518)**

When amplifying multi-channel audio signals, receivers use Low Pass Filter (LPF) for processing low-frequency signals for subwoofer output. This extra process causes "phase lag", or approximately 5 msec delay of low-frequency signals with respect to those of main channels. The delayed bass affects the quality of main-channel sound and makes the sound lack synchronisation

Pioneer's latest A/V receivers incorporate original Phase Control technologies, which apply a new bass management system to effectively compensate for the phase lag between subwoofer channel and the main els. This significantly improves the multi-channel sound without any extra operation.

ates for the Delay of Low-Frequency So



Create an Ideal Acoustic Environment with Ease — with MCACC (Multi-Channel Acoustic Calibration System) (VSX-1018AH, VSX-918V, VSX-818V)


MCACC allows you to duplicate the acoustic environment of the mixing studio, where recordings ndtracks are mixed and mastered. With the Pioneer A/V receivers, the system — complete with a microphone — compensates for

differences in speaker size, speaker level, and speaker distance, and equalises response with 9-Band (VSX-1018AH) or 5-Band (VSX-918V, VSX-818V) EQ, all





Calibration



Moreover, the VSX-1018AH has a double expanded range for acoustic measurements from 0 to 160 msec including the direct sound area. You can make automatic or manual selection of the equalisation point for more precise acoustic adjustments suited to your room environment.



USB Connection for iPod and USB Devices (VSX-1018AH, VSX-918V,

You can easily enjoy music from iPod and other USB devices by plugging the cable into the front USB terminal. The lossless digital transfer provides highquality sound for your music. Your iPod or USB device can be operated with the remote control and OSD display.

* iPod is a trademark of Apple Computer, Inc., registered in the U.S. and other countries.




Auto Level Control Volume Management System (VSX-1018AH, VSX-918V, VSX-818V, VSX-518)

The new feature equalises volume level differences between tracks when playing from iPod or other portable audio players. The playback volume is maintained at a consistent level, so there is no need to make adjustments for each song




iPod

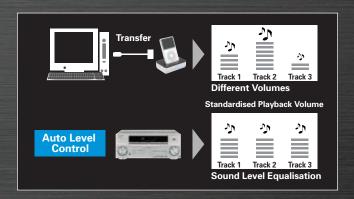

Advanced Sound Retriever (Restores the quality of compressed audio) (VSX-1018AH, VSX-918V, VSX-818V, VSX-518)

The units come with the Advanced Sound Retriever, which significantly improves the sound quality of compressed audio — such as WMA, MPEG-4 AAC, and MP3 — to the level of CD sound. This Pioneer-exclusive technology applies a special algorithm to restore the signals in barely audible ranges, which are eliminated during the compression process.

Advanced Sound Retriever Restoration Image



VSX-1018AH-S Advanced Statement of the s

















A THX Select2 Plus certified 7.1-channel A/V receiver featuring DTS-HD/Dolby TrueHD new generation audio formats, 180 W x 7ch power, Phase Control, Advanced Sound Retriever, Advanced MCACC, HDMI repeater, USB Memory Audio Ready, and iPod® Digital Playback (Made for iPod)

New Generation Audio Formats

▶ DTS-HD/Dolby TrueHD decoders

Pioneer-Exclusive Innovations

- ▶ Phase Control (Bass management system ensures precision low frequency output)
- ▶ Advanced MCACC setup with 9-band EQ
- ▶ Advanced Sound Retriever (for enhanced PC and portable audio)
- ▶ Standing Wave Control
- ▶ Front Stage Surround Advance
- ▶ Auto Level Control
- Advanced Direct Energy Power Amplifier

Features for Superior Sound Quality

- Maximum power (6 ohms): 180 W x 7ch
- Digital Core Engine with Freescale 400MIPS Processing DSP • 192 kHz/24-bit DAC

Surround Sound Technologies

- ▶ THX Select2 Plus certified • DTS-ES/DTS 96/24/Dolby Digital EX/Dolby Digital Plus decoders
- WMA9 Pro decoder
- · Audio delay for adjusting Lip Sync (0-200 ms)
- Dialogue Enhancement
- Stream Direct (for pure and unprocessed digital sound)

Enhanced Convenience


- ▶ HDMI repeater (2 in/1 out), x.v.Colour, Deep Colour compatible
- ▶ iPod player digital direct via USB
- ▶ USB memory audio ready (USB Host function)
- ▶ Digital video converter (up to HDMI)
- ▶ KURO LINK
- SR+ terminal (Control your A/V receiver via Pioneer plasma TV remote
- * x.v.Colour is a trademark of Sony Corporation.



HDMI with Deep Colour (VSX-1018AH)

The VSX-1018AH supports Deep Colour with ultra-high colour depth of up to 36 bit, allowing smooth colour transitions, finest colour gradation steps, and a dramatically improved contrast ratio.





New Generation Audio Formats DTS-HD Master Audio (VSX-1018AH)

The VSX-1018AH features DTS-HD Master Audio **dts**+D decoder for playing the highest quality audio format. With DTS-HD Master Audio, you can enjoy sound that is bit-for-bit identical to the studio master. DTS-HD Master Audio delivers audio at extremely high variable bit rates of 24.5 Mbps, which far exceeds standard DVDs. DTS-HD Master Audio offers movies and music in the pure, original state as intended by the artists.

* DTS is a registered trademark & the DTS logo and Symbol are trademarks of DTS, Inc.

Dolby TrueHD (VSX-1018AH)

The VSX-1018AH comes with Dolby TrueHD decoders. This new audio format delivers sound that is on par with the original soundtrack, letting you experience the world of true high-definition entertainment from Blu-ray Discs. With lossless encoding in up to 18 Mbps bit rate, Dolby TrueHD creates a synergy with high-definition video to offer you a home theatre experience

* Dolby, Dolby TrueHD, Pro Logic II, Dolby Digital EX, and the double-D symbol are registered trademarks of Dolby Laboratories.

Home Theatre Sound-

THX Select2 Plus Certified (VSX-1018AH)

THX is a Lucasfilm Ltd. programme created to achieve maximum accuracy in the reproduction of movie sound. The VSX-1018AH has adhered to rigorous guidelines for sound purity, power output and processing capabilities required for the certification. The latest THX Select2 Plus certification offers a wide array of listening modes for enhanced entertainment, delivering sounds just as they were mixed in the studio, regardless of volume level * The THX logo is a trademark of THX Ltd., which may be registered in some

















A 5-channel A/V receiver featuring 160 W x 5ch power, Phase Control, Advanced Sound Retriever, Auto MCACC with 5-band EQ, Front Stage Surround Advance, HDMI repeater, and iPod® Digital Playback (Made for iPod)

VSX-818V-K(-S) WHOLEST PROLOGICAL PORT OF THE PROLOGICAL PROLOGICA PROLOGICA PROLOGICA PROLOGICA PROLOGICA PROLOGICA PRO

A 5-channel A/V receiver featuring 160 W x 5ch power, Phase Control, Advanced Sound Retriever, Auto MCACC with 5-band EQ, Front Stage Surround Advance, HDMI switching, and iPod® Digital Playback (Made for iPod)

Pioneer-Exclusive Innovations

- ▶ Phase Control (Bass management system ensures precision low frequency output)
- ▶ Auto MCACC setup with 5-band EQ
- Advanced Sound Retriever (for enhanced PC and portable audio)
- ▶ Front Stage Surround Advance
- ▶ Auto Level Control
- · New Pioneer Hybrid Amplifier Design II (for audiophile sound reproduction)

Features for Superior Sound Quality

- ▶ Maximum power (8 ohms): 160 W x 5ch
- Advanced Digital Core Engine with Freescale 180MIPS 48-bit Processing DSP
- 192 kHz/24-bit DAC

Surround Sound Technologies

- DTS/DTS 96/24/Dolby Digital/Dolby Pro Logic II decoders
- WMA9 Pro decoder
- Audio delay for adjusting Lip Sync (0-160 ms) (VSX-918V-S)
- Dialogue Enhancement
- · Stream Direct (for pure and unprocessed digital sound)

Enhanced Convenience

- ▶ HDMI repeater (1080p, x.v.Colour compatible) (VSX-918V-S)
- ▶ HDMI switching (1080p compatible) (VSX-818V-K(-S))
- ▶ iPod player digital direct via USB
- ▶ USB memory audio ready (USB Host function)
- Portable audio player ready (analogue connection via front audio jack)
- SR+ terminal (Control your A/V receiver via Pioneer plasma TV remote Sensor) (VSX-918V-S)







VSX-818V-K Silver Finish Also Available (VSX-818V-S)



Rear Panel of VSX-918V (Same for VSX-818V, except it does not have SR+ terminals)

Portable Audio Player Ready (VSX-918V, VSX-818V)

A USB and a 3.5 mm mini audio jack are located on the front panel, for easy connection with a portable audio player. The music you usually listen to on the headphones can be shared with your friends and family in the living room via the A/V system.



Pioneer Hybrid Amplifier Design II — for Audiophile Sound Reproduction (VSX-918V, VSX-818V, VSX-518)

Pioneer Hybrid Amplifier Design II uses a newly selected module, for improved sound quality and total harmonic distortion (THD). The output transistors feature lower base capacitors than the previous model, realising wider range of current drive stage. The module has also decreased in size, and the smaller feedback loop minimises influences from the noise. Parts have been carefully selected, such as the power amplifier capacitors chosen by listening tests, and the pre-amp IC which minimises the signal path in Direct mode.



HDMI Repeater (VSX-918V)

The VSX-918V comes with the HDMI repeater feature, allowing full-digital transfer of high-quality audio as well as up to 1080p video signals. It also supports x.v.Colour, which can display rich textures and threedimensional images for enhanced visual entertainment.

HDMI Switching (VSX-818V)

The HDMI switching feature on the VSX-818V provides full-digital transfer of up to 1080p high-definition video signals.

* Analogue and/or digital connections necessary to hear audio from an HDMI component

VSX-518-S(-K)













Pioneer-Exclusive Innovations

- ▶ Phase Control (Bass management system ensures precision low frequency output)
- ▶ Advanced Sound Retriever (for enhanced PC and portable audio)
- ▶ Front Stage Surround Advance
- ▶ Auto Level Control

Surround Advance

· New Pioneer Hybrid Amplifier Design II (for audiophile sound reproduction)

Features for Superior Sound Quality

- Maximum power (8 ohms): 160 W x 5ch
- Digital Core Engine with Freescale 180MIPS 48-bit Processing DSP
- 192 kHz/24-bit DAC

Surround Sound Technologies

- DTS/DTS 96/24/Dolby Digital/Dolby Pro Logic II decoders
- · WMA9 Pro decoder
- · Dialogue Enhancement
- Auto Surround
- Stream Direct (for pure and unprocessed digital sound)

Enhanced Convenience

- Quick setup
- Portable audio player ready (analogue connection via front audio jack)
- SR remote control









HTP-4900



Audio Receiver + 5.1-Channel Speaker System

A package designed to complement your TV, with slim floor standing speakers and a powerful subwoofer for full surround sound

SX-217-S Audio Receiver

- Maximum power (8 ohms): 130 W x 6ch
- ▶ Sound Retriever (Restores the quality of compressed audio)
- ▶WMA9 Pro decoder
- DTS 96/24/Dolby Digital/Dolby Pro Logic II decoders
- ▶ Portable audio player ready (analogue connection via front audio jack) S-FCR4700 Multi-Channel Surround Sound Speaker System
- Dimensions (W x H x D)
- Front/Surround: 260 x 1096.5 x 260 mm, Centre: 270 x 96 x 90 mm Weight
- Front/Surround: 4.2 kg, Centre: 0.78 kg
- Impedance: 8 ohms

S-W3700 Subwoofer

- Dimensions (W x H x D): 190 x 360 x 320 mm
- · Weight: 4.0 kg

HTP-2900





T DOLBY

SX-217-S Audio Receiver

- Maximum power (8 ohms): 130 W x 6ch
- ▶ Sound Retriever (Restores the quality of compressed audio)

subwoofer for dynamic multi-channel entertainment

- ▶ WMA9 Pro decoder
- DTS 96/24/Dolby Digital/Dolby Pro Logic II decoders
- ▶ Portable audio player ready (analogue connection via front audio jack)

S-FCRW2900-S Multi-Channel Surround Sound

Speaker System

- Dimensions (W x H x D)
- Front/Surround: 100 x 136 x 80 mm, Centre: 270 x 96 x 90 mm, Subwoofer: 190 x 360 x 320 mm
- Weight
- Front/Surround: 0.55 kg, Centre: 0.78 kg, Subwoofer: 4.0 kg
- · Impedance: 8 ohms







FEATURE COMPARISON & SPECIFICATIONS: A/V RECEIVERS

	VSX-1018AH-S	VSX-918V-S	VSX-818V-K(-S)	VSX-518-S(-K)	SX-217-S (HTP-4900, HTP-29
	V3X-1010AII-3	V3A-310V-3	V3X-010V-R(-3)	V3X-310-3(-K)	3X-217-3 (1117-4300, 1117-23
	0	0- 1 400 4 111	(A) 111	0- 111	5. min 20 Or
Ott	0.	Q <u></u> Q.		0	
ower Output ontinuous Power Output					
Stereo (DIN, 1 kHz, 1.0 % THD) ated Power Output	150 W + 150 W (6 ohms)	100 W + 100 W (8 ohms)	100 W + 100 W (8 ohms)	100 W + 100 W (8 ohms)	100 W + 100 W (8 ohms)
Multi-ch (20 Hz - 20 kHz, 0.09 % THD for VSX-1018AH-S)†	•				
Multi-ch (20 Hz - 20 kHz, 0.06 % THD) Front	120 W + 120 W (6 ohms)†	95 W/ch (8 ohms)	95 W/ch (8 ohms)	95 W/ch (8 ohms)	100 W/ch (8 ohms)
Centre	120 W (6 ohms)†	95 W (8 ohms)	95 W (8 ohms)	95 W (8 ohms)	100 W (8 ohms)
Surround Surround Back	120 W + 120 W (6 ohms) [†] 120 W + 120 W (6 ohms) [†]	95 W/ch (8 ohms)	95 W/ch (8 ohms)	95 W/ch (8 ohms)	100 W/ch (8 ohms)
laximum Power (RMS, 1 kHz, 10 % THD)	180 W x 7ch (6 ohms)	160 W x 5ch (8 ohms)	160 W x 5ch (8 ohms)	160 W x 5ch (8 ohms)	130 W x 6ch (8 ohms)
mplifier Design					100 Hz for SW ch*1
hannels	7	5	5	5	6
mplification Type npedance Guarantee	Discrete (A.D. Energy) 6 ohms	Hybrid II	Hybrid II 6 ohms (Default Setting 8 ohms)	Hybrid II	Hybrid 6 ohms (Default Setting 8 ohn
onstruction Design	0 Onnio	o onno (Berault octang o onno)	o onnis (Detaute octaing o onnis)	o onino (Detaute deterny o onino)	o omino (Berdail octaing o omi
dvanced Direct Construction	•				
rans. Stabilizer ICACC Features	•				
uto MCACC	Advanced (9 Band EQ)	5 Band EQ	5 Band EQ		
SP Design igital Core Engine	Francola ANN MIDS Drossosing DCD	Freescale 180 MIPS Processing DSP	Francesia 180 MIDC Drossesias DCD	Franciala 180 MIDC Drassasina DCD	Francola 190 MIDC Decession -
ĂC	192 kHz/24-bit	192 kHz/24-bit	192 kHz/24-bit	192 kHz/24-bit	192 kHz/24-bit
OSP Features (License or Format)	TUV 0 1 (0.5)				
HX TS-HD Master Audio	THX Select2 Plus				
lolby TruHD	•				
Oolby Digital EX Oolby Digital	•	•	•	•	•
Oolby Pro Logic II/Dolby Pro Logic IIx	• / •	• / -	• / –	• / -	• / –
TS-ES TS 96/24	•	•	•	•	•
TS	•	•	•	•	•
VMA9 Pro Jeural THX	•	•	•	•	•
SP Features (Original)					
hase Control dvanced Surround Modes	13 Modes + 1*2	• 11 Modes + 1*3	• 11 Modes + 1*3	• 11 Modes + 1*3	9 Modes*4
ront Stage Surround Advance	• (Focus, Wide)	• (Focus, Wide)	• (Focus, Wide)	• (Focus, Wide)	9 Wodes
irtual Surround Back	•	•	• (6.1	•	•
ound Retriever lialogue Enhancement	• (Advanced)	• (Advanced)	• (Advanced) •	• (Advanced)	•
Aidnight Listening Mode	•	•	•	•	•
oudness one Control	•	•	•	•	•
Audio Features					
ound Delay (Lip-Sync) tream Direct	•	•	•	•	•
IDMI					
080p Transferring .v.Colour	•	•	• (Through)		
Deep Colour	•	-	• (Through)		
lepeater witching	•	•	•		
'ideo Converter	Up to HDMI (Analogue to HDMI only)		•		
Pod®					
Pod [®] Digital Audio Supported Models	• 5th.gen./nano and above	• 5th.gen./nano and above	• 5th.gen./nano and above		
SB			· ·		
erminal Type ISB Host Function (for Audio Playback)	A-Type •	A-Type •	A-Type •		
uner					
M/AM Tuner adio Random Preset Select	30	30	• 30	• 30	30
M/AM 3-Speed Accelerated Tuning	3U •	- 3U •	3U •	•	3U •
emote Control	_	_	_		
ype erminals (Main Room)	Preset	Preset	Preset	SR	SR
DMI Input/Output	2/1 (Repeater)	2/1 (Repeater)	2/1 (Switching)		
SB Input (for Memory Audio) igital Coaxial Input/Output	1 2/0	1 1/0	1 1/0	2/0	2/0
igital Optical Input/Output	4/1	2/0	2/0	1/0	1/0
nalogue Multi-ch Input	7.1ch	DVD 5.1ch	DVD 5.1ch	DVD 5.1ch	
reamp Output udio Input/Rec. Output	7.1ch 2/1	3/1	3/1	2/1	2/1
udio Mini Jack Input		1	1	1	1
V (Composite) Input/Rec. Output omponent Video Input	5/2 3	4/1 3	4/1 3	3/1	
Ionitor Video Output (to TV)/Component/S-Video/Composite	1/1/1	1/0/1	1/0/1	1/0/1	
ystem Remote (SR+) Input/Output Miscellaneous	1/1	1/1			
imensions (W x H x D)	420 x 173 x 433 mm	420 x 158 x 352.5 mm	420 x 158 x 352.5 mm	420 x 158 x 352.5 mm	420 x 158 x 348 mm
Veight ower Requirements	13.5 kg 110/120-127/220/230-240 V	8.1 kg 110/120-127/220/230-240 V	8.1 kg 110/120-127/220/230-240 V	7.9 kg 110/120-127/220/230-240 V	8.4 kg 110/120-127/220/240 V
ono. noquiromonto	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Power Consumption Power Consumption during Standby	410 W 0.6 W (Stby - KURO LINK off)	290 W 0.5 W	290 W 0.5 W	280 W 0.5 W	320 W 0.5 W

^{*15}ch (1 kHz, 1.0 % THD, 8 ohms), SW (100 Hz, 1.0 % THD, 8 ohms) *2 Action, Drama, Sci-Fi, Mono Film, Entertainment Show, Expanded Theater, TV Surround, Advanced Game, Sports, Classical, Rock/Pop, Unplugged, Extended Stereo + Phones Surround *3 Action, Drama, Mono Film, Entertainment Show, Expanded Theater, TV Surround, Advanced Game, Sports, Rock/Pop, Unplugged, Extended Stereo + Phones Surround *4 Advanced Movie, Advanced Music, Expanded Theater, 5ch Stereo, TV Surround, Advanced Game, Sports, Phones Surround, Virtual Surround

Optional iPod Dock for Pioneer A/V Receivers

IDK-01

Universal iPod Dock for A/V Receivers







- Enjoy iPod music through your Pioneer A/V receiver and home theater speakers
- View iPod video and photos on your TV
- TV on-screen menu display of your music, photo, and video library

Automatically charges iPod

Feature Highlights of the New DVD Players

HDMI

Since introducing the world's first Laser Disc player in 1980, Pioneer has remained at the forefront of optical disc innovations. As the leader in home entertainment products, we have taken advantage of our extensive engineering expertise to offer DVD players featuring the best of optical disc technologies. This year, our lineup is further enhanced with high resolution HDMI output to a flat screen TV, and close linkage with the latest PC file formats — deserving to be called the ultimate multimedia player.

HDMI Interface (DV-610AV, DV-410V)

These Pioneer DVD players feature HDMI (High Definition Multimedia Interface), an industrysupported, uncompressed, all-digital audio/video interface. For example, combine the DVD player with our VSX-1018AH A/V receiver and a flat screen TV, and HDMI's all-digital signal processing gives you superior pictures and sound — with no loss. It does this by

allowing transmission of both audio and video signals with no D/A or A/D conversion, through a single-cable connection. The units are even capable



* The above DVD players allow output of Linear PCM (2-channel) and compressed audio (Dolby Digital, DTS, and MPEG). The DV-610AV also allows 5.1-channel Linear PCM and 2-channel/5.1-channel DSD output. 24 Hz is not supported with HDMI 1080p output.

Versatile Parameters for Video Control

All Pioneer DVD players feature the Video Adjust function which allows versatile image control for customised picture quality. You can adjust Sharpness, Brightness, Contrast, Gamma, Hue, and Chroma Level. The DV-610AV also has the Block Noise Reduction and Ringing Noise



DivX® Video Playback

The DVD players allow playback of DivX® videos from CD-R/-RW and DVD-R/-RW discs, and from USB memory with DV-610AV, DV-510K, DV-410V, and DV-310. DivX® is a popular media technology including digital video, which ensures a high compression rate and fast transfer speed without appreciably compromising the picture quality. Create a DivX® movie on your PC, burn it to a disc, and play it on the Pioneer DVD players.

What's more, the DV-610AV is an official DivX® Ultra Certified product. This means the unit lets you enjoy DivX® media files with interactive features like DVD Video — including menus, selectable subtitle languages/audio tracks, and so on.

* DivX, DivX Ultra Certified, and associated logos are trademarks of DivX, Inc. and

WMV Playback (DV-610AV, DV-410V)

These DVD players are compatible with WMV 9 (Windows Media® Video), the latest high-resolution high-compression video format used by Windows Media® Encoder 9 Series. Enjoy your own compilation of videos downloaded from websites.

* Windows Media, and the Windows logo are trademarks, or registered trademarks, of Microsoft Corporation in the United States and/or other countries.

WMA/MPEG-4 AAC/MP3 Playback

All Pioneer DVD players can playback WMA and MP3 compressed audio files, as well as the latest MPEG-4 AAC format.

USB Terminal (DV-610AV, DV-510K, DV-410V, DV-310)

The USB terminal on these units allow connection with USB mass storage class devices, for easy playback of WMA/ MPEG-4 AAC/MP3 music files, JPEG photo files, and DivX video files. The DV-610AV and DV-410V can also play WMV files.

















0000

A high-performance DVD Audio/Video & SACD player featuring HDMI 1080p upscaling, USB, WMV playback, and DivX® Ultra playback

Н□Ш 1080р



192 kHz/24-bit D/A Converter (DV-610AV)

The DV-610AV features 192 kHz/24-bit DACs, to reproduce 192 kHz/24-bit 2-channel stereo, or 96 kHz/24-bit 5.1-channel surround sound. By connecting to a 5.1-channel A/V receiver, you can enjoy multi-channel playback of high-quality SACD or DVD-Audio sound.

CD -> USB Recording (DV-610AV)

The DV-610AV lets you directly record songs from CDs on to USB devices. The data is stored in MP3 format, letting you can choose the bit rate from 128/192/320 kbps. You can copy the whole album, or select tracks.



---0000 8000

0000 0000

0000

0000

---0000 6000

An advanced DVD player featuring karaoke echo and digital key control, USB, JPEG Slideshow with Music, and DivX® playback











PhotoViewer wma/mpeg-4 AAC/mp3 PAL/MTSC of The Dolby Digital USB COMPATBLE

A slim multi-format DVD player featuring Dual PureCinema Progressive Scan, USB, and DivX® playback



PhotoViewer WMA/MPEG-4 AAC/MP3 MA/MPEG-4 AAC/MP3 DIGITAL DIGIT **DV-210K-K**

A slim multi-format DVD player featuring karaoke echo and digital key control, JPEG Slideshow with Music, and DivX® playback



Not available in some countries

DV-310-S

	HDMI	USB	DivX	WMV	WMA/MPEG-4 AAC/MP3	Karaoke
DV-610AV	•	•	• (Ultra)	•	•	-
DV-510K	-	•	•	_	•	•
DV-410V	•	•	•	•	•	-
DV-310	_	•	•	-	•	-
DV-210K	-	_	•	_	•	•

* Not compatible with DRM (Digital Rights Management) contents. Not compatible with high-definition video contents

FEATURE COMPARISON & SPECIFICATIONS: DVD PLAYERS


	DV-610AV-S	DV-510K-S	DV-410V-S(-K)	DV-310-S	DV-210K-K
	E-14 1900				
	* Tag + 1 - 1 - 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 -	* C. remou		200	C
Technical Features					
Playback Discs	DVD/SVCD/VCD/CD/DVD-Audio/ SACD/CD-R/-RW/DVD-R/-R DL/-RW (Video Mode, VR Mode W/CPRM)/	DVD/SVCD/VCD/CD/CD-R/-RW/ DVD-R/-R DL/-RW (Video Mode, VR Mode W/CPRM)/DVD+R/	DVD/SVCD/VCD/CD/CD-R/-RW/ DVD-R/-R DL/-RW (Video Mode, VR Mode W/CPRM)/DVD+R/	DVD/SVCD/VCD/CD/CD-R/-RW/ DVD-R/-R DL/-RW (Video Mode, VR Mode W/CPRM) /DVD+R/	DVD/SVCD/VCD/CD/CD-R/-RW/ DVD-R/-R DL/-RW (Video Mode, VR Mode W/CPRM)/DVD+R/
Twin-Wave Laser Pickup	DVD+R/+R DL/+RW (Video Mode) •	+R DL/+RW (Video Mode)	+R DL/+RW (Video Mode)	+R DL/+RW (Video Mode)	+R DL/+RW (Video Mode)
Dual System (PAL/NTSC)	•	•	•	•	•
Compressed Video and Music Playback	'				
WMV	(111)	•	•	•	
DivX JPEG PhotoViewer	• (Ultra)	•	•	:	•
HD JPEG	•	-	•	-	-
MPEG-4 AAC	•	•	•	•	•
MP3	•	•	•	•	•
WMA PHOTO + MUSIC MIX (JPEG Slideshow with Music)	•	•	•	•	•
Audio Features		•	•	•	·
DVD-Audio Compatibility	•				
SACD Multi Compatibility	•				
192 kHz/24-bit D/A Converter (6ch) 96 kHz/24-bit D/A Converter	•	•	•	•	•
DTS 96/24 Decoder		•	•	•	•
DTS 5.1-Channel Decoder	•				
DTS 2-Channel Downmix Output	•		•		
Dolby Digital 5.1-Channel Decoder	•				
Virtual Surround Digital Output (Dolby Digital, DTS (DVD),	•	•	•	•	•
MPEG Audio, Linear PCM)			_		·
Sound EQ		•	•	•	•
Dialogue	•	•	•	•	•
Dynamic Range Control (DVD) Digital Out On/Off	•	•	•	•	•
Karaoke Mic Echo	•	•	•	•	•
Karaoke Digital Key Control		•			•
Video Features					
Dual PureCinema Progressive Scan (PAL/NTSC)	•	•	•	•	•
108 MHz/12-bit D/A Converter I/P Simultaneous Output		•	•	•	•
BNR Block NR & Ringing NR	•				
Video Adjust	•	•	•	•	•
Zoom Function	•	•	•	•	•
Conveniences	DVD. F. VCD. 1	DVD. F. VCD. 1	DVD. F. VCD. 1	DVD. F. VCD. 1	DVD. F. VCD. 1
Last Memory (DVD) Resume Function (Stop Key)	DVD: 5, VCD: 1	DVD: 5, VCD: 1	DVD: 5, VCD: 1	DVD: 5, VCD: 1	DVD: 5, VCD: 1
10-Key Direct Search and Play (Chapter/Track)	•	•	•	•	•
OSD Languages	English/French/Spanish/Chinese	English/French/Spanish/Chinese/Hindi	English/French/Spanish/Chinese	English/French/Spanish/Chinese/Hindi	English/French/Spanish/Chinese/Hind
Screensaver Auto Power Off	•	•	•	•	•
CD->USB Recording	:	•	•	•	•
Terminals					
USB	1*3	1*4	1*3	1*4	
Mic Jack	4/- 4000	2	4 /: 400- : :: 1		2
HDMI Terminal Component Video Output	1 (to 1080p/60 Hz DSD)	1	1 (to 1080p/60 Hz) 1	1	1
S-Video Output	1	1	1	1	I
Video Output	i	1	1	1	1
5.1-Channel Audio Output	1			,	
Audio Output Coaxial Digital Output		1	1	1	1
OUGAIGI DIVILGI UULDUL			l I	1	ı
Optical Digital Output	1 1	1	1	1	
Optical Digital Output Specifications	· ·		1	1	
Optical Digital Output Specifications Power Requirements	1 1 110-240 V 50/60 Hz	1 110-240 V 50/60 Hz	110-240 V 50/60 Hz	110-240 V 50/60 Hz	110-240 V 50/60 Hz
Optical Digital Output Specifications Power Requirements Power Consumption	1 1 110-240 V 50/60 Hz 12 W	1 110-240 V 50/60 Hz 11 W	110-240 V 50/60 Hz 11 W	110-240 V 50/60 Hz 11 W	7 W
Optical Digital Output Specifications Power Requirements	1 1 110-240 V 50/60 Hz	1 110-240 V 50/60 Hz	110-240 V 50/60 Hz	110-240 V 50/60 Hz	110-240 V 50/60 Hz 7 W 0.8 W 420 x 49.5 x 221 mm

- *1 Not available with DVD-A/SACD/MPEG-4 AAC/WMA/MP3 playback. *2 Not available with MPEG-4 AAC/WMA/MP3 playback.
- **3 Only supports USB Mass Storage Class. Compatible with DivX/WMV/MPEG-4 AAC/WMA/MP3/JPEG.

 **4 Only supports USB Mass Storage Class. Compatible with DivX/MPEG-4/AAC/WMA/MP3/JPEG.


Note: Not compatible with DRM (Digital Rights Management) contents. Not compatible with high-definition

Rear Panels





DV-410V-S(-K)



DV-510K-S/DV-310-S



Pioneer High Performance DVD Recorders with Built-in HDD

Since introducing the world's first DVD recorder in 1999, Pioneer has been leading the digital revolution in home entertainment. Now, the highest resolution DVD recorder and HDD are combined into one — becoming a universal archive for audio as well as visual entertainment. These state-of-the-art systems will open a new world to your home entertainment.

DVD Multi Disc Recording and Playback

In addition to DVD-RAM* and DVD+R/RW, Pioneer DVD ers are compatible with Dual Layer DVD-R and Double Layer DVD+R, letting you record and playback a wide selection of discs. No need to worry whether your discs are





HDMI Interface (DVR-660H, DVR-560H)

These Pioneer DVD recorders feature HDMI (High Definition Multimedia Interface), an industry-supported, uncompressed, alldigital audio/video interface. Connect the



HDMI's all-digital signal processing gives you superior pictures and sound — with no loss. It does this by allowing transmission of both audio and video signals with no D/A or A/D conversion, through easy single-cable connection. The DVR-660H and DVR-560H feature 1080 digital output, to deliver pictures in the highest resolution.



KURO LINK (DVR-660H, DVR-560H)

By connecting these DVD recorders with a compatible Pioneer flat screen TV, KURO LINK lets you operate the basic functions such as power on/off, playback, and recording, with only the flat screen TV's remote control.

Connect Your Digital Camcorder (DVR-660H, DVR-560H)

Connect your digital video camcorder through the DV-In terminal, and discover how simple it is to view and organize your home movies. When you import video, Auto Chapter can automatically divide footage into chapters for quick access to your favourite scenes. You can edit footage any way you like using the easy-to-follow GUI — changing sequences or selecting only desired scenes — and copy the results to DVD. The remote control is all you need to navigate through functions on both the camcorder and the


* "i.LINK" and "i.LINK" logo are trademarks. Can be connected to video DV decks

On-screen Help

Operating a DVD recorder has never been this easy. When you are not sure what to do, just press the HELP button on the new user-friendly remote control. A pop-up message will appear on your screen to guide you through the next steps of the menu



Finding recorded programmes is easier than ever. Just scroll through the thumbnails (with sound) of the videos. Choose between 4 titles or 8 titles display mode.








Quick Preview

You can select programmes recorded on the hard disk drive (HDD) from the Disc Navigator, to see a one minute preview. See digests of recorded programmes at your fingertips.





3D Noise Reduction (Component Frame DNR)

Independent noise reductions are applied to Y, PB, PR signals to create noise-free high-quality pictures.

PAL/NTSC 3D Y/C Separation Circuit

The DVR-660H and DVR-560H carry the world's first PAL 3D Y/C separation circuit. It eliminates cross-colour artefacts and dot crawls to deliver superior picture quality.



Large Capacity in Various Recording Modes

Recording Mode		HDD		DVD+R	Double Layer DVD+R	DVD+RW	DVD-RAM†	DVD-R	Dual Layer DVD-R	DVD-RV
	DVR-660H	DVR-560H	DVR-340H	DVR-660H/DVR-360H/DVR-340H						
XP+	36 H	23 H								
XP	53 H	34 H	17 H	1 H	1.8 H	1 H	1 H	1 H	1.8 H	1 H
SP	106 H	68 H	34 H	2 H	3.5 H	2 H	2 H	2 H	3.5 H	2 H
LP	212 H	136 H	68 H	4 H	7.1 H	4 H	4 H	4 H	7.1 H	4 H
EP	319 H	204 H	102 H	6 H	10.7 H	6 H	6 H	6 H	10.7 H	6 H
SLP	425 H	272 H	136 H	8 H	14 H	8 H	8 H	8 H	14.3 H	8 H
SEP	532 H	340 H	170 H		_	_	10 H	10 H	17.9 H	10 H
MN1	711 H	455 H	227 H	8 H*	14 H*	8 H*	13 H	13 H	24 H	13 H

Up to 999 titles can be recorded on HDD. Up to 99 titles can be recorded on a DVD-R/RW/-RAM disc. Up to 49 titles can be recorded on a DVD+R/+RW disc.

These figures are for MN4 recording mode

DVR-660H-S

Video Recording Features

optimum picture quality

Video Playback Features

• 108 MHz/12-bit D/A converter • Dual PureCinema Progressive Scan

▶ DVD multi format compatible

on 250 GB HDD

(PAL/NTSC)



250 GB Hard Disk Drive + DVD Recorder

▶ Maximum 711 hours of recording (MN1)

• High-speed copy (HDD to DVD, DVD to HDD)

· Advanced Variable Bit Rate Recording for

▶ 1080p upscaling with HDMI output

▶ Official DivX Certified product[†]





 Dual System • NTSC on PAL TV

Audio Features

▶ Digital Jukebox



▶ PAL/NTSC 3D Y/C Separation

▶ 192 kHz/24-bit audio D/A converter

▶ Connect PC via USB (DivX, JPEG, MP3,









with Music) **▶ USB terminal**

· Help function

- ▶i.LINK (DV) terminal
- · HDD sleep mode for reduced noise during DVD/CD playback

▶ PHOTO + MUSIC MIX (JPEG Slideshow



► WMA/MP3 playback

WMA)

- Disc Navigator
- Quick Preview


H⊒MI[™] 1080p



† Plays all versions of DivX® video (including DivX® 6) with standard playback of DivX® media files.

Auto Start Recording Function for External Input

Pioneer DVD recorders come with the Auto Start Recording Function which links with the timer of the connected set top box. The DVD recorders can automatically start and stop recording by detecting the signals from the set top box such as a satellite tuner.



Super High Quality XP+ Recording Mode (DVR-660H, DVR-560H)

The DVR-660H and DVR-560H feature XP+ recording mode, which can make high-grade recordings to the HDD with a transfer rate of around 15 Mbps. The mode lets you store programmes from external components in superb quality.

USB Connections (DVR-660H, DVR-560H)

These DVD recorders offer various input and output options via USB connection. You can connect to HDD camcorders, digital cameras, printers, keyboards, and PCs through the USB port on the front panel. Two types (A & B) of terminals are available depending on your device.




PHOTO + MUSIC MIX (DVR-660H, DVR-560H)

With Pioneer's PHOTO + MUSIC MIX, you can enjoy JPEG slide shows on your display accompanied by your favourite music from files stored on the HDD. An ideal function for parties and various other occasions.



DivX® Video Playback

Pioneer DVD recorders play DivX[®] videos burned on a CD-R/RW/ROM disc. DivX® is a popular media technology including digital video, which ensures a high compression rate and fast transfer speed without



PC, burn it to a disc, and play it on the Pioneer DVD recorders. * DivX, DivX Certified, and associated logos are trademarks of DivX, inc. and are

Connect PC via USB (DVR-660H, DVR-560H)

Using a USB connection, you can easily copy WMA, MP3, JPEG, and even DivX files from your PC archive to the DVD recorder's HDD. You can play the stored files by the Home Media Galley function.

* File transfer available with Windows Media Player 11 installed PCs.

Home Media Gallery (DVR-660H, DVR-560H)

With the Home Media Gallery function, you can easily playback files stored on the HDD. Direct keys for the Home Media Gallery are available, providing easy access to most recently recorded DivX file, JPEG files, and Linear PCM/MP3/WMA files.

Key	File Formats	- William
PC VIDEO	DivX	-
MUSIC	Linear PCM/MP3/WMA and JPEG	1
PHOTO	JPEG and Linear PCM/MP3/WMA	MICELLA



▶ PAL/NTSC 3D Y/C Separation

▶ 192 kHz/24-bit audio D/A converter

▶ Connect PC via USB (DivX, JPEG, MP3,

Video Recording Features

- ▶ Maximum 455 hours of recording (MN1) on 160 GB HDD
- ▶ DVD multi format compatible
- · Advanced Variable Bit Rate Recording for optimum picture quality
- High-speed copy (HDD to DVD, DVD to HDD)

Video Playback Features

- 108 MHz/12-bit D/A converter
- Dual PureCinema Progressive Scan (PAL/NTSC)
- ▶ 1080p upscaling with HDMI output
- ▶ Official DivX Certified product[†]

WMA) Conveniences

 Dual System NTSC on PAL TV

Audio Features

▶ Digital Jukebox

► WMA/MP3 playback

- ▶ Home Media Gallery
- Disc Navigator
- Quick Preview

- · Help function
- ▶ PHOTO + MUSIC MIX (JPEG Slideshow with Music)
- **▶ USB terminal**
- ▶ i.LINK (DV) terminal
- · HDD sleep mode for reduced noise during DVD/CD playback









A package (receiver subwoofer + speakers) to complement your home theatre with DVD recorder as the centre of your A/V entertainment. For details, please refer to the Pioneer "DVD Home Theatre Systems 2008-2009" Catalogue.

DVR-340H-S



















Disc Navigator

Quick Preview

· Help function





80 GB Hard Disk Drive + DVD Recorder

Video Recording Features

- ▶ Maximum 227 hours of recording (MN1) on 80 GB HDD
- ▶ DVD multi format compatible
- · Advanced Variable Bit Rate Recording for optimum picture quality
- High-speed copy (HDD to DVD, DVD to HDD)

Video Playback Features

- 108 MHz/10-bit D/A converter (Progressive Mode only)
- Dual PureCinema Progressive Scan (PAL/NTSC)
- ▶ Official DivX Certified product[†]
- Dual System
- NTSC on PAL TV

Audio Features

- ▶ 192 kHz/24-bit audio D/A converter
- ► WMA/MP3 playback
- ▶ Digital Jukebox

RW RW Conveniences



00.0


FEATURE COMPARISON & SPECIFICATIONS: DVD RECORDERS

		DVR-6	60H-S	DVR-5	60H-S	DVR-3	40H-S
		.5	0	5	0	121	
HDD/DVD		HDD (250 GB)	DVD	HDD (160 GB)	DVD	HDD (80 GB)	DVD
Recording Mode (Format) HDD Function			VR Mode Video Mode		VR Mode Video Mode		VR Mode Video Mod
One-Touch Copy		• (HDD to DVD, DVD to HDD)	-	• (HDD to DVD, DVD to HDD)	-	• (HDD to DVD, DVD to HDD)	-
High-Speed Copy		(HDD to DVD, DVD to HDD)	-	(HDD to DVD, DVD to HDD)	-	• (HDD to DVD, DVD to HDD)	-
Rate Conversion Copy Optimized Copy		(HDD to DVD, DVD to HDD) (HDD to DVD)	<u>-</u>	(HDD to DVD, DVD to HDD) (HDD to DVD)		(HDD to DVD, DVD to HDD) (HDD to DVD)	
Disc Back-up		•	-	•	-	•	_
Resume (by Title) Playback		•	_	•	_	•	_
Advanced Disc Navigator		•	(before finalization)	•	(before finalization)	•	(before finalize
Quick Preview		•	-	•	_	•	_
Seamless Playback CM Skip/Back (Commercia	al Skip/Back)	•	• –	•	• –	•	• –
Simultaneous Playback and	Recording/Chase Play	•	-	•	-	•	-
1.5x Quick View (scan 1)* ¹ Recording				•		•	•
PAL/NTSC		•	/ •	• ,	/ •	• ,	•
Variable Bit Rate Recordin	ng		•				
Easy Timer G-Code System			-		-		
One Touch Recording			,		•		
Number of Events Linear PCM Recording (Au	ıdio)		nonth ahead) PCM)	32 (up to 1 m		32 (up to 1 m • (LP	
PC VIDEO	DivX [File Copy]	•		•		- (LI	
PhotoViewer Digital Juke Box	JPEG [File Copy] Linear PCM [CD Ripping]	•	_ • 	•	_ • 	AC3 (CD recording)	
Digital dake Dox	MP3 [File Copy]	•		•		•	
Editing	WMA [File Copy]	•		•		•	
Sisc Name/Title Name Inp	ut						
Erase Title		•	•*2	•	•*2	•	•*2
Chapter Edit Play List		•	• –	•	• –	•	• –
Accuracy		Frame*3/Video Mode	Frame Title	Frame*3/Video Mode	Frame Title	Frame*3/Video Mode	Frame Title
Copy List Picture Quality				•		•	
Progressive Scan		PAL/	NTSC	PAL/I	NTSC	PAL/I	NTSC
3-D Noise Reduction Video DAC		12 hit/100 MUz /Dro	gressive Mode only)	12-bit/108 MHz (Pro	grassiva Mada anly)	10 hit/100 MUz /Pro	gressive Mode only)
3D Y/C Separation Circuit (NTSC/PAL)		12-010/100 WITZ (110		12-011/100 WITE (110		• (NTS	
Digital TBC Picture Creation			•				
Compressed Video And M	usic Play						
DivX®		• *		•3		-	• (CD only*4)
DivX PC VIDEO JPEG* ⁵ PhotoViewer			•			_	• (CD only*4)
MP3*6							
WMA* ⁷ Jukebox		•	-	•	_	•	_
Convenience							
PHOTO + MUSIC MIX		•	-	•	_	-	
Create PhotoMovie Auto Scan Channel Preset	<u> </u>	•	-	•	-	-	
HELP Function	-		•		•		•
OSD Languages KURO LINK		English/Portuguese/It	alian/Spanish/Chinese	English/Portuguese/It		English/Portuguese/It	alian/Spanish/Chinese -
Connect PC (via USB)			•		•	-	-
Home Media Gallery Tuner				•		-	
System			/K, NTSC-M/N B/G, D/K	PAL-B/G, I, D/ SECAM-		PAL-B/G, I, D/ SECAM-	
Terminal Input	AV (Audio/Video)	3 Ifro	nt : 1)	3 (fro	nt : 1)	3 (fro	nt : 1)
	S-Video	3 (fro	nt : 1)	3 (fro	nt : 1)	3 (fro	nt : 1)
Output	AV (Audio/Video) S-Video		2		2		
	Component Video		1		1	1	
	Digital Audio HDMI		xial Op/60 Hz)	Coa 1 (to 108			xial -
.LINK (IEEE1394)*8 (DV Te		1 (in)	1 (in)	-	-
USB Bionage System Barneta Ce	ontrol		t/Type B front)	2 (Type A from		CD Cont	
Pioneer System Remote Co Dimensions (W x H x D)	UIILTOI		rol Input x 288 mm		rol Input x 288 mm		rol Input x 318 mm
Weight		4.3	kg	4.1	kg	4.2	kg
Power Requirements			240 V 0 Hz	110-2 50/6	240 V 0 Hz	110-127/2 50/6	
Power Consumption		48	W	43	W	39	W
D C 4: d:	g Standby Mode	0.67 W (D	isplay off)	0.67 W (D		0.32 W (D	isplay off)
Remote Control	,		V Preset)	• (with T	/ Preset)	a /sarith Ti	/ Preset)

- *1 Sound is output with Dolby Digital and Linear PCM audio only. Dialogue may not be clearly reproduced depending on recording conditions.
- *2 For DVD-R discs, remaining volume is not increased after titles are erased. For DVD-RW discs, remaining volume is increased when the last title is erased.
- *3 With high-speed copy in "Video Mode", editing point might be moved.
 *4 Recording format should be in accordance with ISO9660 level 2 CD-ROM file system. Both Romeo and Joliet file systems are playable, CD physical format; Mode1, Mode2 XA Form 1, Chinese
- characters cannot be displayed, although files featuring such names can be played.

 *5 JPEG file compatibility: This recorder is compatible with FUJICOLOR CD, as well as CD-R/RW/ROM discs containing JPEG files. Baseline JPEG and EXIF files up to 19 megapixels are supported (max. vertical resolution is 3840 pixels and max, horizontal resolution is 5120 pixels).
- *6 Compatible with MPEG1 Audio Layer3 32 kHz and 44.1 kHz and 48 kHz formats. MP3 file name requires MP3 or mp3 as an extension. Up to 99 folders and 999 tracks (MP3 and WMA) in total can be played. (DVR-660H-S/

Rear Panels



DVR-660H-S / DVR-560H-S

*8 Can be connected to video DV decks and DV camcorders (some models are not compatible). CANNOT be connected to DVD players and A/V receivers.

files/folders than this on the disc, then more can be reloaded)

DVR-560H-S only. If there are more files/folders than this on the disc, then more can be reloaded)

WMA content can be encoded by using Windows Media Player for Windows Vista or Windows

Windows Media Player 9, 10, or 11 series. Compatible with sampling rate of 32 or 44.1 or 48 kHz. Not

compatible with loss-less-encoding or variable-bit-rate (VBR) WMA files. WMA files encoded with

DRM (Digital Rights Management) copy protection* will not be played back. * DRM copy protection DRM (Digital Rights Management) copy protection is a technology designed to prevent unauthorized

recording equipment) used to record it. For detailed information, please see the instruction manuals or help files of your PC (or other WMA recording equipment) and/or software. Up to 99 folders and 999 tracks (MP3 and WMA) in total can be played. (DVR-660H-S/DVR-560H-S only: If there are more

copying by restricting playback, etc. of material on devices other than the PC (or other WMA

DVR-340H-S

Pure Audio Components — Re-Awaken Your Sound Instincts

The pure audio components are based on "quick response" and "open sound" — the essential elements required in professional recording studios. AIR Studios — home of some of the sharpest ears in the world — contributed to the final tuning. The overall design is based on rigorous simplicity. for sound that is truer to the original source than ever.

A9 A-A9-S




Integrated Amplifier

• AIR Studios sound tuning • Continuous power output: 70 W + 70 W (20 Hz-20kHz, 4 ohms, 0.2 % THD), 55 W + 55 W (20 Hz-20 kHz, 8 ohms, 0.2 % THD) • Twin large toroidal transformers • USB input for PC (Type B) • Direct mode • Input sensitivity/impedance - Line level: 200 mV/47 kohms, Phono (MM): 2.8 mV/47 kohms, Phono (MC): 0.3 mV/100 ohms • Frequency response - Line: 5 Hz - 100 kHz (+0 dB - 3 dB), Phono (MM): 20 Hz - 20 kHz (±0.2 dB). 22 W • Dimensions (W x H x D): 420 x 113 x 340 mm • Weight: 10 kg Phono (MC): 20 Hz - 20 kHz (±0.3 dB) • S/N ratio (Direct mode) - Line: 103 dB, Phono (MM): 80 dB (at 2.8 mV), Phono (MC): 70 dB (at 0.3 mV) • Tone control - Bass: 100 Hz ±10 dB, Treble: 10 kHz ±10 dB • Audio input: 6 (CD/PHONO/TAPE/AUX/TUNER/USB for PC) • Audio out: 2 (TAPE/PREOUT) • Power requirement: AC 220-240 V. 50 Hz • Power consumption: 200 W



• Dimensions (W x H x D): 420 x 113 x 369 mm • Weight: 10.8 kg



Quick-Response Power Supply Circuit Isolated Power Supply Block

A6 A-A6-S



• AIR Studios sound tuning • Continuous power output: 60 W + 60 W (20 Hz-20 kHz, 4 ohms, 0.2 % THD), 45 W + 45 W (20 Hz-20 kHz, 8 ohms, 0.2 % THD) • Twin transformers • Direct mode • Input sensitivity/impedance - Line level: 200 mV/47 kohms, Phono (MM): 2.8 mV/47 kohms • Frequency response - Line: 5 Hz - 100 kHz (+0 dB - 3 dB), Phono (MM): 20 Hz - 20 kHz (±0.2 dB) • S/N ratio (Direct mode) - Line: 103 dB, Phono (MM): 80 dB (at 2.8 mV) • Tone control - Bass: 100 Hz ±10 dB, Treble: 10 kHz ±10 dB • Audio input: 5 (CD/PHONO/TAPE/AUX/TUNER) • Audio out: 1 (TAPE) • Power requirement: AC 220-240 V. 50 Hz • Power consumption: 170 W • Dimensions (W x H x D): 420 x 100 x 359 mm • Weight: 10.0 kg





Integrated Amplifiers	AIR Studios Sound Tuning	Power	Transformer	USB input for PC (Type B)	Direct Mode
A-A9-S	•	70 W + 70 W	Toroidal	•	•
A-A6-S	•	60 W + 60 W	Standard	_	•

D9 PD-D9-S



Super Audio CD Plaver

• AIR Studios sound tuning • 192 kHz/24-bit Twin Wolfson DAC • Legato Link PRO and Hi-Bit Technology • Pure Audio Listening mode • Frequency response - SACD: 4 Hz - 50 kHz (-3 dB), CD: 4 Hz - 20 kHz (-1 dB) • S/N ratio - SACD: 110 dB, CD (Music CD): 115 dB • Dynamic Range: SACD: 110 dB, CD: 100 dB • Power requirement: AC 220-240 V, 50/60 Hz • Power consumption:











Super Audio CD Player

• AIR Studios sound tuning • 192 kHz/24-bit Twin Burr-Brown DAC • Legato Link PRO and Hi-Bit Technology • Pure Audio Listening mode • Frequency response - SACD: 4 Hz - 50 kHz (-3 dB), CD: 4 Hz - 20 kHz (-1 dB) • S/N ratio - SACD: 110 dB, CD (Music CD): 113 dB • Dynamic Range: SACD: 108 dB, CD: 99 dB • Power requirement: AC 110 V/220-240 V, 50/60 Hz • Power consumption: 22 W • Dimensions (W x H x D): 420 x 100 x 340 mm • Weight: 4.5 kg



FM/AM Tuner

• Schottky barrier diode • Auto preset memory (up to 100 stations) • MPX noise cancel button • Tuning frequency range: 87.5 MHz • 108 MHz • Usable sensitivity (Mono): 11.3 dBf, IHF (1.0µ V/75 ohms) • S/N ratio (at 85 dBf): 76 dB (mono)/75 dB (stereo) • Total Harmonic Distortion (stereo): 0.3 % (1 kHz) • Frequency response: 30 Hz - 15 kHz ±1.0 dB • Power requirement: AC 110 V/220-240 V, 50/60 Hz • Power consumption: 8.0 W • Dimensions (W x H x D): 420 x 78 x 344 mm • Weight: 4.3 kg



SACD Players	AIR Studios Sound Tuning	Twin DAC	Hi-Bit Technology	Legato Link PRO	Pure Audio Listening Mod
PD-D9-S	•	Wolfson	•	•	•
PD-D6-S	•	Burr-Brown	•	•	•

Hi-Fi Components — for Your Audio Bliss

Hi-Fi components from the leader in quality audio — Pioneer. Our product line is extensive, the variety is diverse, and the combination possibilities are immense. Whatever your musical taste or technical sophistication, you'll find Pioneer components that meet your needs.

PD-217



CD Player

• Full-function remote control • Numeric keypad on unit • 1-bit DLC (Direct Linear Conversion) D/A Converter • Digital level control (on remote)

• Design for low noise: Display off switch • Compu-PGM Edit and Auto programme editing • Hi-Lite Scan • Memory hold • Talk-back input Headphone output with volume control



PD-117



CD Player

• 1-bit DLC (Direct Linear Conversion) D/A Converter • Design for low noise: Display off switch . Compu-PGM Edit and Auto programme editing · Hi-Lite Scan · Memory hold · Talk-back input · Pioneer SR (System Remote) terminal

* The PD-117 does not come with a remote control, but it can be controlled with a Pioneer remote using the SR (System Remote) terminal on the rear



CT-W208R



Cassette Deck

ullet 2 auto-reverse cassette transports: one plays, and the other plays and records in both directions • Dolby B/C Noise Reduction with built-in MPX filter · Normal/high-speed tape dubbing · Relay play · Music/Skip Search

Auto space rec mute
 Auto tape selector



CT-W106



Cassette Deck

· Normal/high-speed tape dubbing · Dolby B Noise Reduction with builtin MPX filter · Auto record level controller · Anti-resonance and antivibration design: Large insulators • Two cassette transports • Relay play • LED level indicator • Auto tape selector (Type I/Type II)

A-209

Integrated Amplifier

• Continuous power output: 60 W + 60 W (DIN, 4 ohms) • Wide-Range Linear Circuit • Advanced Direct Energy MOS FET Power Amp • 6 inputs: PHONO, CD, TUNER, LINE, TAPE 1/CD-R/MD, TAPE 2/MONITOR • Low power consumption design · Local circuits off · Complementary capacitor pair • "DIRECT" switch • Bass/treble tone controls • Loudness switch · 2-way tape dubbing · Headphone output · Connections for 2 pairs of speaker systems



F-208



Quartz-PLL Synthesizer Tuner

• Random presets for 30 FM/AM stations • 4-letter station name memory: You can conveniently give 4-character names to your favourite preset stations - "ROCK" and "HITS", for example, • Memory scan; all 30 preset stations are automatically sampled in sequence for you to select a station to listen



GR-333



7-Band Graphic Equalizer

· 7-band equalisation: permits boost and cut up to 10 dB · LEDs in slider tips: depict the "shape" of response, channel by channel . Equalizer on/off switch



SE-M280

Stereo Headphone



- Frequency response: 5 Hz-25 kHz
- · Soft oval ear pads and baffle board structure for comfortable fit
- · Self adjusting headband
- · Large diameter (40 mm) driver units
- · Gold-plated 2-way mini-plug
- · Weight: 225 g (without cord)



DM-DV5

Microphone

Type: dynamic

· Micro mic unit featuring high sound quality

• Talk switch for remote on/off

2-way adaptor plug

* Available in certain Asian countries only



Speaker Systems — the Keys to Satisfying Home Entertainment

After 70 years since the first hi-fi speaker was made by our founder, Pioneer continues to take advantage of the expertise accumulated over the years. Our comprehensive products come in stylish forms to match your room décor, with dynamic sound for the ultimate home

S-EU8 Series

S-EU8TB



S-EU5 Series

EURO


A sleek 4-way tall-boy front speaker system featuring European design and superior sound ensured by advanced materials and constructions

- · Magnetically-shielded 4-way tall-boy speakers
- Kevlar® brand fiber cone woofers
- ABD (Acoustic Balanced Driver) Technology for higher clarity with minimum standing waves inside the enclosure
- Maximum power: 130 W
- Dimensions (W x H x D): 250 x 1190 x 300 mm
- · Weight: 25 kg
- · Impedance: 6 ohms



A stylish 2-way tall-boy front speaker system featuring natural

- · Magnetically-shielded 2-way tall-boy speakers
- · Twin woofers placed vertically on the same axis for superior sound localisation
- · LDMC (Linear Drive Magnetic Circuit) technology for superior linearity
- Maximum power: 130 W
- Dimensions (W x H x D): 195 x 1032 x 289 mm
- Weight: 13.4 kg
- Impedance: 8 ohms



EURO

S-EU8C

S-EU5CR **EURO**

- · Magnetically-shielded 3-way centre speaker
- Kevlar® brand fiber cone woofers
- Maximum power: 130 W
- Dimensions (W x H x D): 560 x 190 x 300 mm
- Weight: 15.6 kg
- · Impedance : 6 ohms



 Magnetically-shielded 2-way centre and rear speakers Maximum power: 130 W

S-EU5BS-LR

• Maximum power: 130 W

- Dimensions (W x H x D): 381 x 130 x 153 mm (centre)/130 x 203 x 153 mm (rear)
- Weight: 3.4 kg (centre)/1.9 kg (rear)

· Magnetically-shielded 2-way speakers

· Lightweight, high-rigidity glass-fiber cone

• Dimensions (W x H x D): 130 x 203 x 153 mm

· Impedance: 8 ohms



S-EU8BS-LR

EURO

A sleek 2-way speaker system featuring sophisticated 2-way bookshelf speaker system featuring sophisticated European design and highly-rigid wooden enclosures European design

- · Magnetically-shielded 2-way speakers
- · Kevlar® brand fiber cone woofers
- Maximum power: 130 W
- Dimensions (W x H x D): 190 x 350 x 300 mm
- · Weight: 7.3 kg
- · Impedance: 6 ohms



CP-EU5

· Impedance: 8 ohms

· Weight: 1.9 kg

EURO

EURO

Speaker Stands

CP-EU8

• Designed especially for the S-EU8BS-LR speaker system



EURO

Speaker Stands

 Designed especially for the S-EU5BS-LR speaker system



EURO

S-EU2 Series

S-EU2TB-LR

EURO

Compact, full-range centre/rear speakers featuring

· Magnetically-shielded 3-way tall-boy speakers

Stylish 3-way tall-boy front speaker

system featuring European design

- 14 cm cone woofer
- 7 cm cone midrange
- 2.5 cm dome tweeter • Maximum power: 80 W
- · Dimensions (W x H x D):
- 183 x 909 x 233 mm
- · Weight: 8.1 kg
- Impedance: 8 ohms



S-EU2CR

sophisticated European design

- Full-range centre and rear speakers
- 8.3 cm cone speaker
- Magnetically shielded (centre)
- Maximum power: 80W
- Dimensions (W x H x D): 220 x 110 x 82 mm (centre)/
- 110 x 110 x 82 mm (rear) · Weight: 1.0 kg (centre)/0.56 kg (rear)
- · Impedance: 8 ohms



· 3-way bass-reflex floor-standing front speakers with: - 20 cm cone woofer

speakers

- 8 cm cone midrange

S-MS700

- 4 cm cone tweeter
- · Full-range 10 cm cone centre and rear speakers
- · Magnetically-shielded
- Maximum power:
- 150 W (front), 120 W (centre/rear & rear centre)
- · Dimensions (W x H x D):
- 240 x 1000 x 250 mm (front) 350 x 130 x 140 mm (centre)
- 180 x 130 x 140 mm (rear & rear centre)

Multi-Channel Surround Package

· Weight: 12.7 kg (front), 2.5 kg (centre), 1.3 kg (rear & rear centre)

High power surround package including 3-way tall-boy

speakers and full-range centre/rear & rear centre

- · Impedance: 8 ohms
- * Available in certain Asian countries only



· 3-way bass-reflex floor-standing front speakers with:

High-power surround package including 3-way bass-reflex

- 20 cm cone woofer
- 8 cm cone midrange
- 4 cm cone tweeter
- · Full-range 10 cm cone centre and rear speakers
- · Magnetically-shielded
- Maximum power
- 150 W (front), 120 W (centre/rear)

S-MS500 MKII

- Dimensions (W x H x D): 240 x 900 x 250 mm (front)
- 350 x 130 x 140 mm (centre)
- 180 x 130 x 140 mm (rear)
- · Weight: 10.7 kg (front), 2.5 kg (centre), 1.3 kg (rear)
- · Impedance: 8 ohms
- * Available in certain Asian countries only





European Design Powered Subwoofers

S-EW2

EURO

(Front Speakers)

Down-firing powered subwoofer featuring elegant European design and even deeper bass

- Maximum power: 85 W
- 16 cm woofer for reproducing even deeper bass
- · Magnetically-shielded speaker system
- Dimensions (W x H x D): 300 x 375 x 380 mm
- Weight: 11.5 kg



S-EW5

Down-firing powered subwoofer featuring elegant European design and superior sound

- Maximum power: 100 W
- 20 cm woofer for reproducing deep bass
- · Special signal-processing method for faithful reproduction of sound without phase lag
- · Cone-shaped diffuser for delivering highquality sound in all horizontal directions

Magnetically-shielded speaker system

- · Front controls for enhanced ease of use
- Auto power on/off
- · Dimensions (W x H x D): 350 x 410 x 397 mm

Weight: 17.9 kg

Download from Www.Somanuals.com. All Manuals Search And Download.

0



Pioneer Pure Malt Speakers

An environmentally-friendly 2-way speaker system featuring enclosures made of recycled white oak whiskey barrels

S-A4SPT-VP S-A4SPT-PM



recycled white oak whiskey barrels

• 2.5 m OFC (oxygen-free copper) speaker

• Frequency range: 50 Hz-40 kHz (S-A4SPT-VP),

Dimensions (W x H x D): 154 x 246 x 213 mm







10 cm TAD Pulp Cone Woofer (S-A4SPT-VP)



· Weight: 3.7 kg · Impedance: 6 ohms

10 cm cone woofer

• 2 cm dome tweeter

• Maximum power: 100 W

60 Hz-40 kHz (S-A4SPT-PM)

cable included

- High-Grade Speaker Terr

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com