

Elite Series

Vandal-Resistant Dome Color Cameras

EV-2605-NKEQ 2.8~11.0mm Varifocal Lens, True Day/Night

EV-2606-NJEQ 3.8~9.5mm Varifocal Lens, True Day/Night, 36 IR LEDs (up to 100' range)

EV-2615-NKEQ 2.8~11.0mm Varifocal Lens, Digital Noise Reduction (DNR)

EV-2625-NKEQ 2.8~11.0mm Varifocal Lens, Wide Dynamic Range (WDR)



Day Night

EV-2605-NKEQ

- ▶ True Day/Night Operation
- ▶ 1/3" Sony Super HAD
- ▶ 550 TV Lines
- ▶ Mechanical IR cut filter



Day Night

EV-2606-NJEQ

- ▶ 36 IR LEDs
- ▶ 1/3" Sony Super HAD
- ▶ 550 TV Lines
- ▶ Mechanical IR cut filter



DNR

EV-2615-NKEQ

- ▶ Digital Noise Reduction
- ▶ 1/3" Sony Super HAD
- ▶ 520 TV Lines
- ▶ On-screen display



WDR

EV-2625-NKEQ

- ▶ Wide Dynamic Range
- ▶ 1/3" Pixim DPS Image Sensor
- ▶ 540 TV Lines
- ▶ On-screen display

All Cameras Incorporate the Following Outstanding Features:


- ▶ Varifocal lens can cover a wide area or focus in on a specific target
- ▶ 360° triple-axis rotation
- ▶ Surface or flush mountable
- ▶ Vandal-resistant and weatherproof
- ▶ Dual Voltage: 12VDC or 24VAC
- ▶ Iris control adjustment built-in
- ▶ Easy adjustment of zoom and focus
- ▶ Service monitor port
- ▶ Corner and Wall Mounts available

Table 1: Model Comparison:

For a complete list of technical specifications please see Tables 2 and 3.

Model Number	EV-2605-NKEQ	EV-2606-NJEQ	EV-2615-NKEQ	EV-2625-NKEQ
Image sensor	1/3" Sony Super HAD CCD			1/3" Pixim DPS
Resolution	550 TV lines		520 TV lines	540 TV lines
Pickup elements	768 x 494 pixels			720 x 540 pixels
Varifocal lens	2.8~11.0 mm	3.8~9.5 mm	2.8~11.0 mm	2.8~11.0 mm
Minimum illumination	0.03 lux / F1.2	0 lux IR LEDs on	.002 lux / F1.2	.08 lux / F1.2
Power consumption @ 24VAC	Max. 4.8Watts	Max: 12Watts	Max. 5.5Watts	Max. 4.8Watts
Power consumption @ 12VDC	Max. 250mA	Max: 650mA	Max: 220mA	Max: 240mA

Easy to Use Zoom and Focus Adjustment

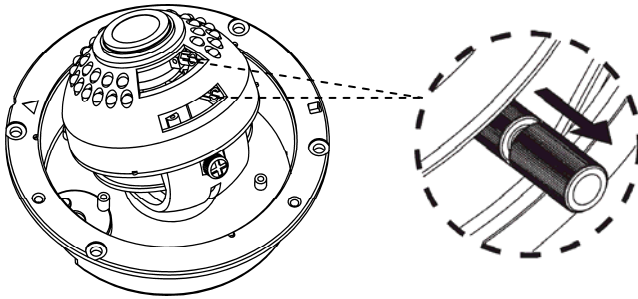

The ENFORCER EV-2606-NJEQ and EV-2605-NKEQ feature a unique zoom and focus adjustment system. Two levers, one for zoom and one for focus extend from the camera to smoothly and precisely adjust the focal length and depth.

Mounting Brackets

The EV-260CM Ceiling-Mount Bracket and EV-260WM Wall-Mount Bracket are designed to easily mount the ELITE Series of Vandal-Resistant Color Dome Cameras:

Ceiling-Mount
Bracket
EV-260CM




Wall-Mount
Bracket
EV-260WM



On-screen Display and Included Remote Control:

The EV-2615-NKEQ and EV-2625-NKEQ feature an included remote control for programming the cameras via the on-screen display:



On-Screen Display
Main Menu



Included Remote Control

Both cameras programming features can be fully customized depending on lighting conditions:

- ▶ Digital slow shutter
- ▶ Digital noise reduction
- ▶ Manual or automatic gain control
- ▶ Manual or automatic backlight compensation
- ▶ Lens, brightness, and sharpness adjustments

Wide Dynamic Range (WDR)

The ENFORCER EV-2625-NKEQ is the ideal solution to protect areas in difficult lighting conditions. Locations with lighting difficulties such as extreme overexposure or underexposure can be clearly seen.

Typical Underexposure



Wide Dynamic Range



DIGITAL
PIXEL[®]
SYSTEM
FROM PIXIM

Digital Noise Reduction (DNR)

The ENFORCER EV-2615-NKEQ protects areas in the worst of lighting conditions. Programmable Digital Noise Reduction, Gain Control, and Digital Slow Shutter provide video images in almost total darkness.

Typical Day/Night Camera rated at 0.1 lux



EV-2615-NKEQ rated at 0.002 lux



Actual comparison photos. Taken 15 minutes before sunrise.

Table 2: Specifications

Model Number	EV-2605-NKEQ	EV-2606-NJEQ
Varifocal lens	2.8-11.0 mm	3.8-9.5 mm
Minimum illumination	0.03 lux / F1.2	0 lux IR LEDs on
Power consumption @ 24VAC	Max. 4.8Watts	Max: 12Watts
Power consumption @ 12VDC	Max. 250mA	Max: 650mA
Image sensor	1/3" Sony Super HAD CCD	
Resolution	550 TV lines	
Pickup elements	768 x 494 pixels	
Sync	Internal	
Video output	1 Vp-p composite output, 75 Ohms.	
Shutter speed	1/60 sec.	
Iris control	DC auto iris	
Gain control	Auto	
Gamma correction	0.45	
White balance	ATW /AWC selectable	
Backlight compensation	ON/OFF selectable	
S/N ratio	> 48dB (AGC off)	
Power source (+/-10%)	24VAC or 12VDC	
Ambient temperature	-14° ~ 122° F (-10° ~ 50° C)	
Weight	4 lbs. 6 oz. (2.0 kg)	
Dimensions	5 ¹¹ / ₁₆ " x 4 ¹ / ₁₆ " (145 x 103mm)	

Table 3: Specifications

	EV-2615-NKEQ	EV-2625-NKEQ
Image sensor	1/3" Sony Super HAD CCD	1/3" Pixim DPS Image Sensor
Resolution	520 TV lines color, 540 TV lines B/W	540 TV lines
Pickup elements	768 x 494 pixels	720 x 540 pixels
Wide dynamic range (WDR)	N/A	Normal - 102dB, Max. - 120dB
Digital noise reduction	High / Middle / Low / OFF	ON/OFF
Shutter speed	x128 speed - 1/60 ~ 1/120,000 sec	1/60 ~ 1/30,720 secs.
Minimum illumination	0.002 Lux	0.4 Lux color, 0.08 Lux DSS ON
Power consumption @ 24VAC	Max. 5.5VA	Max. 4.8VA
Power consumption @ 12VDC	Max: 220mA	Max: 240mA
Varifocal lens	2.8 ~ 11.0 mm	
Digital slow shutter (DSS)	OFF, ON: 2x ~ 32x	
On-screen display (OSD)	Built-in	
Sync	Internal	
Iris control	DC auto iris	
Gain control	Auto	
White balance	ATW / AWC / Manual	
Video output	1 Vp-p composite output, 75 Ohms.	
S/N ratio	> 50dB (AGC off)	
Power source (+/-10%)	24VAC or 12VDC	
Ambient temperature	14° ~ 122° F (-10° ~ 50° C)	
Weight	4 lbs. 6 oz. (2.0 kg)	
Dimensions	5 ¹¹ / ₁₆ " x 4 ¹ / ₁₆ " (145 x 103mm)	

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>