



# FoodPro™

Raytek FoodPro Series of Food Safety Thermometers

Food Safety Thermometers



## The Raytek Food Temperature Team

Foodservice professionals understand the need for complete temperature monitoring of food products. Raytek FoodPro™ thermometers provide temperature measurement solutions for quick surface scans and essential internal measurements.

- Quickly scan surface temperatures without risk of cross-contamination
- HACCP Check temperature monitoring to instantly spot potentially unsafe temperatures
- Hand washable
- Verify internal temperature measurements\*
- Easily monitor cooking, cooling and holding times\*

*\*FoodPro Plus™ unit only*

FoodPro Plus™

*The Last Word*

FoodPro™

*The First Line of Defense*

**M**onitoring temperature is essential to keeping food safe, and is required by the Food and Drug Administration (FDA). Regular monitoring of temperatures and adherence to food safety guidelines make for better business—increasing food safety and reducing food waste. The combination of both Raytek FoodPro thermometers provides a complete temperature measurement and monitoring solution for foodservice professionals. It's fast and easy for kitchen staff to adhere to FDA regulations and HACCP guidelines with the HACCP Check in both units. Keep a FoodPro Plus thermometer handy to round out your HACCP practices, using the probe for internal temperatures, and the timer to monitor exposure times.



## HACCP Guidelines

HACCP (Hazard Analysis Critical Control Points) guidelines are recommended by the FDA for food service professionals and institutions to help detect unsafe food conditions<sup>1</sup>. Food temperatures are a known indicator of food quality, but HACCP standards also examine food exposure times. HACCP programs incorporate the temperature at which a product should be stored, cooked, or cooled, as well as the length of time food products can safely remain at these temperatures.

**For more information on HACCP and Raytek instruments, visit [www.raytek.com/food](http://www.raytek.com/food)**

*<sup>1</sup>U. S. Department of Health and Human Services, Public Health Service, Food and Drug Administration, 1997 Food Code, Annex 5: HACCP Guidelines*

## HACCP Check




The HACCP Check “Go/No-Go” lights show immediately if temperatures are within HACCP guidelines for safe hot or cold food holding.

A green light indicates safe hot and cold holding temperatures, while potentially dangerous food temperatures trigger a red light.

Investigate further with a probe thermometer for internal temperatures.

## Accurate Target Sighting

It's easy to see what you are measuring with FoodPro thermometers. Both products feature a unique targeting system that illuminates the area being measured. What you see is what you get—no more guesswork!

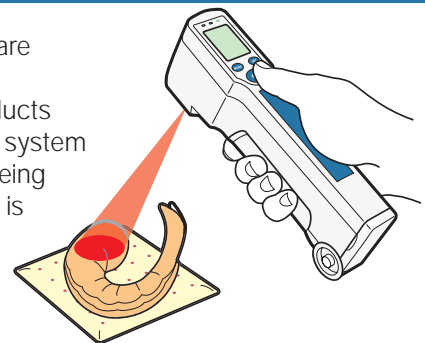

## Easily Washable




Cleanup is quick and easy—just wipe and sanitize.

## FoodPro Thermometer: *The First Line of Defense*



The Raytek FoodPro thermometer is the first line of defense against risky temperatures. A noncontact, instant HACCP temperature scanner, the FoodPro unit quickly measures food surface temperature and signals "safe" or "unsafe" readings with green or red HACCP Check lights. The FoodPro unit is easy to use and is a reliable tool for every foodservice worker. Together, the FoodPro and FoodPro Plus thermometers are a complete temperature measurement solution.




**Scan**




## FoodPro Plus Thermometer: *The Last Word*




The Raytek FoodPro Plus thermometer combines the best temperature measurement technologies into one easy-to-use tool. It features instant noncontact scanning for measuring surface temperatures, and a built-in, flip-down probe thermometer for taking internal temperature measurements. The HACCP Check indicates at a glance whether food temperatures are in safe ranges, and the integrated timer helps monitor cooking, cooling and holding times. The dual-mode measurement system, built-in HACCP Check, and integrated timer make the FoodPro Plus the professional's tool of choice in a food safety thermometer.



**Scan**



**Probe**



**Timer**



Infrared Thermometer	Temperature Range	-35°C to 275°C (-30°F to 525°F)
	Accuracy (Assumes ambient operating temperature of 23°C ±2° (73°F ±4°F))	Between 0°C and 65°C (32°F to 150°F): ±1°C (±2°F) Below 0°C (32°F): ±1°C (±2°F) ±0.1 degree/degree Above 65° (150°F): ±1.5% of reading
	Response Time	<500ms after initial reading
	Spectral response	8-14 microns
	Emissivity	Pre-set for foodservice applications
	Distance to Spot Size/ Optical Resolution (D:S)	2.5:1 @ 90% energy, typical
	Typical Working Range (Target Illumination)	≈25mm to 250mm (≈1" to 10")
	Minimum Target Size Illumination to IR Channel Offset	12mm (0.5") Ø 13mm (0.52")
Probe Thermometer	Temperature Range	-40°C to 200°C (-40°F to 390°F)
	Accuracy (Assumes ambient operating temperature of 23°C ±2° (73°F ±4°F))	Between -5°C and 65°C (23°F to 150°F): ±0.5°C (±1°F) Below -5°C (23°F): ±1°C (±2°F) Above 65°C (150°F): ±1% of reading
	Response Time	7-8 seconds (3 time constants)
	Probe Dimensions	Diameter: 3.0mm (0.118") Length: 80mm (3.0")
	Sensor Type	Thin-film Platinum, Class A, Resistance Thermal Device (RTD)
	Repeatability	Within the accuracy specifications of the unit
	Ambient Operating Range	0°C to 50°C (32°F to 122°F)
	Relative Humidity	90% (±5%) RH noncondensing @30°C (86°F)
	Storage Temperature	-20°C to 60°C (-4°F to 140°F)
	Weight/Dimensions (with Battery)	150g (0.33lbs) 165mm x 32mm x 50mm (6.5" x 1.25" x 2")
	Power	9V Alkaline
	Battery Life (Alkaline)	10 hours minimum @ 23°C (73°F)
	Target Illumination Light	High Brightness LED
	Display Hold (7 seconds)	✓
	LCD Backlit Display	✓
	Temperature Display	4 digits, 0.1°C resolution (0.2°F)
	Standards	Conforms to EN 61326-1 Electromagnetic Emissions and Susceptibility, EN 61010-1 General Safety
Certifications	CE	
Warranty	1 year*	
Included Options/Accessories	Battery, Carrying Pouch, User's Manual, Quick Start Guide Replacement Probe	

\*US only. Warranty duration may vary by country.

Raytek Corporation  
Worldwide Headquarters



1201 Shaffer Rd. PO Box 1820  
Santa Cruz, CA 95061-1820 USA  
Tel: 1 800 866 5478  
1 831 458 1110  
Fax: 1 831 425 4561  
solutions@raytek.com

To find a Raytek office near you please visit [www.raytek.com](http://www.raytek.com)

#### Worldwide Service

Raytek offers services including emergency repairs and calibration. For more information, contact your local office or e-mail: [support@raytek.com](mailto:support@raytek.com)

© 2004 Raytek Corporation 1-2101 Rev. C 8/04 Raytek and the Raytek Logo are registered trademarks and FoodPro and FoodPro Plus are trademarks of Raytek Corporation. Specifications subject to change without notice.

[www.raytek.com](http://www.raytek.com)  
for up-to-the-minute features

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>