



J20L743 20" LCD Healthcare Monitor-Receiver



Thin 2.6"
Cabinet Design



Pillow Speaker
Compatible



UL Healthcare
Listed



Channel Labeling



Safety Plug

For more information, call 1.800.333.7221.

Download from www.Somanuals.com. All Manuals Search And Download.

J20L743 LCD



Picture Technology

| | |
|-----------------------------------|-----------|
| Tuner | NTSC |
| Category | LCD |
| Display Type | TFT LCD |
| Screen Size | 20" |
| Display Aspect Ratio | 4 x 3 |
| Display Resolution | 640 x 480 |
| Brightness (cd/m2) | 450 |
| Contrast Ratio | 500 : 1 |
| Viewing Angle Horizontal/Vertical | 160 / 140 |
| Response Time | 16 ms |

Sound Technology

| | |
|--|-------------------------|
| Broadcast Stereo Sound | |
| SAP (secondary audio program) where available | |
| Audio Power front speakers | 1.7 watts / channel x 2 |
| Headphone Adjustments | |

Convenience Features

Slim Cabinet Design allows for easy wall mounting and minimizes space requirements.

Pendant Jack features special healthcare isolation for optional pillow speakers, nurse-call units and bedside remote controls to provide the utmost in patient convenience and safety. Conforms to UL 6500 Annex H.

Channel Labeling allows for onscreen display of both network affiliation and channel number.

Front Bottom Panel Controls provide convenient access for healthcare staff to turn set on/off or adjust channels.

Multilingual On-Screen Display provides English and Spanish versions of all on-screen menus.

Closed Captioning provides added convenience for hearing impaired patients.

On-Screen Clock eliminates the need for separate wall of desk equipment.

Sleep Timer automatically turns set off at predetermined time.


Wake Timer automatically turns set on at predetermined time.

Audio In PC Mode allows for attachment of personal computer audio devices.

Specifications

- Inputs:** RF Input • Composite Video Input
• Audio Input for Composite
• Dsub15 VGA • Audio Input for Dsub 15 VGA
• Component Video Input (YCrCb/YPrPb)
• Audio Input for Component Video

Outputs: Pendant Jack • Headphone Jack

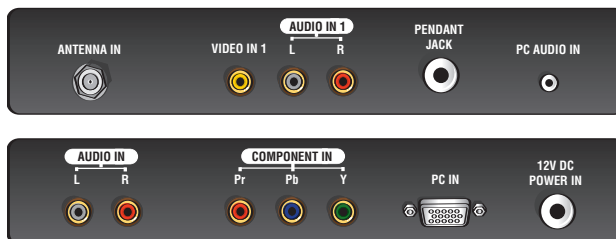

Power: Hospital grade power cord with 3-prong grounded safety plug

Power Requirements: 120VAC (+/-)10%, 60Hz

Power Consumption: Stand-by: less than 3 watts

Cabinet: Construction: high-impact flame-retardant polystyrene
Finish: dark gray
Dimensions: 16.7"H, 22.1"W, 2.6"D
VESA mounting compatible: 75 x 75 hole pattern

Weight: Product 16.5 lbs./Shipping 23.2 lbs.

Certification: UL Healthcare Listing

Limited Warranty: 1 year parts and labor

This television receiver provides display of television closed-captioning in accordance with §15.119 of the FCC rules. This television does not support color attributes of television closed-captioning.



©2006 TTE Technology, Inc.
www.rca.com/rcacommercial • Phone: 1-800-333-7221

Commercial Sales and Distribution • MS INH605
101 West 103rd Street • Indianapolis, Indiana 46290-1024

Printed in U.S.A. 4/06-5M
TV pictures simulated. Specifications subject to change without notice.
RCA and associated marks are trademarks of THOMSON S.A. used under license to TTE Corporation.



LISTED BY
FOR HEALTHCARE USE

J20L743-H-O

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>