



Healthcare

J20542

20" Monitor-Receiver

UL Hospital Listed
"Energy Star" Certification
High-Performance Video System
with up to 539 LOR
Secondary Audio Program (SAP)
Sound Logic™ Audio Leveler
Volume Limiter and Initial Volume
181-Channel Tuning**
Channel-Guide with One-Button Access
Closed-Captioning with
"Caption Vision"
126 Custom 8-Character Channel Labels
Optional Remote with
TV1/TV2 Capability
English/French/Spanish Menus
and Displays
Initial Channel, Channel Lists,
Channel Hold
Power Provisions for
Third-Party Modules
Digital Serial Communications
Interface (DSCI)
Configuration Menus with
Non-Volatile Memory
Selectable Weak Signal Muting
Selectable Clock and Scheduler
Selectable Automatic Turn-off
IR and Wired Cloning Capabilities
Pendant Jack
Rear A/V Jacks
LED Power Indicator
Front Panel Lockout
Configurable "V-Chip Technology"
De-Commercialization
Commercial Warranty



Energy Star
Certified



Pillow Speaker
Compatible



ClonePRO™
Programming



One-Button
Channel Guide



8-Character
Channel Labeling



Clear Safety Plug

www.rcacommercial.com

Picture

High-Performance Video System with advanced circuitry to deliver outstanding picture performance, with up to 539 lines of horizontal resolution*

Sound

SAP (secondary audio program) where available

Sound Logic™ Audio Leveler eliminates sound blasts during commercial breaks, maintaining a more consistent overall audio level

Volume Limiter and Initial Volume establish maximum and consistent initial volume settings each time television is turned on

Commercial Features

181-Channel Tuning for a wide range of options using off-air, satellite/cable or internally generated program signals**

Channel-Guide with One-Button Access for an on-screen listing of all available channels and their identification labels

8-Character Channel Labeling allows for on-screen display of both network affiliation and channel number

Optional Remote with TV1/TV2 Capability allows simultaneous control of two monitors in the same room

"Energy Star" Certification saves energy costs

Power Provisions for Third-Party Modules eliminate the need for wall-transformers, wiring snarls and "set-top" boxes

Digital Serial Communications Interface (DSCI) allows third-party interactive systems to monitor and control television with optimal performance and efficiency

Pendant Jack features special healthcare isolation for optional pillow speakers, nurse-call units and bedside remote controls to provide the utmost in patient convenience and safety. Conforms to UL1492

Configuration Menus with Non-Volatile Memory for site-specific specifications and limitations on how televisions can be operated and retained, even when power is lost

Selectable Weak Signal Muting mutes audio, blanks video and provides an on-screen message if signal is weak or lost

Selectable Clock and Scheduler with automatic time set allows TV signal to automatically set time (where available); scheduled turn on/off events can be one-time or recurring

Selectable Automatic Turn-off permits television to turn off automatically after a period of inactivity

IR and Wired Cloning Capabilities allow rapid duplication of configuration information between televisions for ease of installation and maintenance


Front Panel Lockout prevents tampering

Decommercialization facilitates after-market resale and allows television investment recovery at the end of service life

Technical Specifications

Lines of Horizontal Resolution: 539*

Inputs: Audio (mono)
Video
RF Coax
Pendant Jack for pillow speakers
DSCI Port for interactivity

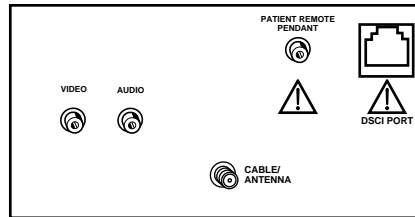

Power Cord: 6-foot, 3-prong clear plug

Power Requirements: 120VAC (+/-)10%, 60Hz

Power Consumption: Stand-by: less than 3 watts (Energy Star Certified)
Operating: 90 watts

Cabinet: Construction: high-impact flame-retardant polystyrene
Finish: textured black
Dimensions: 19 1/8"H, 20 1/4"W, 18 7/8"D

Shipping Weight: 54 lbs. (approximate)

Certification: UL Healthcare Listing

Limited Warranty: 1 year parts and labor, 2 years picture tube

* Lines per picture width based on EIA measurement criteria.

** Check your cable company's compatibility requirements.

*** This television receiver provides display of television closed-captioning in accordance with §15.119 of the FCC rules. This television does not support color attributes of television closed-captioning.

Optional Accessories

CBX203 ClonePRO™ Remote

This unique accessory developed by RCA significantly reduces installation and programming time, allowing you to program one television and then transfer the same data to all similar sets in just seconds. The more RCA televisions you install, the more efficiency you gain.



Hospital Jumper Cables

Connects television pendant jack to hospital wall plate, providing use with pillow speakers.
(JTA343 1/4" to 1/4", JTA345 1/4" to 5-pin, JTA346 1/4" to RJ24)

Remote Controls

The User Remote provides easy access to television features with both the channel and scan buttons. The Master Remote maintains control of all setup menus, including audio and video functions.



COMMERCIAL PRODUCTS

©2002 Thomson Inc.

www.rcacommercial.com • Phone: 1-800-333-7221

Commercial Sales and Distribution • MS INH305
10330 North Meridian Street • Indianapolis, Indiana 46290-1024

Trademark(s) © Registered Marca(s) Registrada(s) Printed in U.S.A. 12/02-5M
TV pictures simulated Specifications subject to change without notice.



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>