

FURY GAS WATER HEATERS



- ▶ 6-year limited tank warranty*
- ▶ 1-year limited parts warranty*

Guardian System™

- One-of-a-kind air/fuel shut-off device offers double protection
- Maintenance free – no filter to clean
- Standard replacement parts

Easy to Light

- No matches required

Energy Efficient

- More hot water at low operating cost

High Altitude Compliant

- All models are certified for applications up to 4,500 feet above sea level

Longer Life

- Magnesium anode rod protects the tank from rust

Plus...

- Temperature and pressure relief valve is included
- Low profile drain valve
- Meets or exceeds NRCan requirements

Best Reputation. Superior Technology.



* See residential warranty information brochure for complete warranty information.

* May 1, 2004 – 5 year limited warranty in the Province of Newfoundland.



DESCRIPTION MODEL NUMBER	FEATURES					ROUGHING IN DIMENSIONS (SHOWN IN INCHES)								ENERGY INFO.	
	GAS INPUT IN THOUS. BTU/HR.		RECOVERY IN G.P.H. 100° RISE		FIRST HOUR DEL. G.P.H.	HT. TO VENT	TANK HT.	DIAM.	HT. TO GAS CONN.	VENT SIZE	WATER CONN. CNTR.	HT. TO SIDE T&P	WATER CONN.	SHIP. WT. (LBS)	ENERGY FACTOR NAT.
	NAT.	LP	NAT.	LP	NAT.	A	B	C	D	E	F	G	H		
RR30-30FV	30	27	25.5	22.9	49	49-3/4	46-1/4	19-3/4	14-1/2	3	8	40-1/4	3/4	98	.61
RR40-36FV1	36	34	30.5	28.8	72	53-1/8	49-3/8	20-1/4	14-1/2	3-4*	8	42-3/4	3/4	130	.59
RR50-40FV1	40	36	34	30.5	84	54-1/4	50-1/2	22-1/4	14-1/2	3-4*	8	44	3/4	160	.58

SPECIFY LP GAS WHEN ORDERING. Add "P" suffix to the model number and change BTU input. Example: RR30-27PFV.

* RR40-36FV1 and RR50-40FV1 feature a 3-4" combo vent.

These units are designed to meet or exceed ANSI (American National Standards Institute) requirements and have been tested according to C.S.A. test procedures and meet or exceed the energy efficiency requirements of NRCan, ASHRAE standard 90, and all government energy efficiency performance criteria for energy consuming appliances.


Before purchasing this appliance, read important energy cost and efficiency information available from your supplier.

Rheem Guardian System Features...




Exclusive Combustion Shut-off System

Should a spill incident occur, the Guardian System shuts off the gas supply and the air supply preventing a sustained vapour burn in the combustion chamber.




Flame Arrestor Plate

A specially-designed flame arrestor prevents ignition of vapours outside the combustion chamber.



Maintenance Free

Superior air filtration prevents the flame arrestor from becoming clogged by lint, dust and oil.

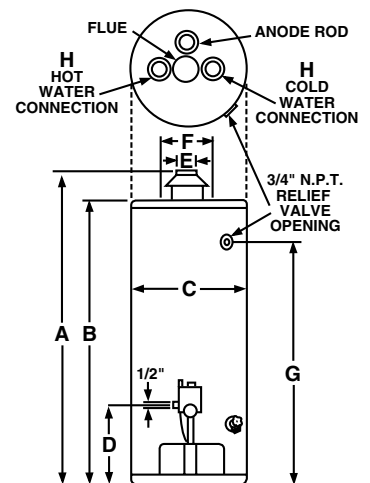

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Manufacturing Company • Water Heater Division
Rheem Canada Ltd./Ltée, 128 Barton Street West, Hamilton, Ontario L8N 3P3

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>