


<b>Type of Appliance</b>	Temperature controlled, continuous flow, gas hot water system
<b>Rinnai Model Number</b>	REU-VA2528FFUD(A)-UC
<b>Operation / Exhaust System</b>	Forced combustion / Direct vent
<b>Minimum/Maximum Gas Rate (Input)</b>	15,000 - 180,000 BTU/h (Natural Gas and Propane)
<b>Electrical</b>	Appliance: AC 120 Volts - 60 Hz Controller: DC 12 Volts
<b>Electrical Consumption</b>	Normal 65 watts Standby 2.0 watts Anti-frost protection 100 watts
<b>Ignition System</b>	Direct electronic ignition
<b>Hot Water Capacity</b>	0.6 to 7.5 GPM (35° F rise)
<b>Temperature</b>	98° - 120° F (factory default) Maximum temperature is selectable at 120° F or at 140° F; 98° - 160° F available with the MCC-91 controller for commercial and hydronic applications
<b>Temperature (without remote)</b>	120° F (factory default)
<b>Approved Gas Types</b>	Natural or Propane (ensure unit matches gas type)
<b>Installation</b>	Indoor only
<b>Energy Factor</b>	Natural Gas: 0.82 Propane: 0.82
<b>Thermal Efficiency</b>	Natural Gas: 84% Propane: 84%
<b>Service Connections</b>	Gas supply: 3/4 inch MNPT Cold water inlet: 3/4 inch MNPT Hot water outlet: 3/4 inch MNPT
<b>Water Flow Control</b>	Water flow sensor, electronic water control device and fixed by-pass
<b>Minimum/Maximum Water Supply Pressure</b>	20 - 150 PSI (recommended 30-80 PSI for maximum performance)

**FLOW TABLE**

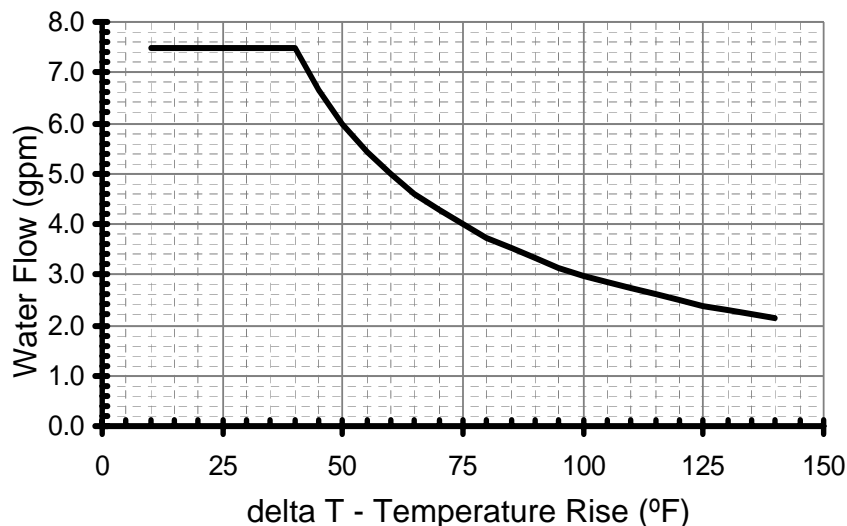

### Water Temperature Control

#### Controller

Simulation feed forward and feedback

MC-91-1US (part of the front panel)  
 Deluxe controller: MC-100V-1US (optional)  
 Bathroom controller: BC-100V-1US (optional)  
 Wireless controller: MC-502RC-1US-MS (optional)  
 MCC-91-1US (for commercial applications)

#### Controller Cable

Non-polarized two-core cable, minimum 22 AWG

#### Safety Devices

- Flame failure - Flame Rod
- Boiling protection
- Combustion fan rpm check
- Over current - glass fuse (3 amp)
- Remaining flame (OHS)
- Thermal fuse
- Automatic frost protection

#### Clearances from Combustibles (suitable for closet, attic, and crawl space installations)

- Top of heater - 6 inches
- Front of heater - 6 inches
- Sides of heater - 2 inches
- Back of heater - 0 inches
- Bottom of heater - 12 inches
- From vent pipe - 0 inches

#### Clearances from Non-combustibles

- Top of heater - 2 inches
- Front of heater - 6 inches
- Sides of heater - 1/2 inch
- Back of heater - 0 inches
- Bottom of heater - 12 inches
- From vent pipe - 0 inches

#### Min. / Max. Gas Supply Pressure

Natural Gas: min 5" W.C. max 10.5" W.C.  
 Propane Gas: min 8" W.C. max 13.5" W.C.

#### Manifold Gas Pressure (inches W.C.)

Natural Gas: high fire 2.7" W.C. low fire 0.52" W.C.  
 Propane Gas: high fire 4.4" W.C. low fire 0.92" W.C.


#### NOx

Meets California and Texas NOx Emission Rules

#### Warranty

Heat exchanger: 12 years\* for residential and 5 years\* for commercial and hydronic applications; (10 years\* if used with the Rinnai Hydronic Air Handler); all other parts 5 years\*; labor 1 year; (\* 3 years if used as a circulating water heater within a circulation loop, when the water heater is in series with a circulation system and all circulating water flows through the water heater)

*Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial and federal codes must be adhered to prior to installation.*

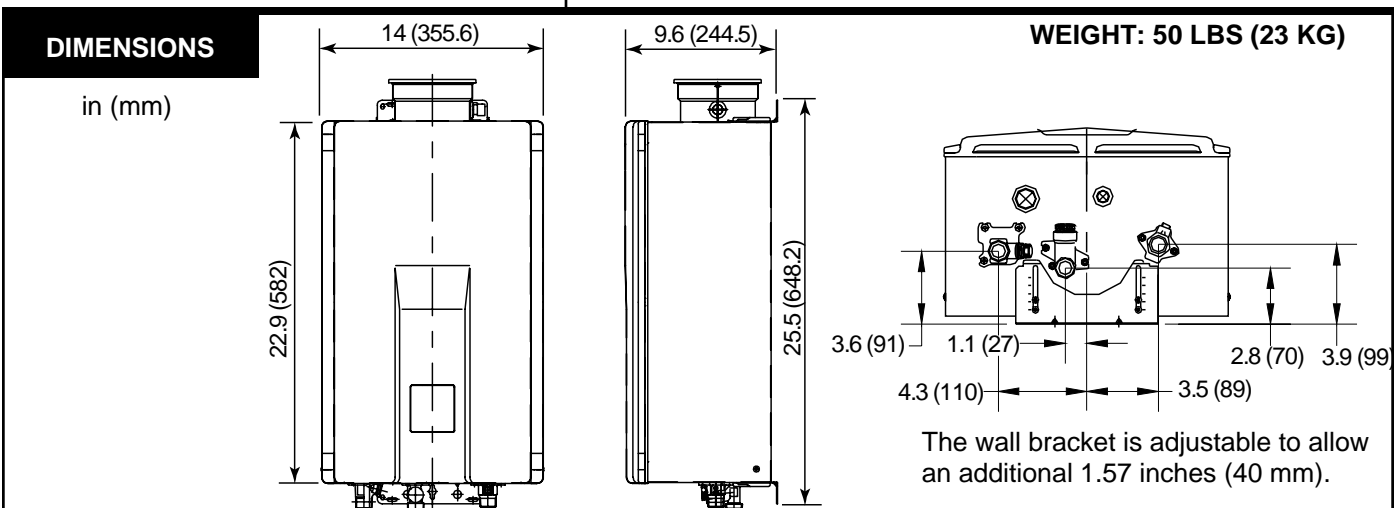

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>