



SSA-324

System-to-System Interface



The Model SSA-324 is a System to System Adapter (or interface). It interconnects the voice signals between different intercom systems. In addition, it can optionally interconnect "Calls" or tally signals between systems. Each SSA-324 includes two two-wire to four-wire converters. The four-wire interface can deliver and accept high level signals. An SSA-324 can also function as a two-wire to two-wire interface by interconnecting the two individual interfaces at the four-wire level. The SSA-324 does two voice channels when used as a dual two-wire to four-wire interface, and one voice channel when functioning as a two-wire to two-wire interface.

Features

Functional Specifications
 Ducking (Bilateral)
 Monitoring

Nulling
 Level Adjustments

Line Drawing

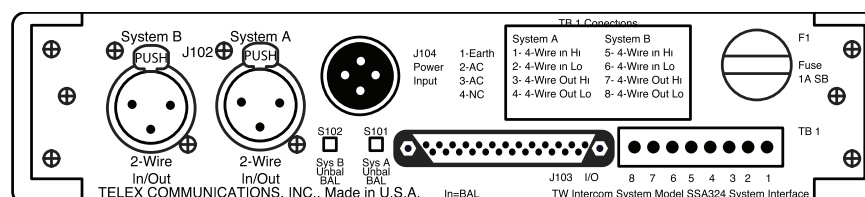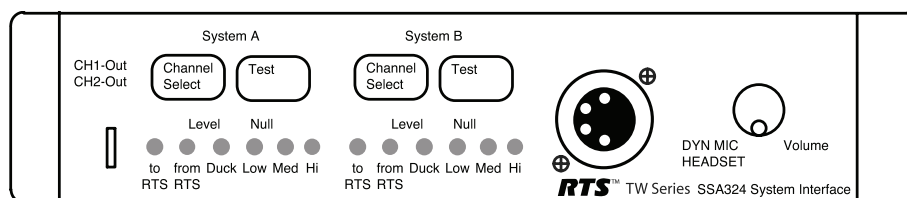

SSA-324 Specifications

Two-Wire Input

Impedance: 5,000Ω +1a%, -20% single ended, 10,000Ω +100%, -20% differential

Operating Levels: -20 dBu to +0 dBu, nominal

Two-Wire Output

Impedance: 5,000Ω 20% single ended, 10,000Ω 20% differential

Operating Level: 0.1 mA to 10 mA, nominal

Four-Wire Input

Impedance: 10,000Ω minimum single ended, 20,000Ω minimum differential operating Levels: -10 dBu to +8 dBu, nominal

Four-Wire Output

Impedance: single ended or differential

Operating Levels: -10 dBu to + 8 dBu, nominal

Transfer Functions (Duck Level set to no ducking)

Voltage Gain, Four-Wire In to Two-Wire Out*

Level Pot 100% rotation: 3 dB

Level Pot 50% rotation: -15 dB 4 dB

Transfer Functions (Duck Level set to no ducking)

Voltage Gain, Two-Wire In to Four-Wire Out**

Level Pot 100% rotation: 22 dB 3 dB

Level Pot 50% rotation: 8 dB 4 dB

Frequency Response (Reference: 1 kHz, 0 dBu input)

Four-Wire Input to Two-Wire Output: 200 Hz to 5 kHz, +1,-4 dB, typical

Two-Wire Input to Four Wire Output: 250 Hz to 5 kHz, +1, -4 dB, typical

Signal-to-Noise Ratio (Reference: 1 kHz, 0 dBu at two-wire)

Two-Wire to Four-Wire: -60 dB

Four-Wire to Two-Wire: -60 dB

Crosstalk (Reference: 1 kHz, 0 dBu)

System A to System B,

Two-wire to Two wire

200 Hz to 5 kHz: -50 dB,

Environmental

Temperature

Operating: 0.0 to 50° Celsius

Storage: -40° to 85° Celsius

Humidity: 0 to 95%. non-condensing

Mains Voltage

Standard: 120 volts 10%, 50-60 Hz

*P Option: 230 volts 10%, 50-60 Hz

#D Option: 100 volts + 10%. -5%, 50-60 Hz

Mains Amperes

Standard: 0.20A @ 120 volts 10%, 50-60 Hz

*P Option: 0.10A @ 230 volts 10%. 50-60 Hz

#D Option: 0.22A @ 100 volts +10%, -5%. 50-60 Hz

Dimensions

1.72" (44mm) high, 8.19" (208mm) wide, 8.00" (204mm) deep

Weight

SSA-324: 2.75 lbs (1.3 kg)

MCP-1: 1.0 lbs (0.45 kg)

MCP-2: 1.0 lbs (0.45 kg)

Finish

Thermoplastic front panel, aluminum case, light gray finish.

Nulling:

Manual

Contact Information

Telex Communications, Inc.
12000 Portland Avenue South
Burnsville, Minnesota 55337
Telephone: 877-863-4169
Fax: 800-955-6831

Form Number: LIT000031000

Date: April, 2006

Ordering Information

SSA-324

System-to-System Interface

Catalog Number: 9000697900

SSA-324#U

System-to-System Interface

Catalog Number: 9000697921

This specifications information is preliminary and is subject to change without notification.

Brand names mentioned are the property of their respective companies.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>