

# EZ View : 4Ch Real-time DVR *Plug & Secure!*

## SHR-1041K *NEW*




### Features


- Simple & Easy Installation
- Easy Backup (USB 2.0) & Easy User Interface
- Easy Connectivity with Any Monitor & TV (VGA, Composite)
- Dynamic Quad View: Single, Quad, Sequence
- Motion Detection
- Functional Cameras: Weather Resistant & Night Vision
- Eco-Friendly Compliance (ROHS)
- User Friendly Web Viewer

### Dimensions (unit:mm)

SHR-1041K

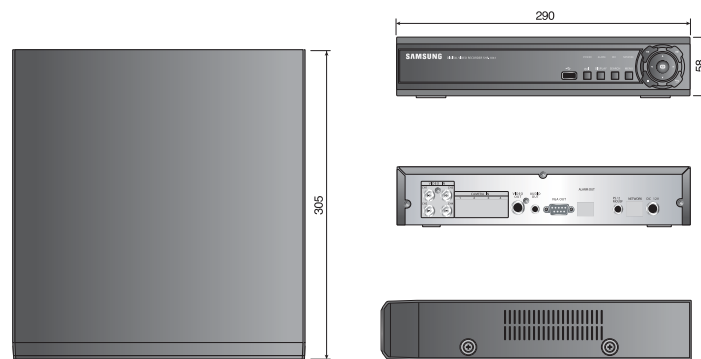

Weather Resistant Camera : SOC-C120

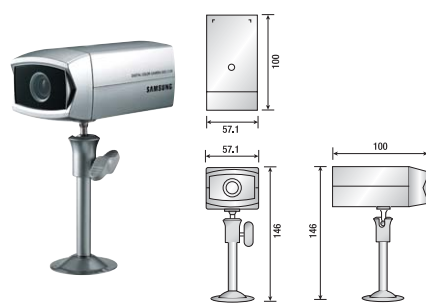

Night Vision Camera : SOC-N120



Night Vision Camera(Metal) : SOC-N121



### Specifications

<b>Model</b>	SHR-1041K
<b>Video Input</b>	4 Camera Inputs (RJ11 4EA, BNC 4EA)
<b>Video Output</b>	1 Composite Video Output(BNC), 1 VGA Main Monitor Output
<b>Audio</b>	MIC 4 Inputs (RJ11), 1 Output (RCA)
<b>Main Display</b>	120CIF/sec(NTSC), 100CIF/sec(PAL) 1/4/Sequential
<b>Motion Detection</b>	10 step sensitivity
<b>Alarm Input</b>	4 Alarm Inputs(RJ11)
<b>Alarm Output</b>	1 Alarm Outputs(Relay), Normally Open or Normally Closed Programmable
<b>PTZ</b>	1 RS-485
<b>User Interface</b>	English, French, and Spanish GUI with full mouse operation Keypad, Remote controller
<b>Recording</b>	MEPG-4(half-pel motion vector), G.711(64Kbps) NTSC : Max 120FPS(CIF), 60FPS(Half D1), 30FPS(D1) PAL : Max 100FPS(CIF), 50FPS(Half D1), 25FPS(D1) Channel independent recording setup for resolution, frame rate and quality Mode : Simple, Advanced(Manual, Motion, Alarm, Schedule, Panic) Schedule : 24 different recording configuration is possible in a day Various Video Quality (Highest/ High/ Standard/ Low) Pre-recording (max 5 sec)
<b>Play Back</b>	Search mode : Calendar/Timeline, Event/Log x1, x2, x4, x8, x16, x32, x64 1 / 4 multi screen playback
<b>Performance</b>	Triplex (Playback, Recording, Network)
<b>Archiving</b>	USB interfaced storage, Watermark
<b>Time</b>	GMT time zone, Auto DST, NTP support
<b>System</b>	Embedded Linux, Watch dog, Abnormal shutdown detection System auto recovery User group : admin, manager, guest F/W upgrade : USB
<b>Network</b>	RJ45, 10/100Mbps Up to 4 connection simultaneously DHCP, DDNS Bandwidth Management
<b>Remote Client</b>	Web Viewer
<b>Storage</b>	1 SATA up to 2 terabyte of internal storage Format / Write once / Overwriting
<b>Event</b>	Sensor / Motion / Video Loss / HDD failure Triggers recording, alarm out, e-mail notification, buzzer, video popup or log
<b>Interface</b>	1 High speed USB2.0 port (front) 1 RJ-45, 1 RS-485, 1 PS/2
<b>Power</b>	DC 12V / 4A Adaptor
<b>Operating Temperature</b>	0°C ~ 40°C (32°F ~ 104°F)
<b>Dimension</b>	280mm(W) x 305mm(D) x 60mm(H)
<b>Camera Cable Length</b>	100ft Guaranteed

Model	SOC-C120	SOC-N120
<b>Power Source</b>	DC 12V	
<b>Broadcasting</b>	NTSC	
<b>Image Device</b>	1/4 Inch IT S-HAD CCD	
<b>Effective Pixels</b>	525 lines	
<b>Scanning Method</b>	20 interlace	
<b>Line Frequency</b>	Horizontal : 15,734hz, Vertical 60hz	
<b>Weather Resist</b>	IP-42	
<b>Synchronization</b>	INT	
<b>Resolution</b>	320 TV Lines	
<b>S/N Ratio</b>	42db	
<b>Min. Scene</b>	2LUX	
<b>Illumination</b>		
<b>Electronic Shutter</b>	ELC	
<b>Signal Output</b>	Composite Video RJ11	
<b>Lens</b>	Focal Lengt:3.9mm Aperture(f):2.0	
<b>Operating Temperature</b>	0 ~ 40°C	
<b>Operating Humidity</b>	~ 90%	
<b>Dimension</b>	57(W) x 47.2(H) x 100.5(L)mm / 2.25(W) x 1.86(H) x 3.95(L)inch	
<b>Weight</b>	130g	
<b>Light Condition</b>		Light Sensor Auto Switching IR LED Control

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>