

High Resolution SmartDome Camera SCC-C6433/6435 **NEW**



Features

- 1/4" 410K/470K pixels CCD
- 32x optical zoom lens (16x D-zoom)
- High resolution : 540(Color) / 570(BW) TV Lines
- Day & Night
- Minimum scene illumination :
(SCC-C6433(P) : 0.002 Lux (15 IRE, Sens-up 256x, Color)
: 0.0002 Lux (15 IRE, Sens-up 256x, B/W)
SCC-C6435(P) : 0.001 Lux (15 IRE, Sens-up 256x, Color)
: 0.0001 Lux (15 IRE, Sens-up 256x, B/W)
- 128x(NTSC)/160x(PAL) WDR function (SCC-C6435(P) only)
- Full auto focus function • Privacy mask zone (16 area)
- Pan (max 400°/sec), Tilt (200°/sec)
- 360° endless pan (Slip-ring), 0~180° tilt
- RTC function for schedule setting
- Multi-protocol (more than 8 companies), multi-OSD

High Resolution

540(Color) / 570(BW) TV Lines
This camera has realized the high resolution 540 lines using the full digital image processing and special algorithm technologies.




480 TV Lines



540 TV Lines

Dimensions (unit:mm)

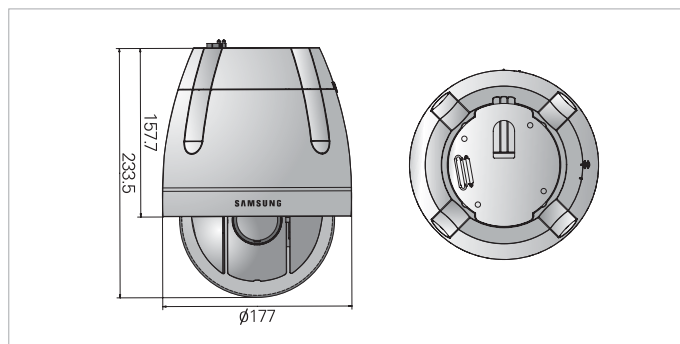


Specifications

Model	SCC-C6433(P)	SCC-C6435(P)		
Camera Type	Color			
Image	Device	1/4" Super HAD CCD	1/4" Ex-View HAD CCD	
	Effective Pixels	NTSC 768(H) x 494(V) PAL 752(H) x 582(V)	768(H) x 494(V) 752(H) x 582(V)	
Minimum Scene Illumination	Color	0.6 Lux(15IRE,Sens-up Off) 0.002 Lux(15IRE, Sens-up 256x)	0.3 Lux(15IRE,Sens-up Off) 0.001 Lux(15IRE, Sens-up 256x)	
	B/W	0.06 Lux(15IRE,Sens-up Off) 0.0002 Lux(15IRE, Sens-up 256x)	0.03 Lux(15IRE,Sens-up Off) 0.0001 Lux(15IRE, Sens-up 256x)	
PAN/TILT	Speed	Manual Pan	0.1~180°/sec	
		Preset Pan	400°/sec	
	Range	Manual Tilt	0.1~90°/sec	
		Preset Tilt	200°/sec	
Range	Panning	0~360° (Endless)		
	Tilting	0~180°		
Number of Auto PAN		4		
Number of Preset		128		
Number of Pattern		3		
Functions	Number of Privacy Zone		16	
	Day & Night		Color/BW/Auto (Moving Filter)	
	Line Lock		INT/Line Lock	
	White Balance		ATW1/ATW2/AWC/MANUAL	
	D-Zoom		Yes (~16x)	
	High Speed Shutter		Yes (OFF ~ 1/10K)	
	Motion Detection		Yes	
	Sens Up		Yes (2x ~ 256x)	
	Camera ID		Max 20 Character	
	Remote Control		RS485(Half&Full Duplex)/RS422	
	Alarm	Input	8	
		Output	3(Open Collector 1 relay)	
Wide Dynamic Range		N/A	Yes	
Horizontal Resolution		540(Color)/570(BW) TV Lines		
Video Output		VBS 1.0Vp-p		
S/N Ratio		About 50 dB		
Lens	Focal Length	3.55 ~ 113mm		
	Zoom Ratio	32x Optical		
	Aperture Ratio	F1.69(W)/F4.17(T)		
	Viewing Angle	Tele	1.78°(H) x 1.34°(V)	
Wide		56.41°(H) x 43.01°(V)		
Operating Temperature		-10°C ~ + 50°C		
Operating Humidity		Less than 90%		
Power Requirement		NTSC : AC24 V, 60Hz / PAL : AC24 V, 50Hz		
Power Consumption		19W	20W	
LED Indicator		Yes		
Dimensions		177(φ) X 233.5(H)mm		
Weight		2400g		
Color		Silver		

I Housing Installation Guide

Ceiling Installation

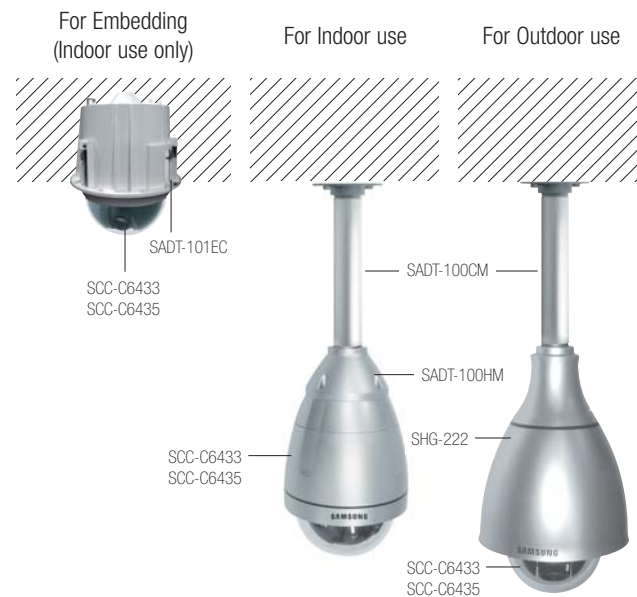

Pole Installation




Pole (1.5" NPT) Installation



Wall Installation



Corner Installation

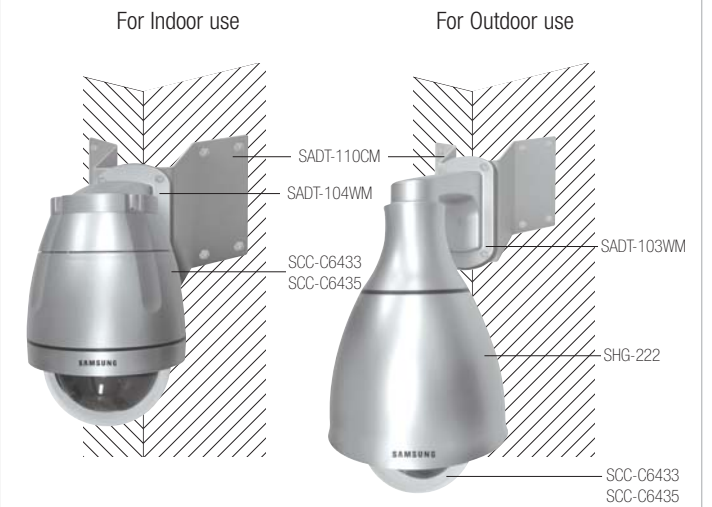

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>